


MM1A-0626SPSM

Double Balanced Mixer/LO Amplifier

DEVICE OVERVIEW

General Description

The MM1A-0626SPSM is a versatile, robust, and broadband double balanced mixer with an integrated broadband LO driver amplifier. The MM1A-0626SPSM is ideal for applications with wide bandwidths and operation through the K band. The integrated LO driver amplifier allows for operation with LO powers as low as -4 dBm while retaining exceptional conversion loss and linearity.




Features

RF/LO response: 6GHz - 26 GHz
 IF response: DC – 9 GHz
 Conversion Loss: 7.5 dB
 Minimum LO drive: -4 dBm

Applications

- Test and Measurement Equipment
- SATCOM
- Radar
- Low LO Drive Applications

Functional Block Diagram

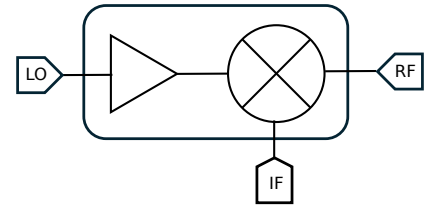

Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MM1A-0626SPSM	Double Balanced Mixer/LO Amplifier	QFN	REACH RoHS	Released	EAR99
EVB-MM1A-0626S	Evaluation Board, Integrated Drive GaAs MMIC Mixer	EVB	RoHS REACH	Released	EAR99

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Recommended Operating Conditions
 - Electrical Specifications
 - Typical Performance Plots
 - Spur Tables
- **Operation**
 - Application Information
 - Application Circuit
 - Application Circuit Description
- **Mechanical Data**
 - Outline Drawing
- **Footprint Image**
- **Evaluation Board**
 - Evaluation Board Outline Drawing


Revision History

Revision Code	Revision Date	Comment
-	2024-12-10	Initial Release

Port Configuration and Functions

Port Diagram

A top-down x-ray view of the MM1A-0626SPSM's PSM package outline drawing is shown below. The MM1A-0626SPSM has the input and output ports given in Port Functions.

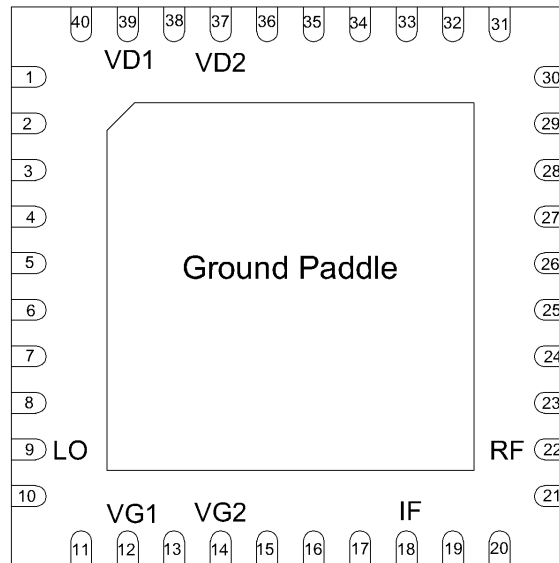

Port Functions

Port	Function	Description	DC Equivalent Circuit
Pin 12	Vg1	Pin 12 provides bias for an internal current mirror that sets the current draw for amplifier input stage. Increasing current will increase gain at the expense of efficiency. The default series resistor (270 Ohms) is chosen to optimize gain, output power and efficiency when Vg1 and Vd1 are both tied to 5V.	-
Pin 14	Vg2	Pin 14 provides bias for an internal current mirror that sets the current draw for amplifier output stage. Increasing current will increase gain at the expense of efficiency. The default series resistor (82.5 Ohms) is chosen to optimize gain, output power and efficiency when Vg2 and Vd2 are both tied to 5V.	-
Pin 18	IF	Pin 18 is diode coupled and AC matched to 50Ω over the specified IF port frequency range.	-
Pin 22	RF Input / Output	Pin 22 is DC short and AC matched to 50Ω over the specified RF frequency range.	-
Pin 37	Vd2	Pin 37 is the DC supply pin for the amplifier's output stage.	-
Pin 39	Vd1	Pin 39 is the DC supply pin for the amplifier's input stage.	-
Pin 9	LO Input	Pin 9 is DC open and AC matched to 50Ω over the specified LO frequency range.	-

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime. All Absolute Maximum Ratings are individual and should not be met in parallel.

Parameter	Maximum Rating	Unit
Bias Current (I _{g1} +I _{g2})	95	mA
Bias Voltage (V _{g1} ,V _{g2})	6	V
Drain Current (I _{d1} +I _{d2})	400	mA
Drain Supply Voltage (V _{d1} ,V _{d2})	6	V
Maximum Operating Temperature	85	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-40	°C
Minimum Storage Temperature	-65	°C
Pin 18 DC Current (RF)	15	mA
Power Handling, at any Port	15	dBm

Package Information

Parameter	Details	Rating
Dimensions	-	6 x 6 mm
Moisture Sensitivity Level	-	MSL 1

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Ambient Temperature	-40	25	85	°C
Power Supply DC Voltage (V _g)	-	5	-	V
LO Input Power	-4	6	10	dBm
Power Supply DC Current (I _d) (No RF Input) ¹	121	218	259	mA
Power Supply DC Voltage (V _d)	-	5	-	V
Power Supply DC Current (I _g) (No RF Input) ²	11	19	23	mA

^[1] Recommended operating current conditions without RF input applied. Bias current into V_d pin.

^[2] Recommended operating current conditions without RF input applied. Bias current into V_g pin.

Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for a down conversion application with a +6dBm LO input to the integrated LO driver amp biased at +5Vd1/+5Vd2/+5Vg1/+5Vg2 unless otherwise specified.









Parameter	Test Conditions	Min	Typ	Max	Unit
Conversion Loss ¹	RF/LO = 6 - 26 GHz I = 91MHz	-	7.5	-	dB
Conversion Loss ²	RF/LO = 6 - 26 GHz I = DC - 9 GHz	-	9	-	dB
IF Frequency Range	-	0	-	9	GHz
Input 1 dB Gain Compression Point (P1dB)	RF=7GHz, LO=7.091GHz, IF=91MHz	-	14	-	dBm
Input IP3	RF/LO = 6 - 26 GHz I = 91 MHz	-	27	-	dBm
LO Frequency Range	-	6	-	26	GHz
LO Leakage, LO to IF	IF/LO= 6 - 26 GHz	-	15	-	dBm
LO Leakage, LO to RF	RF/LO= 6 - 26 GHz	-	30	-	dBm
Noise Figure ³	RF/LO = 6 - 26GHz I = DC - 9 GHz	-	7.5	-	dB
RF Frequency Range	-	6	-	26	GHz
RF to IF Isolation	RF = 6 - 26 GHz	-	34	-	dB









[1] Measured as a down converter to a fixed 91 MHz IF.





[2] Measured as a down converter.

[3] Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.

Typical Performance Plots

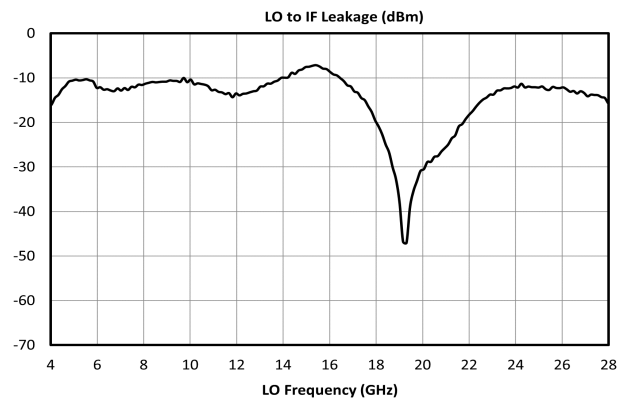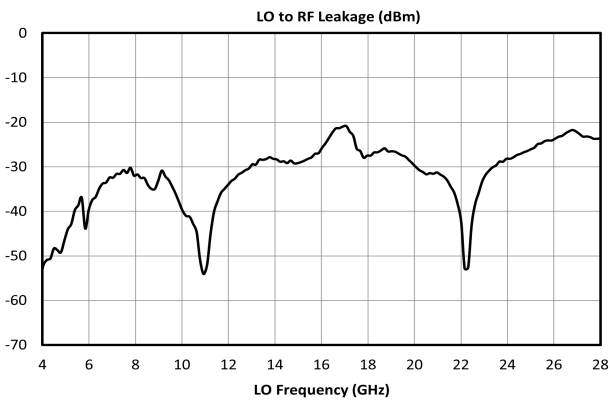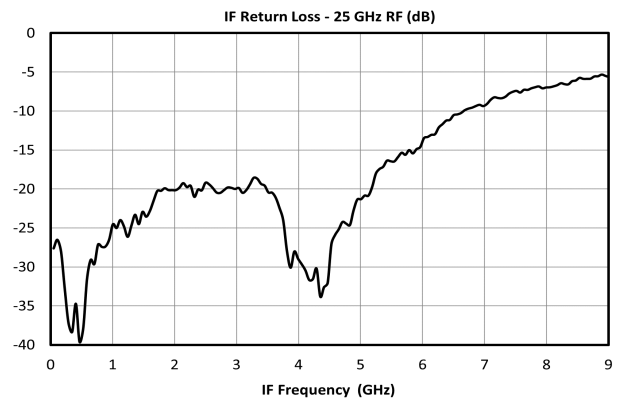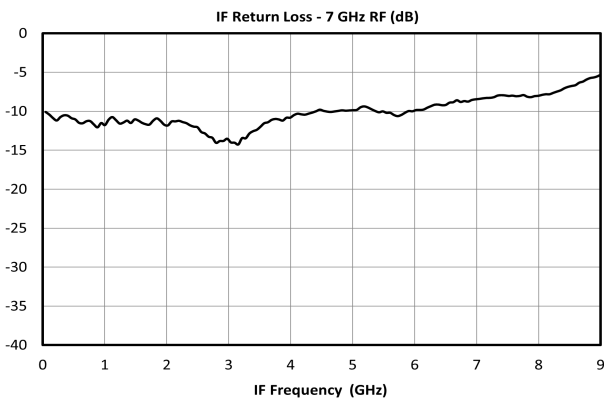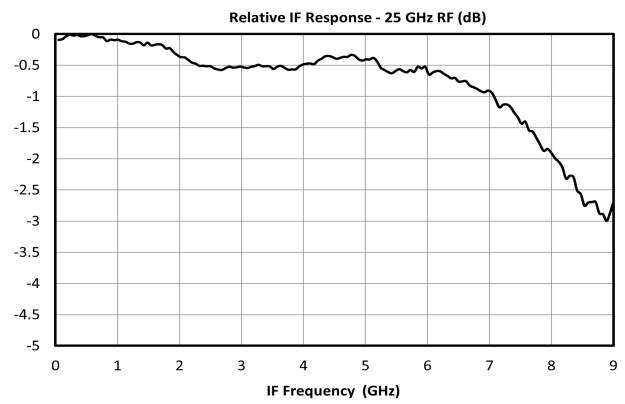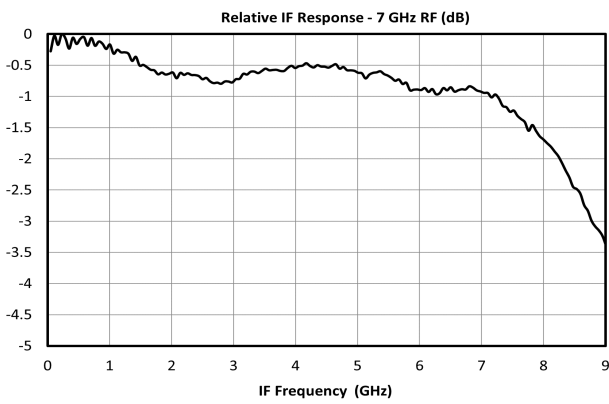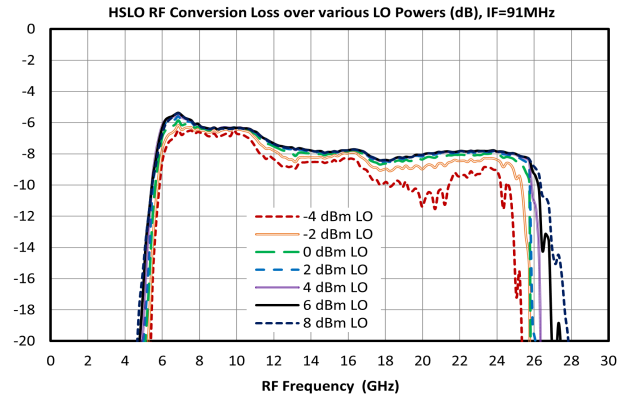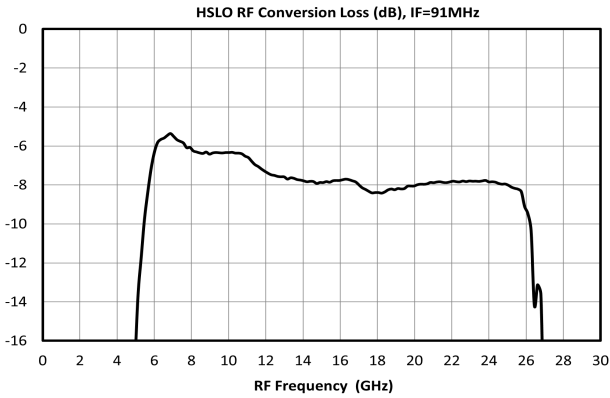

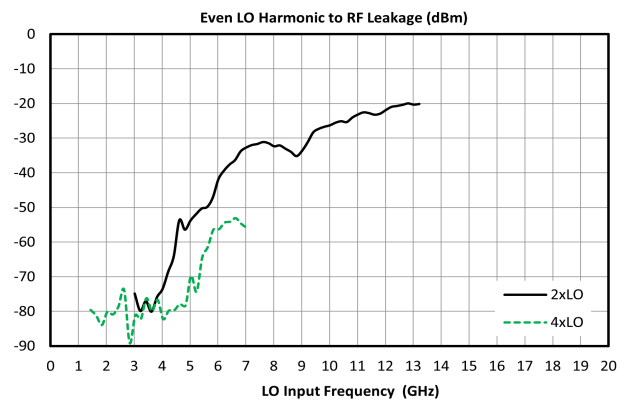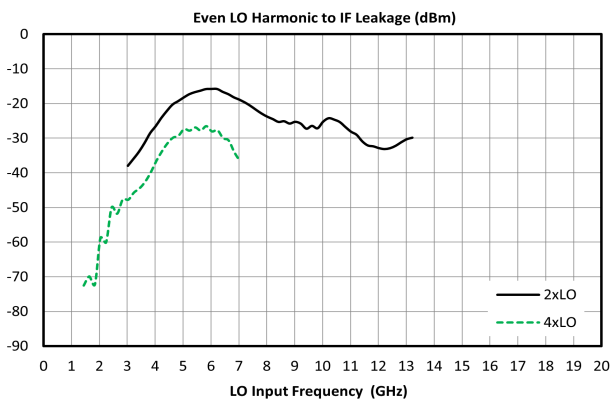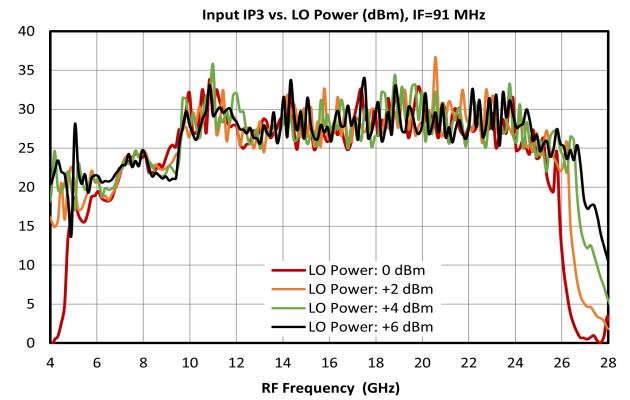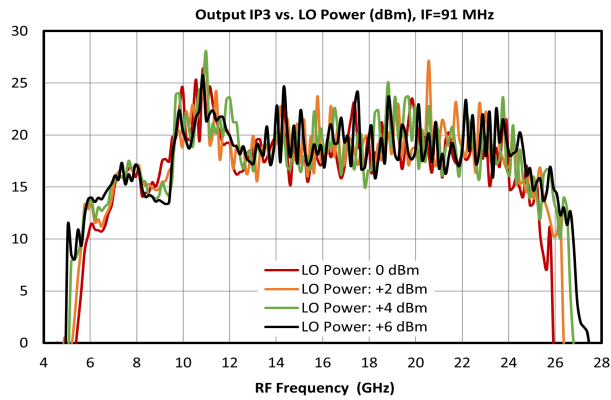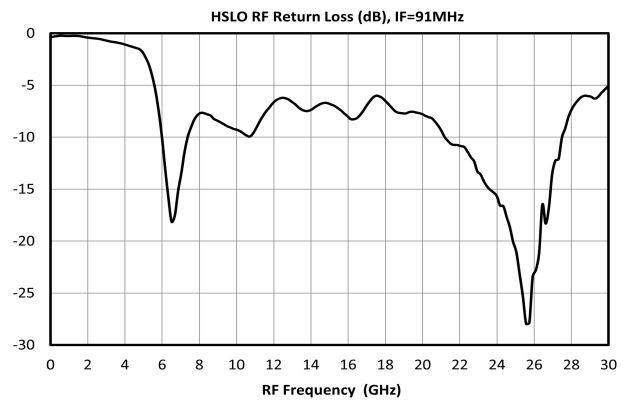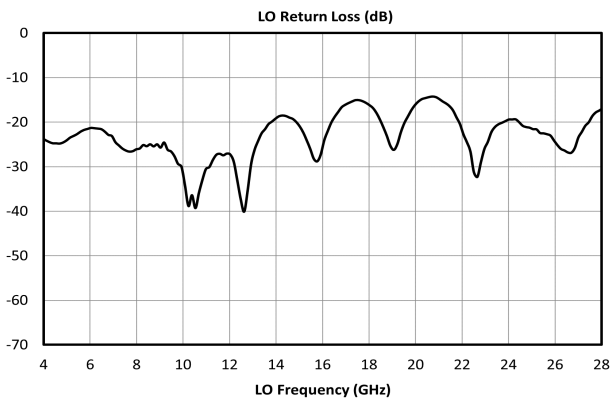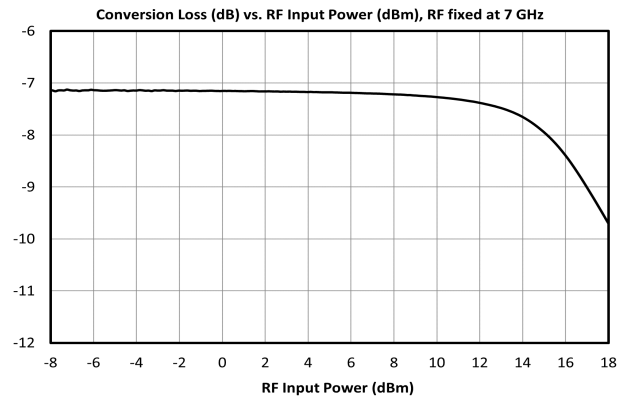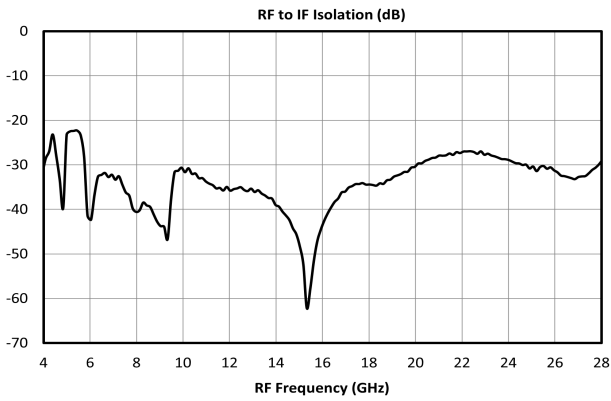

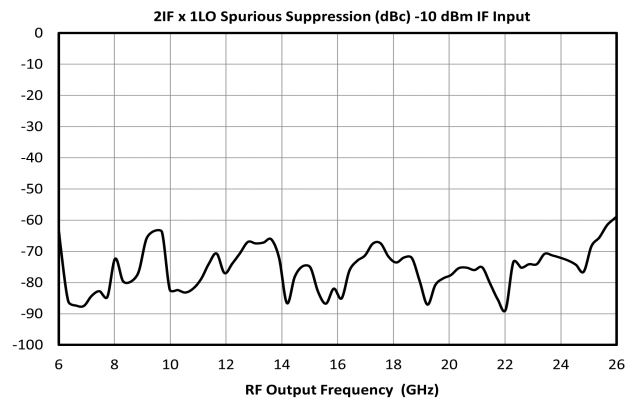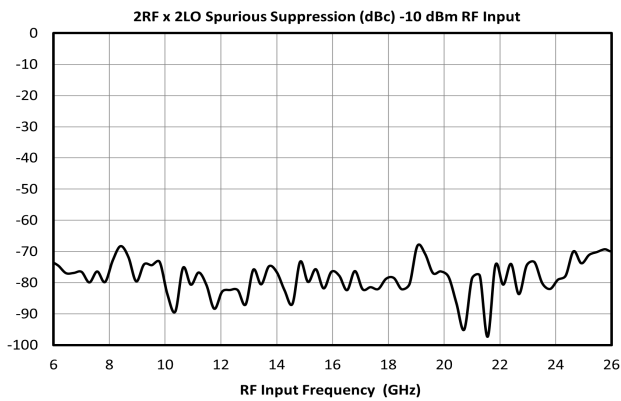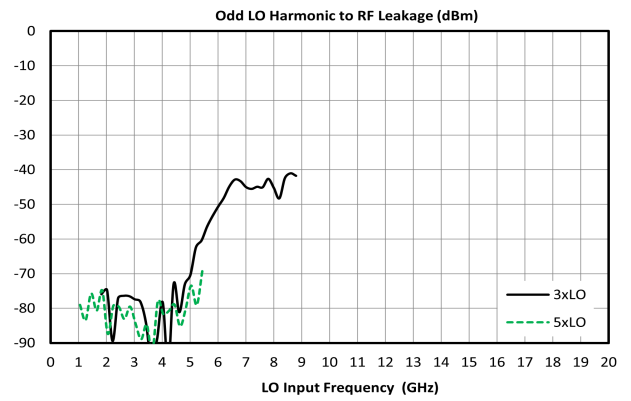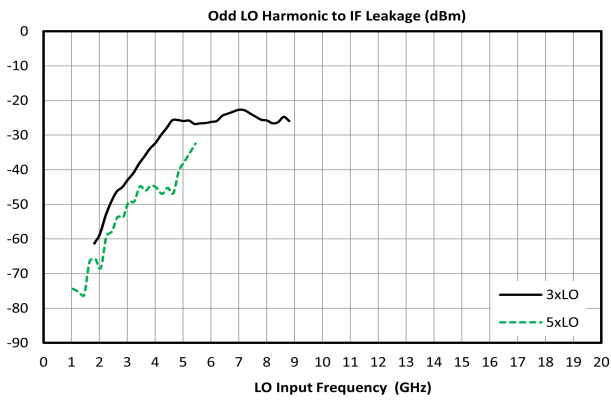

Spur Table

Typical Spurious Performance: Down-Conversion

Typical spurious data is provided by selecting RF and LO frequencies ($\pm m \cdot LO \pm n \cdot RF$) within the RF/LO bands, to create a spurious output within the IF band. The mixer is swept across the full spurious band and the mean is calculated. The numbers shown in the table below are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by (n-1), where “n” is the RF spur order. For example, the 2RF x 2LO spur is 78 dBc for a -10 dBm input, so a -20 dBm RF input creates a spur that is (2-1) x (-10 dB) lower, or 88 dBc. Data is shown for the frequency plan in 3.6 Typical Performance. mLOx0RF plots can be found in section 3.6.2 .

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xRF	25	Reference	26	12	23	18
2xRF	81	76	78	78	77	78
3xRF	93	85	88	88	91	90
4xRF	99	99	101	99	99	99
5xRF	110	108	112	109	108	108

Typical Spurious Performance: Up-Conversion


Typical spurious data is taken by mixing an input within the IF band, with LO frequencies ($\pm m \cdot LO \pm n \cdot IF$), to create a spurious output within the RF output band. The mixer is swept across the full spurious output band and the mean is calculated. The numbers shown in the table below are for a -10 dBm IF input. Spurious suppression is scaled for different IF input power levels by (n-1), where “n” is the IF spur order. For example, the 2IFx1LO spur is typically 76 dBc for a -10 dBm input with a sine-wave LO, so a -20 dBm IF input creates a spur that is (2-1) x (-10 dB) lower, or 86 dBc. Data is shown for the frequency plan in 3.6 Typical Performance.

-10 dBm IF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xIF	26	Reference	26	11	23	17
2xIF	79	76	73	73	69	71
3xIF	87	92	88	88	84	80
4xIF	95	103	104	99	101	102
5xIF	108	113	113	111	113	112

Application Information

The application circuit for the MM1A-0626SPSM requires 10 μ F bypass capacitors on the drain lines near the QFN. A 420nH inductor is needed between the VD lines to provide isolation as well as an RC network to ground comprised of a 4.7 μ F capacitor and 10 Ω resistor. The VG lines require 4.7 μ F bypass capacitors and series resistors of 270 Ω in line with the VG supply. The current evaluation circuit is configured for single supply operation, but can be operated as dual supply by removing the 420nH inductor.

Application Circuit

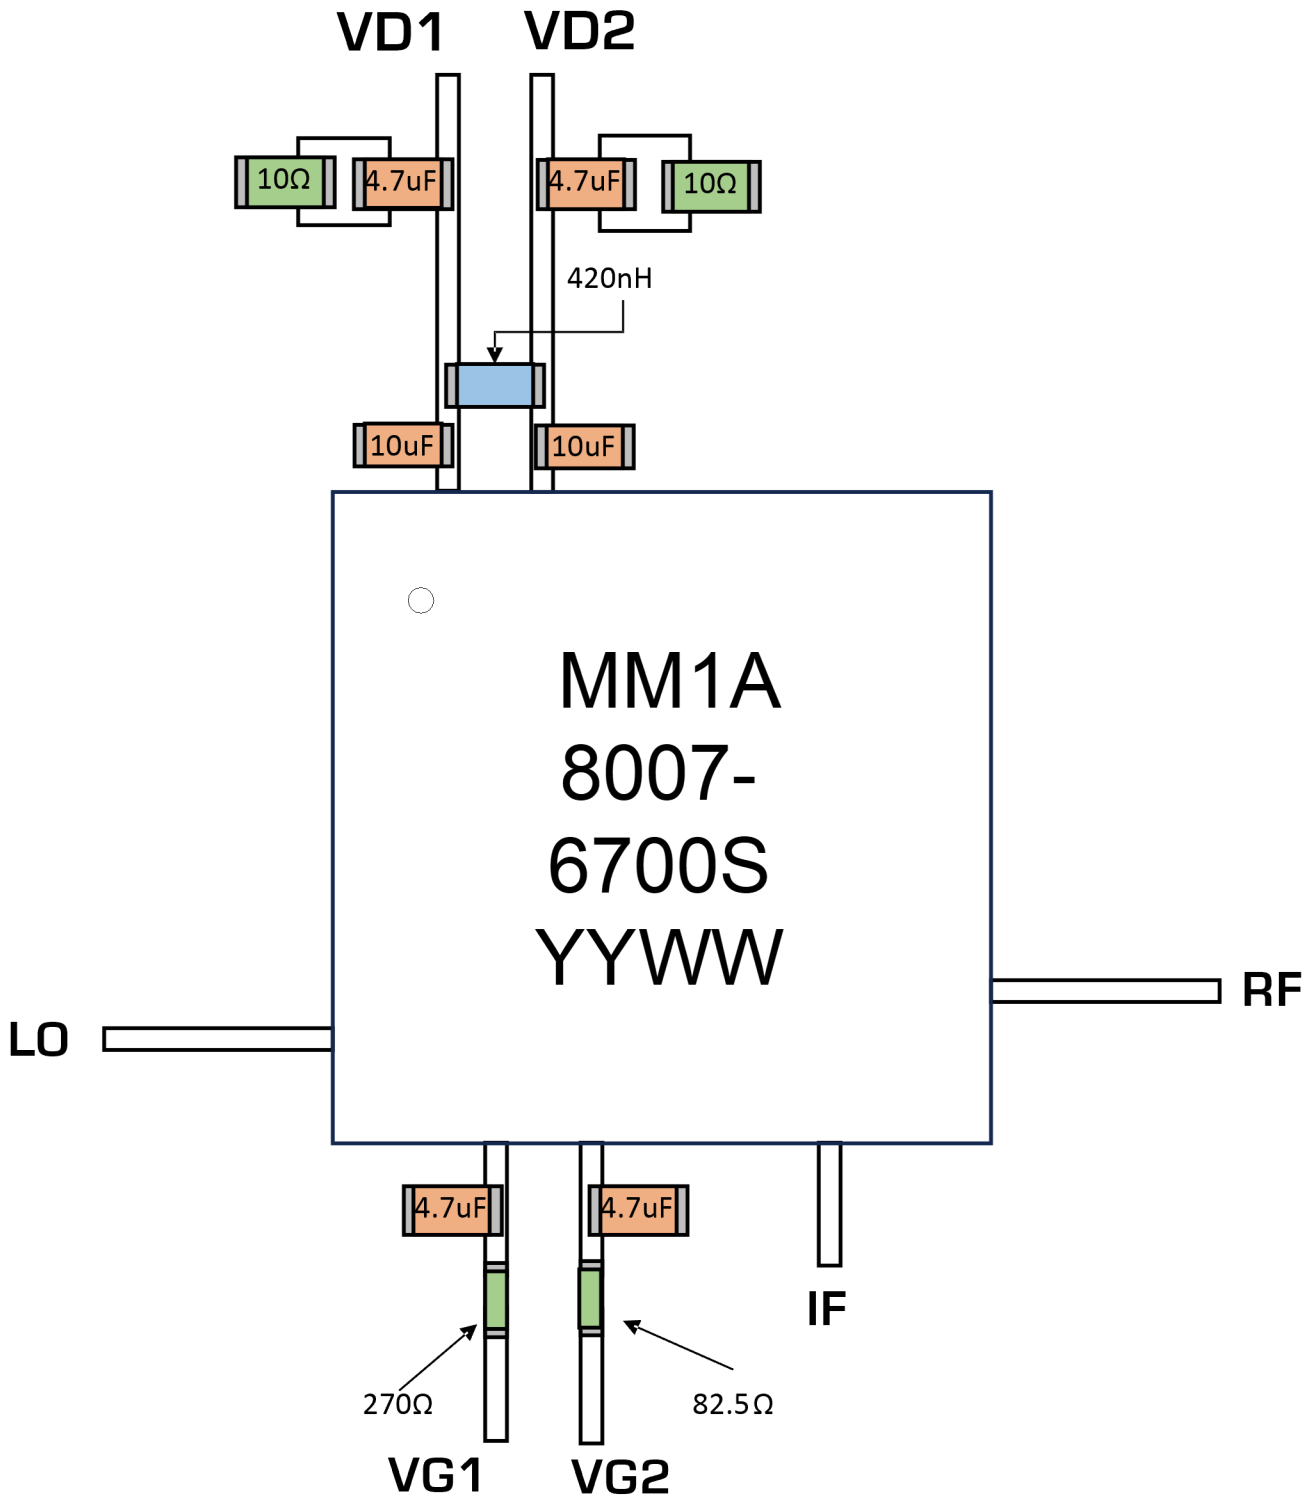

Application Circuit Description

Ports Operation

IF Port – Used as input on an upconversion, output on downconversion, or LO port in a band shifting application. Signals should be connected by 50 ohm microstrip or coplanar traces to well matched broadband 50 ohm sources and loads.

RF Port – Used as input on a downconversion, output on upconversion, or output in a band shifting application. Signals should be connected by 50 ohm microstrip or coplanar traces to well matched broadband 50 ohm sources and loads.

LO Port – The noise floor of the LO input signal should be less than the value of the noise floor plus isolation of the mixer, or a filter is recommended to prevent reduction in dynamic range. An integrated LO amplifier is included, allowing for superior performance with LO power below the typical recommended drive level.

Filtering and Matching- Filtering is generally desired for spurious and image removal on the output port of the mixer. Reflective filters can cause out of band signals to reflect back into the mixer and cause conversion loss ripple, erroneous spurs, and other undesired behaviors. To eliminate these problems it is recommended that the filters be placed as close to the output port as possible. If undesired behavior is still observed, a diplexer with one port terminated or a 1-3 dB attenuator may reduce this problem.


RF Ground – The ground paddle of the QFN should be connected to a low noise RF ground with very low electrical resistance for high frequency operation.

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D STP](#)

***All dimensions are typical**

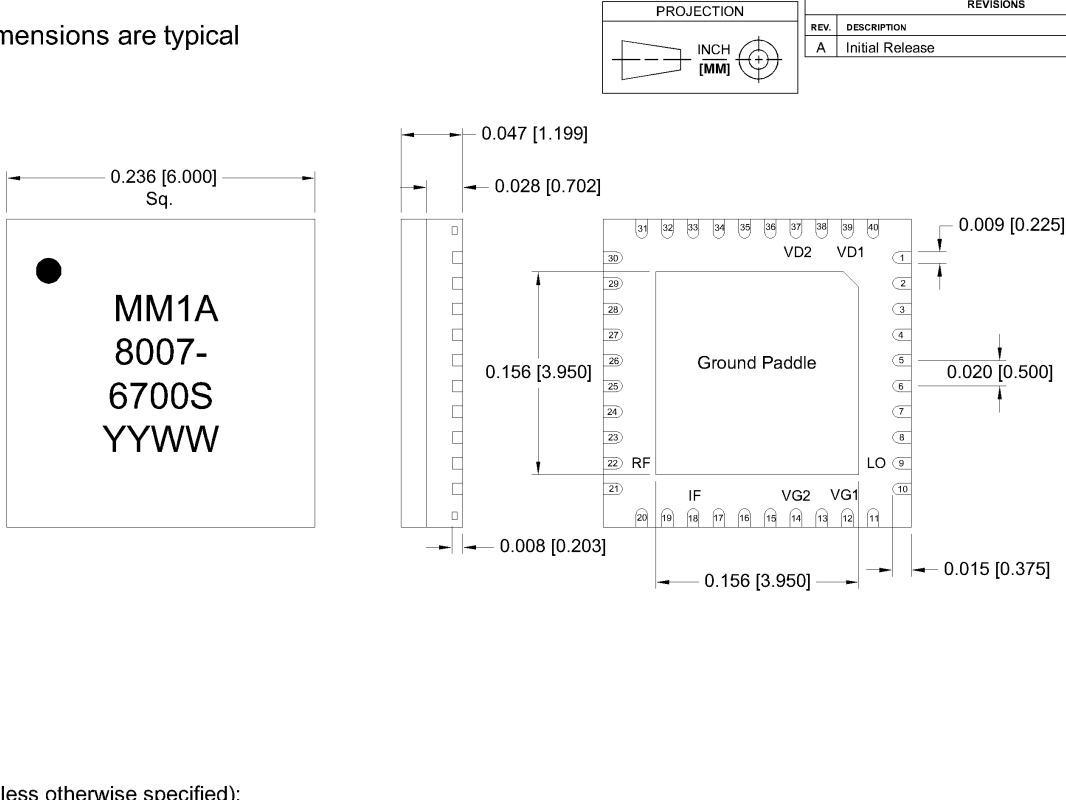


PROJECTION
INCH [MM]

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVALS
A	Initial Release	1/29/25	AT

Pin #	Function
1	N/C
2	N/C
3	N/C
4	N/C
5	N/C
6	N/C
7	N/C
8	N/C
9	LO
10	N/C
11	N/C
12	VG1
13	N/C
14	VG2
15	N/C
16	N/C
17	N/C
18	IF
19	N/C
20	N/C
21	N/C
22	RF
23	N/C
24	N/C
25	N/C
26	N/C
27	N/C
28	N/C
29	N/C
30	N/C
31	N/C
32	N/C
33	N/C
34	N/C
35	N/C
36	N/C
37	VD2
38	N/C
39	VD1
40	N/C

Notes (unless otherwise specified):



- Substrate material is LCP.
- I/O Leads and Die Paddle is (from base to finish):
 Ni: 0.5um - 2.0um
 Pd: 0.08um - 0.15um
 Au: 0.003um MIN
- All unconnected pins should be connected to PCB RF ground.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	NOTES:	 345 Digital Drive Morgan Hill, CA 95037 Outline, Amp-Mixer Copackaged in 6 mm Plastic QFN
HOLE SIZE DECIMALS ANGLES XXXL .02 ± XXXXL .005	DRAWN BY DATE OG 7/31/2024	
MATERIAL: Noted	SIZE CAGE CODE DWG. NO. A 0UC32 MM1A-0626SPSM	
FINISH:	SCALE 10:1 SHEET 1 OF 1	

Proprietary: This document was originated by and is the property of Marki Microwave. Unauthorized disclosure is prohibited. **DO NOT SCALE DRAWING**


Footprint Image

Download : [Footprint Drawing](#)

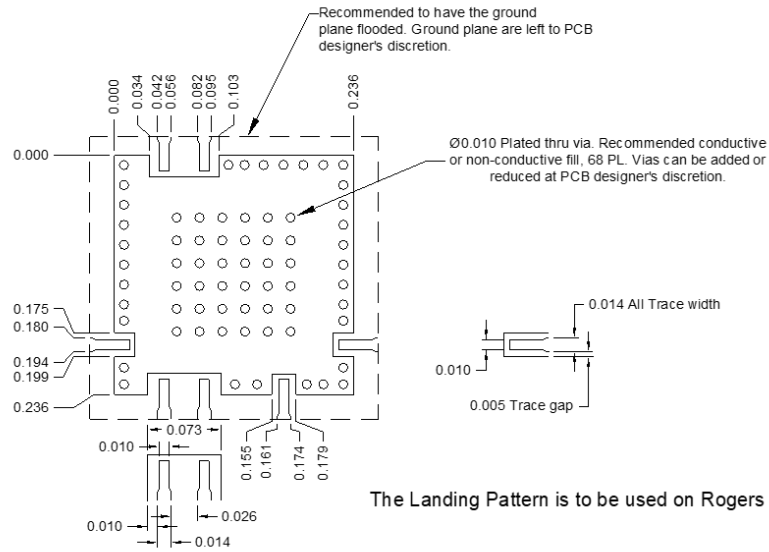

Evaluation Board - Outline Drawing

All Dimensions are typical.

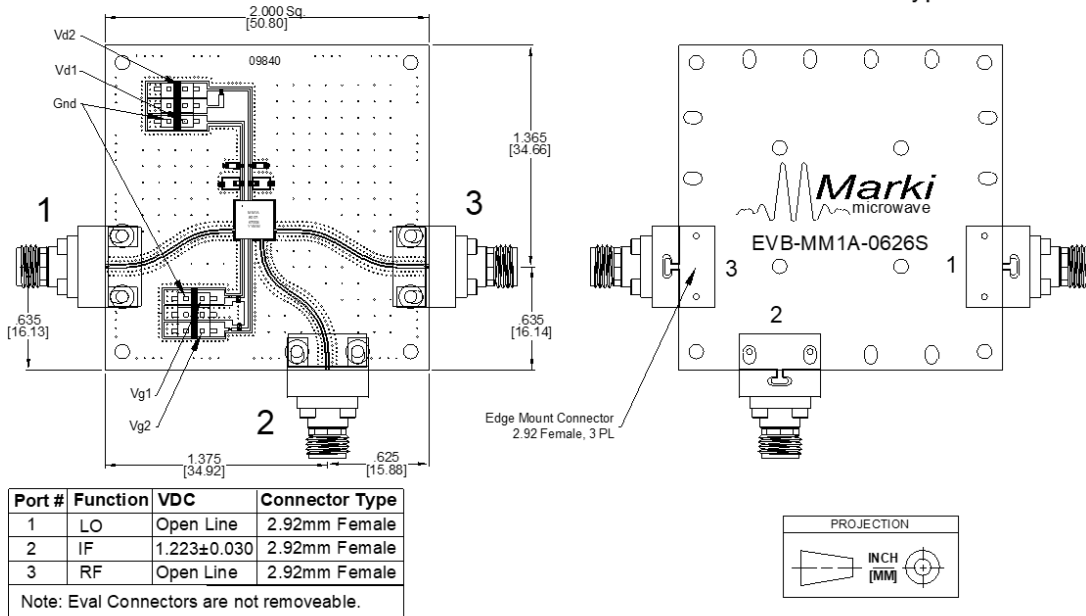

RoHS Compliant (SN96.5/AG3.5) Components/Assembly

DISCLAIMER

MARKI MICROWAVE, LLC., (“MARKI”) PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES “AS IS” AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2024, Marki Microwave, LLC