


AKA-1310D

DC – 14 GHz Cascadable Broadband InGaP MMIC Amplifier

DEVICE OVERVIEW

General Description

The AKA-1310 is a low-cost cascadable broadband InGaP HBT MMIC amplifier. This is a general-purpose gain block amplifier which provides excellent gain flatness below 6 GHz, high P1dB, high OIP3, and a very small die size. The simple application circuit requires minimal external components, allowing it to be used in a variety of applications. It is available in bare die form.



Features

- Small Die Size: 0.4mm x 0.43mm
- Excellent Gain Flatness
- High P1dB
- +28dBm OIP3, 13dB Gain at 2GHz
- Single Power Supply Operation
- Low-Cost

Applications

- Mobile test and measurement equipment
- Radar
- SATCOM
- 5G transceivers
- Driver Amplifier L-Diode Mixers

Functional Block Diagram

N/A

Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
AKA-1310D	DC – 14 GHz Cascadable Broadband InGaP MMIC Amplifier	CH	REACH RoHS	Released	EAR99

AKA-1310D

DC – 14 GHz Cascadable Broadband InGaP MMIC Amplifier

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Recommended Operating Conditions
 - Sequencing Requirements
 - Electrical Specifications
 - Typical Performance Plots
- **Operation**
 - Application Information
 - Application Circuit
 - Application Circuit Description
- **Mechanical Data**
 - Outline Drawing


Revision History

Revision Code	Revision Date	Comment
-	2021-05-01	Datasheet Initial Release

Port Configuration and Functions

Port Diagram

A port diagram of the AKA-1310D is shown below.

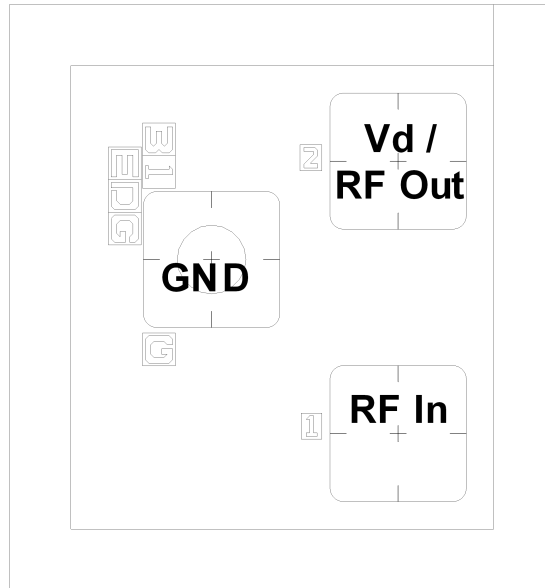

Port Functions

Port	Function	Description	Equivalent Circuit for Package
GND	Ground	Backside of the IC must be connected to a DC/RF ground with high thermal and electrical conductivity. Ground pad connected to IC backside with via.	GND ↓
RF In	RF Input	This is the RF Input port of the amplifier die. It is RF matched to 50 Ω and requires an external DC blocking capacitor.	RF In □ ———— ↓
Vd/RF Out	RF Output and Positive Device Voltage Supply Port	This is the amplifier die's RF Output and positive supply voltage port, Vd. It is RF matched to 50 Ω and is DC coupled.	□ ———— RF Out/Vd ↓

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may become inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	85	°C
Maximum Storage Temperature	150	°C
Max Junction Temperature for MTTF > 1E6 Hours	150	°C
Minimum Operating Temperature	-40	°C
Minimum Storage Temperature	-65	°C
Positive Bias Current (Icc)	79	mA
Power Dissipation	366	mW
RF Input Power	20	dBm
θJC, Junction to Case Thermal Resistance	179	°C/W

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Dimensions	-	0.40 x 0.43 mm

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Positive DC Device Voltage (Vd)	4.5	4.6	4.7	V
Ambient Temperature	-40	25	85	°C
Positive DC Current (Icc)	35	50	79	mA

Sequencing Requirements

There is no sequencing required to power up or power down the amplifier.

AKA-1310D









DC – 14 GHz Cascadable Broadband InGaP MMIC Amplifier

Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Die are 100% DC tested.



Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Device Current, Icc	Vd = +4.6V	-	-	-	50	-	mA
Input Return Loss	Vd = +4.6 V, Icc = 50 mA	0.1	14	-	18	-	dB
Noise Figure	Vd = +4.6 V, Icc = 50 mA	3	3	-	5	-	dB
Output IP3	Vd = +4.6 V, Icc = 50 mA	2	2	-	28	-	dBm
Output P1dB	Vd = +4.6 V, Icc = 50 mA	2	6	-	14	-	dBm
Output P1dB	Vd = +4.6 V, Icc = 50 mA	6	14	-	13	-	dBm
Output Return Loss	Vd = +4.6 V, Icc = 50 mA	0.1	14	-	20	-	dB
Reverse Isolation	Vd = +4.6 V, Icc = 50 mA	0.1	14	-	17	-	dB
Small Signal Gain	Vd = +4.6 V, Icc = 50 mA	0.1	6	12	13	-	dB
Small Signal Gain	Vd = +4.6 V, Icc = 50 mA	6	14	9	11	-	dB

Typical Performance Plots

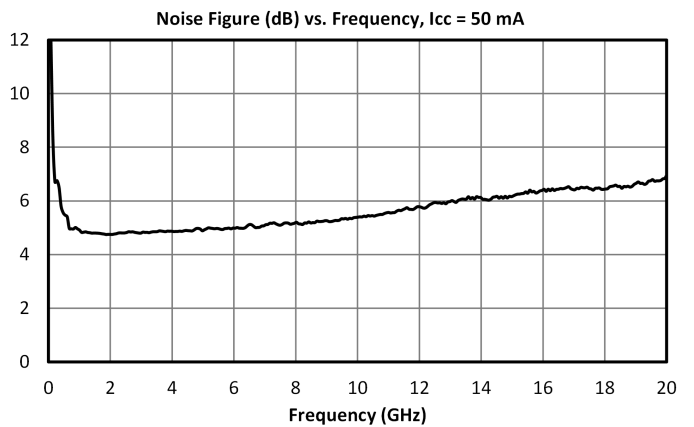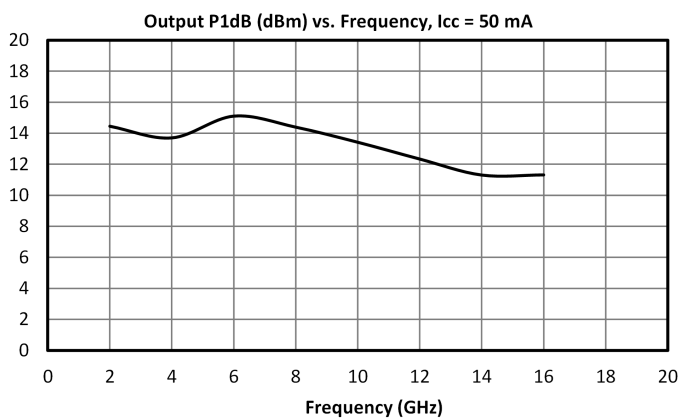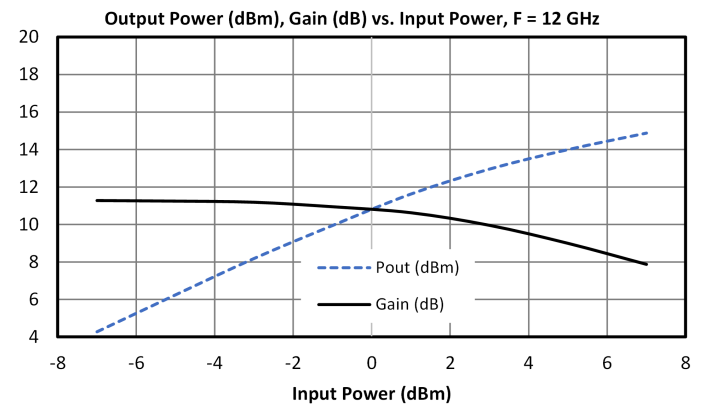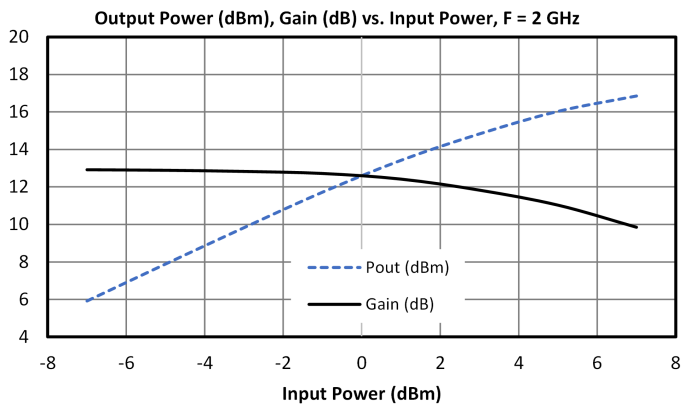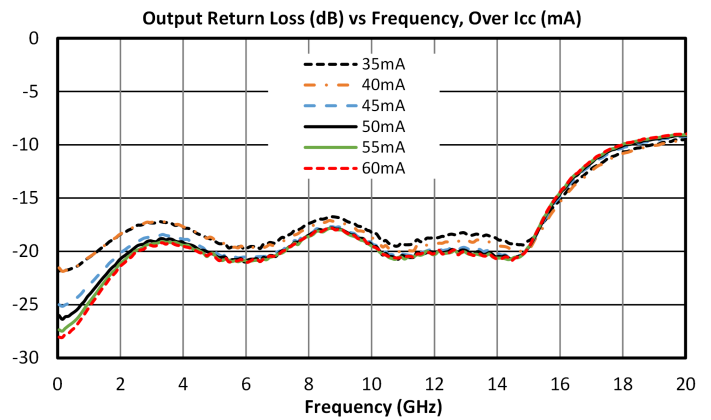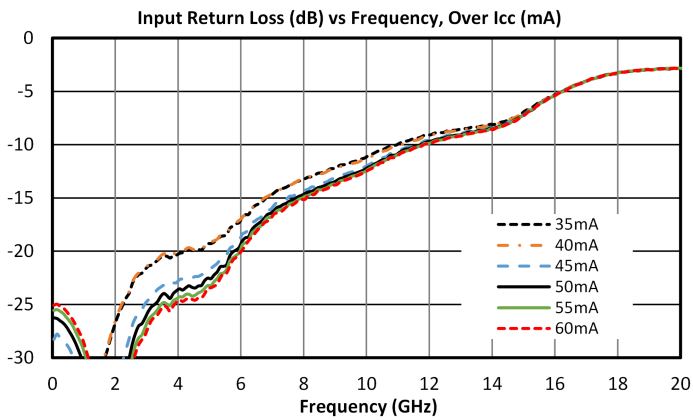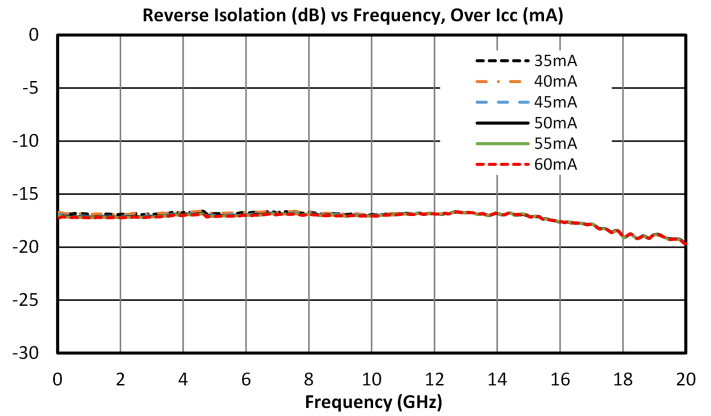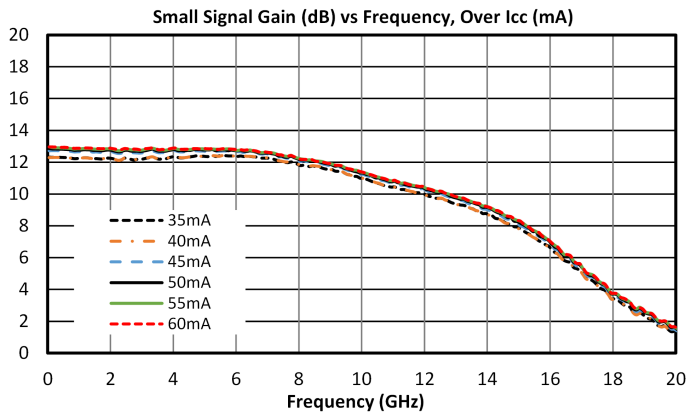

AKA-1310D

DC – 14 GHz Cascadable Broadband InGaP MMIC Amplifier

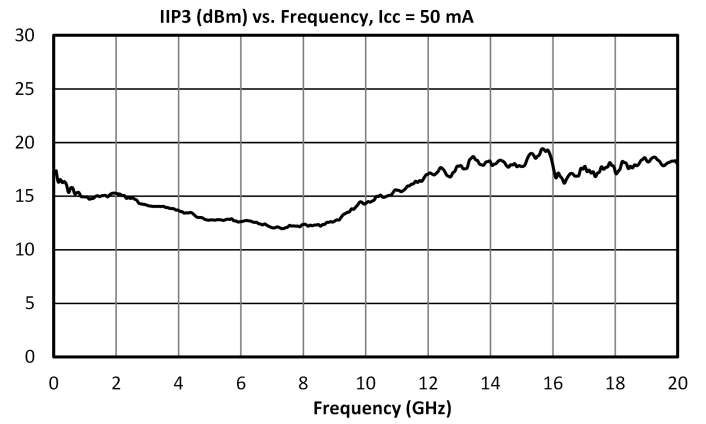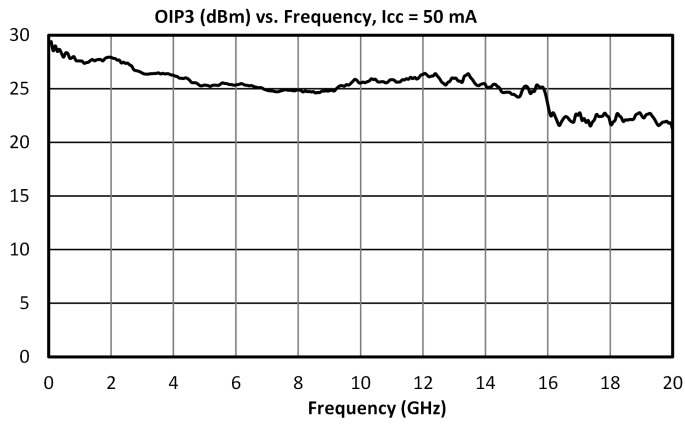



www.markimicrowave.com

AKA-1310D

DC – 14 GHz Cascadable Broadband InGaP MMIC Amplifier


Application Information

Below is the recommended application circuit for the AKA-1310D. Application circuit not drawn to scale. AKA-1310D chip is enlarged for viewing purposes.

AKA-1310D

DC – 14 GHz Cascadable Broadband InGaP MMIC
Amplifier

Application Circuit

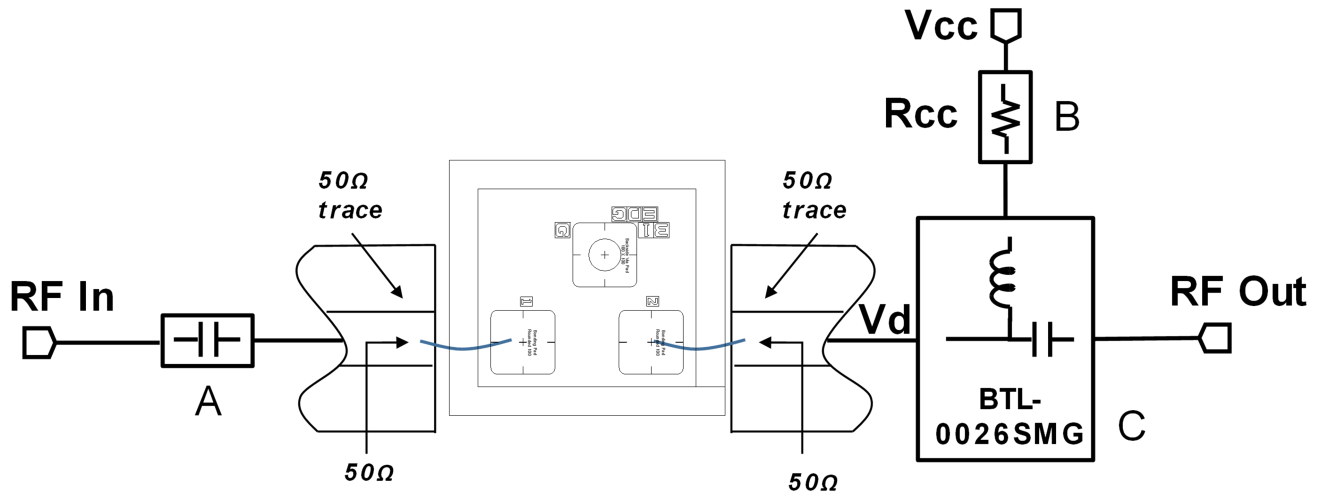

AKA-1310D

DC – 14 GHz Cascadable Broadband InGaP MMIC Amplifier

Application Circuit Description

Designator	Description	Sample Part Number
A	0402 1.0 μ F SMT Capacitor	C105A105K05NNNC
B	0402 SMT Resistor	CPF0402B20REI
C	Marki Surface-Mount Bias Tee; 500 kHz – 26 GHz	<u>BTL-0026SMG</u>

AKA-1310D

DC – 14 GHz Cascadable Broadband InGaP MMIC Amplifier

The supply voltage, V_{cc} , is dropped to the device voltage, V_d , through the biasing resistor, R_{cc} . To calculate the appropriate value of this resistor, the designer simply uses the available power supply voltage and chosen bias current as follows.

$$R_{cc} = \frac{V_{cc} - V_d}{I_{cc}}$$

AKA-1310D

DC – 14 GHz Cascadable Broadband InGaP MMIC Amplifier

Below is table of possible Rcc values.

Recommended Bias Resistor Values, Icc = 50 mA, Vd = 4.6 V						
Power Supply Voltage, Vcc (V)	5	8	10	12	15	20
Bias Resistor, Rcc (Ω)	6	68	108	148	208	308


AKA-1310D

DC – 14 GHz Cascadable Broadband InGaP MMIC Amplifier

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#)

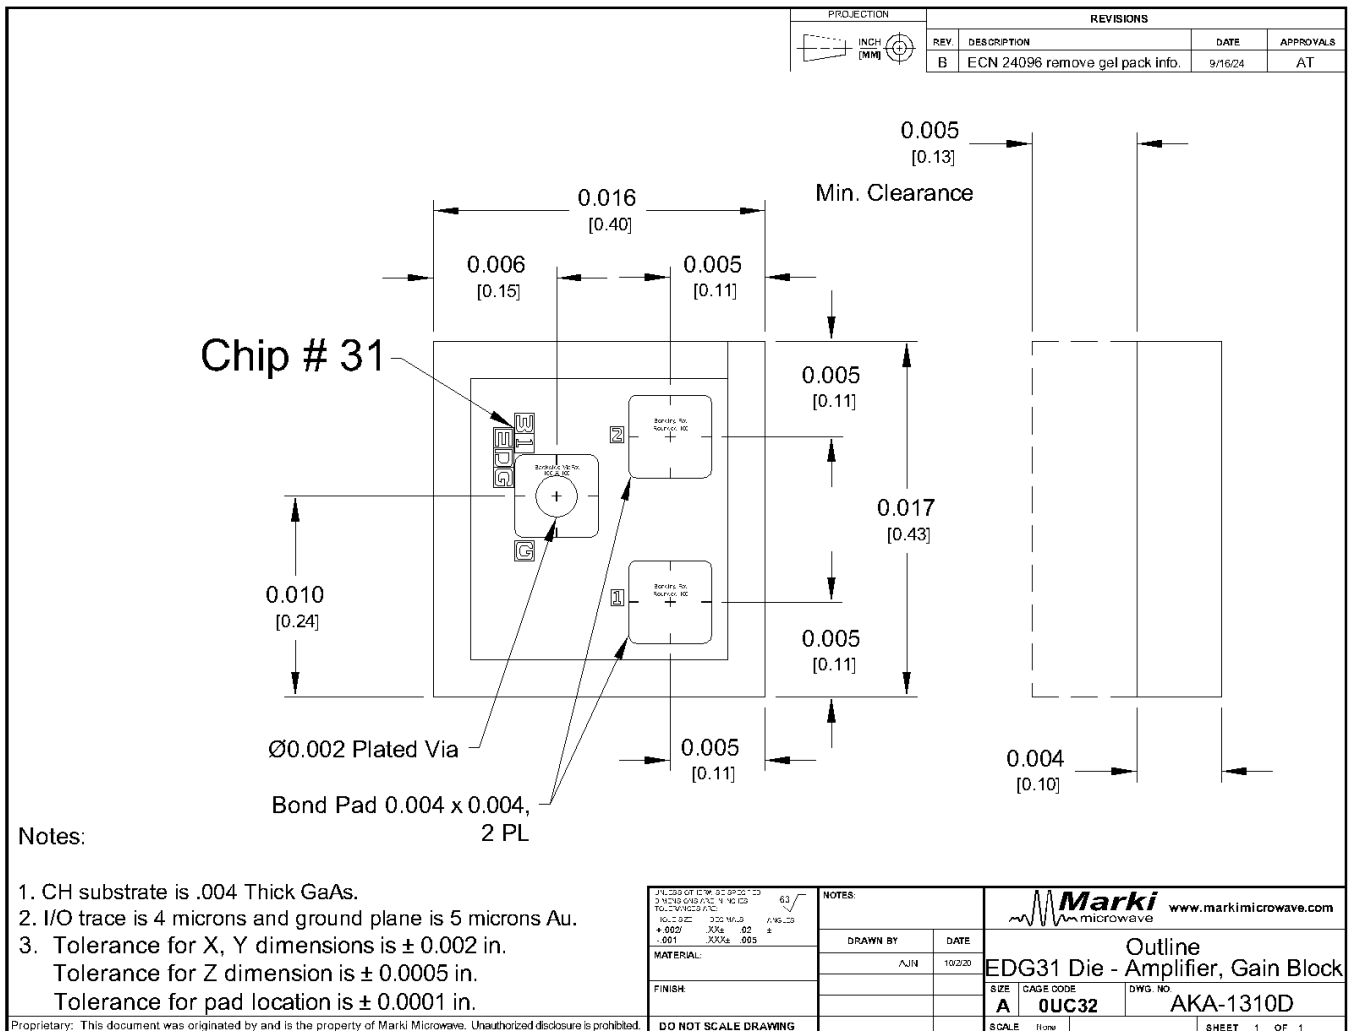

DISCLAIMER

MARKI MICROWAVE, INC., (“MARKI”) PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES “AS IS” AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2021, Marki Microwave, Inc