


NLTL-6796SM

GaAs MMIC Non-Linear Transmission Line

DEVICE OVERVIEW

General Description

NLTL-6796SM is a MMIC non-linear transmission line (NLTL) based comb generator. This NLTL offers excellent phase noise performance over a 500MHz to 3.5 GHz input frequency range with output tones beyond 40 GHz. NLTL-6796SM is fabricated with GaAs Schottky diode-based varactors and packaged into a surface mount 6mm QFN.




Features

- Low Phase Noise
- Broadband Input Frequencies
- No External DC Bias Required

Applications

- Comb Line Generation
- High Efficiency Multiplication
- Samplers
- Phase Locked Loops

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
NLTL-6796SM	GaAs MMIC Non-Linear Transmission Line	QFN	RoHS REACH	Released	EAR99
EVAL-NLTL-6796	Evaluation Board, GaAs MMIC 0.5-3.5 GHz Non-Linear Transmission Line	EVAL	RoHS REACH	Released	EAR99

Table Of Contents

■ Device Overview

- General Description
- Features
- Applications
- Functional Block Diagram

■ Port Configuration and Functions

- Port Diagram
- Port Functions

■ Revision History

■ Specifications

- Absolute Maximum Ratings
- Package Information
- Recommended Operating Conditions
- Sequencing Requirements
- Electrical Specifications
- Typical Performance Plots: Harmonic Output Power w/ Sine Input
- Typical Performance Plots: Harmonic Output Power w/ Square Wave from APM-7098PA
- Typical Performance Plots: Harmonic Output Power w/ Square Wave from ADM1-0026PA
- Typical Performance Plots: 5th Harmonic Output Power vs Bias Resistor
- Typical Performance Plots: 10th Harmonic Output Power vs Input Power
- Typical Performance Plots: Conversion Loss and Output Power vs Input Power
- Typical Performance Plots: Harmonic Magnitude vs Bias Resistor
- Typical Performance Plots: Time and Frequency Domain Plots

■ Operation

- Application Information
- Application Circuit Description

■ Mechanical Data

- Outline Drawing

■ Footprint Image

■ Evaluation Board

- Evaluation Board Outline Drawing
- Evaluation Board - Application Circuit


Revision History

Revision Code	Revision Date	Comment
-	2020-02-01	Initial Release
A	2022-10-01	Recommended Input Power Updated




Port Configuration and Functions

Port Diagram

A bottom-up view of the NLTL-6796's SM package outline drawing is shown below. The NLTL should only be used in the forward direction, with the input and output ports given in Port Functions.

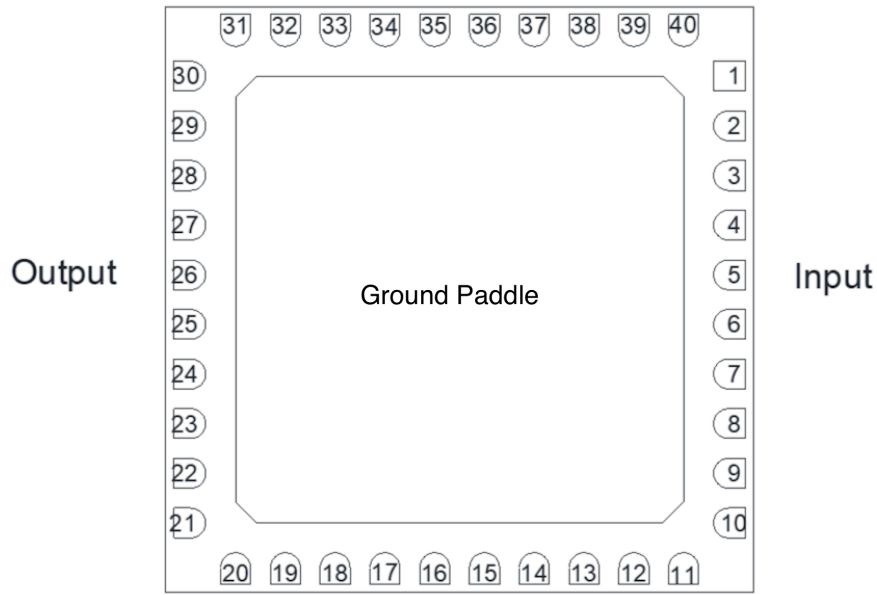

Port Functions

Port	Function	Description	DC Equivalent Circuit
GND	Ground	SM package ground path is provided through the ground paddle.	
Pin 26	Output	2x Input Frequency output port. Pin 26 is diode connected and AC matched to 50Ω.	
Pin 5	Input	Input 1x Frequency Port. Pin 5 is diode connected and AC matched to 50Ω.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Power Handling, at any Port	33	dBm

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Dimensions	-	6 x 6 mm
Moisture Sensitivity Level	-	MSL 1

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits inside which the device should be operated to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Input Power	13	20	28	dBm
Ambient Temperature	-55	25	100	°C

Sequencing Requirements

This is a passive NLTL that requires no external DC bias. Self-bias of the diodes is sufficient for operation. It is not required, but is recommended to provide a 50Ω termination to each port before applying RF power.

Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the NLTL used in the forward direction with a +20 dBm 1GHz sine wave input and no bias resistor (open circuit) unless otherwise stated. Square Wave input generated using either the ADM1-0026PA or the APM-7098PA amplifier at +7V/-0.3V and +8V/+8V respectively. Min and Max limits apply only to our connectorized units and are guaranteed at TA=+25°C. All bare die are 100% DC tested and visually inspected.


Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Highest Frequency Harmonic Output ¹	1.5 GHz Input	-	-	-	52.5	-	GHz
Highest Frequency Harmonic Output ²	1 GHz Input	-	-	-	47	-	GHz
Highest Frequency Harmonic Output ³	2 GHz Input	-	-	-	46	-	GHz
Highest Frequency Harmonic Output ⁴	3.5 GHz Input	-	-	-	28	-	GHz
Highest Frequency Harmonic Output ⁵	500 MHz Input	-	-	-	22.5	-	GHz
Input Frequency Range	-	-	-	0.5	-	3.5	GHz
Input Power ⁶	-	-	-	-	20	-	dBm
Output Frequency Range	-	-	-	0.5	-	50	GHz

[1][2][3][4][5] The Highest Frequency Harmonic Output was determined as the highest frequency harmonic that was above a -60dBm threshold as seen on a spectrum analyzer.

[6] Input power to square wave driver amps is lower but high enough to saturate the amplifier. Power levels in square wave plots refer to input power to the amplifier, not the amplifier's output power.









Input power levels refer to drive level going into the NLTL chain input in Application Circuit. Square wave plots are referenced to drive level entering the square wave driver amplifier, not the output power of the amplifiers.




Typical Performance Plots: Harmonic Output Power w/ Sine Input

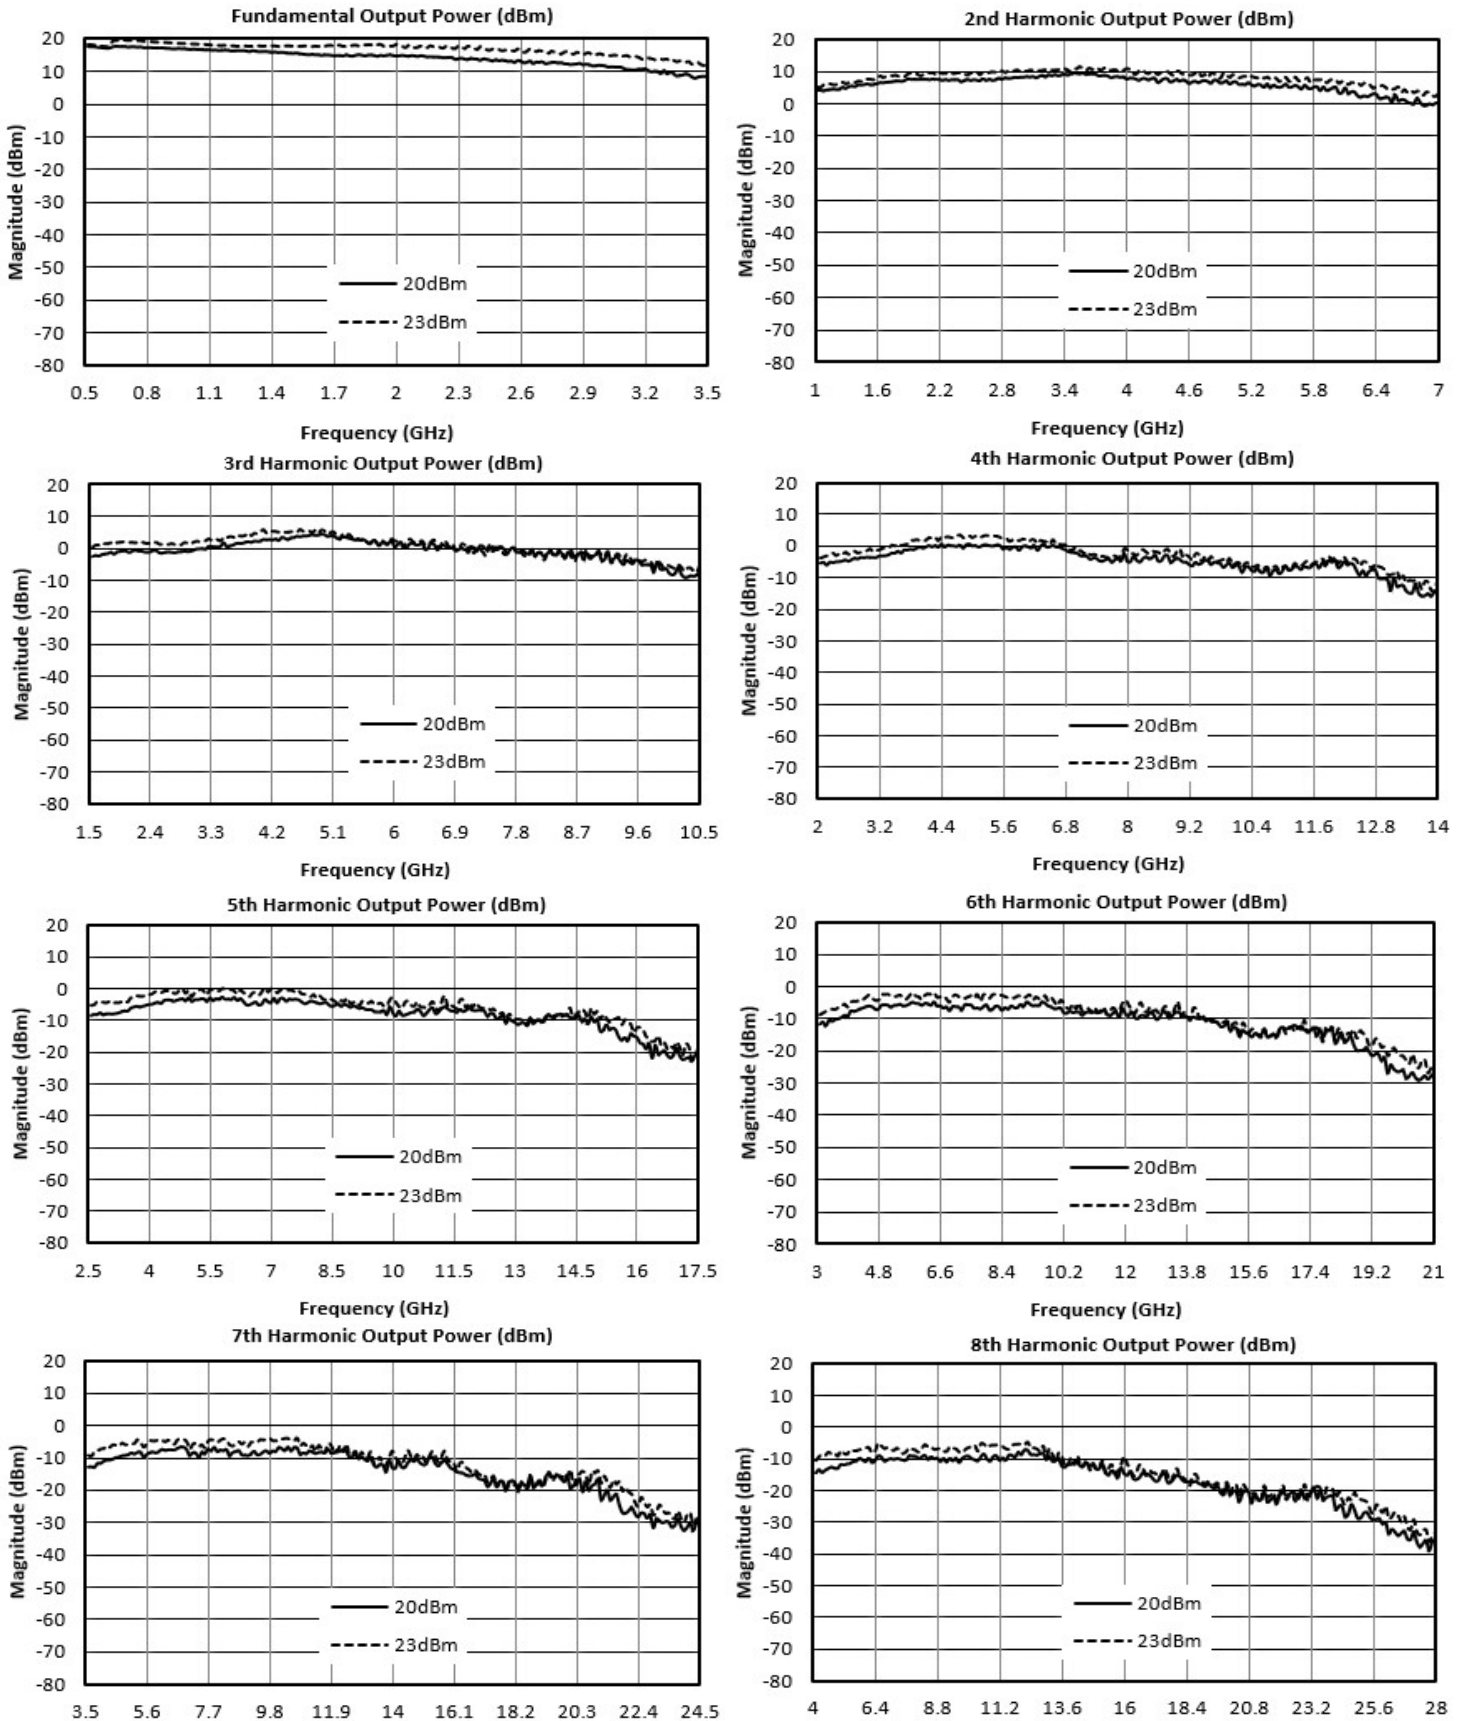









NLTL-6796SM









GaAs MMIC Non-Linear Transmission Line

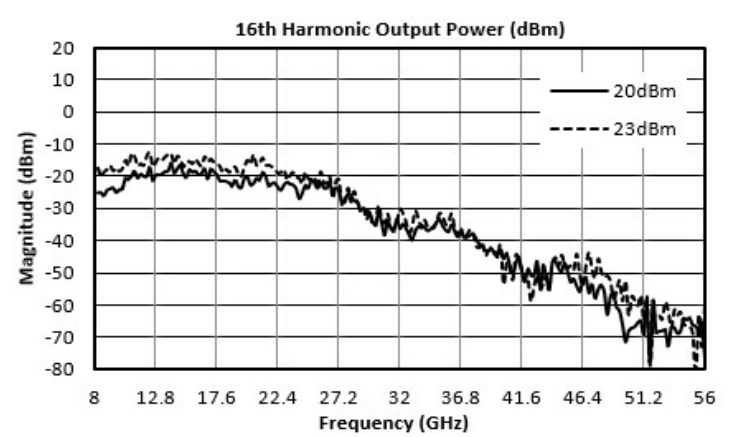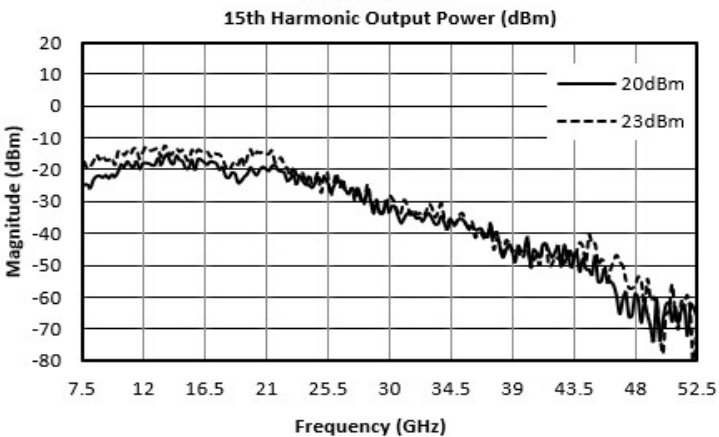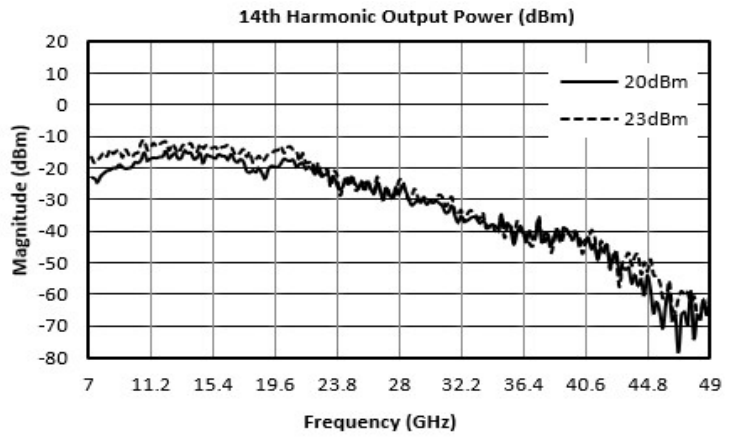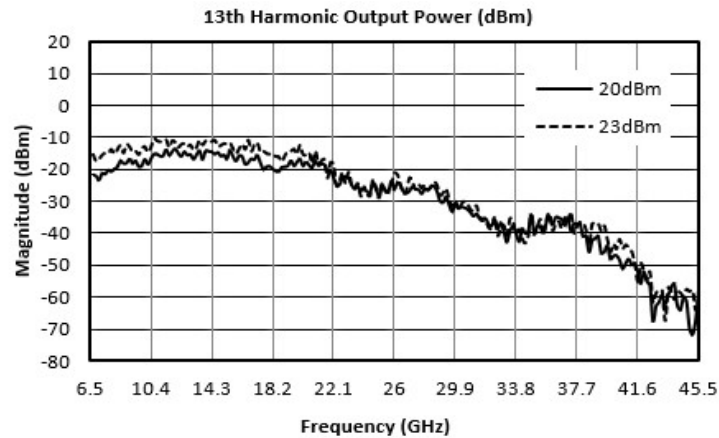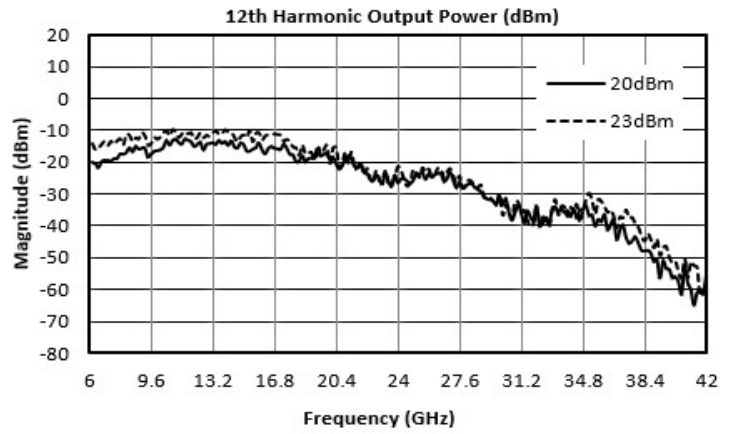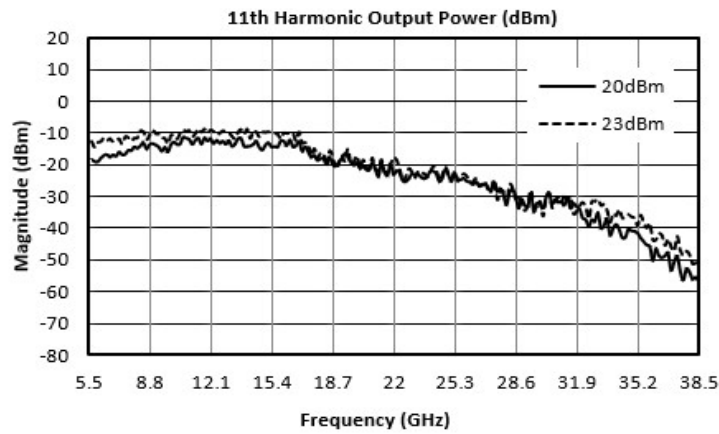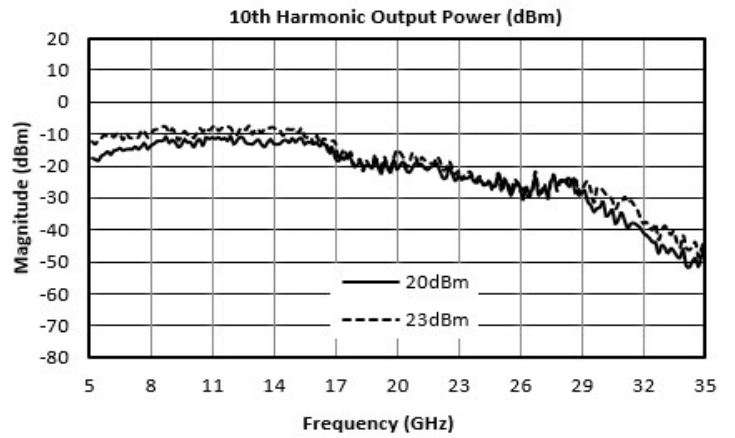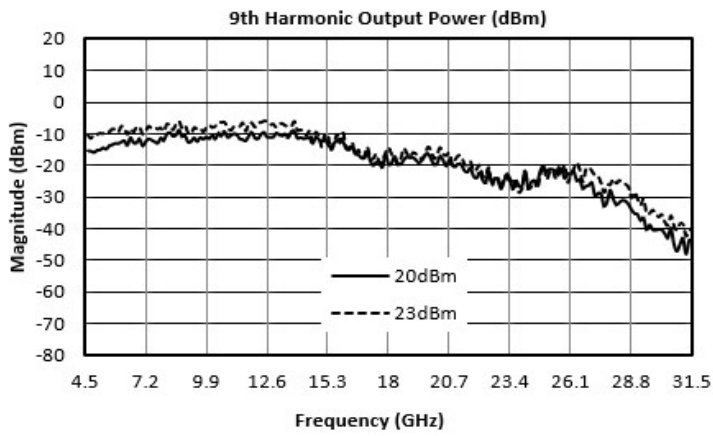

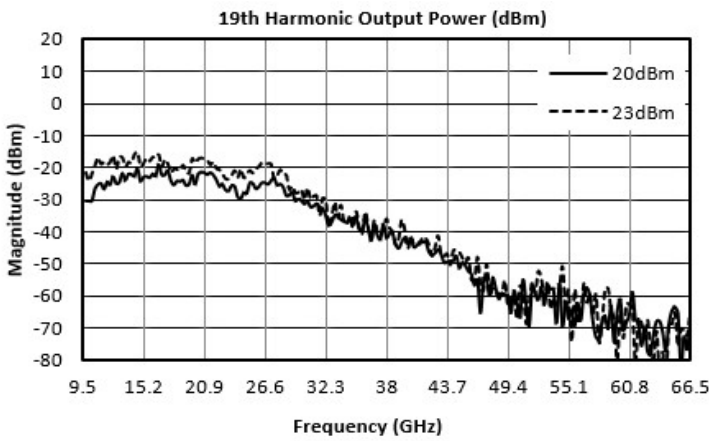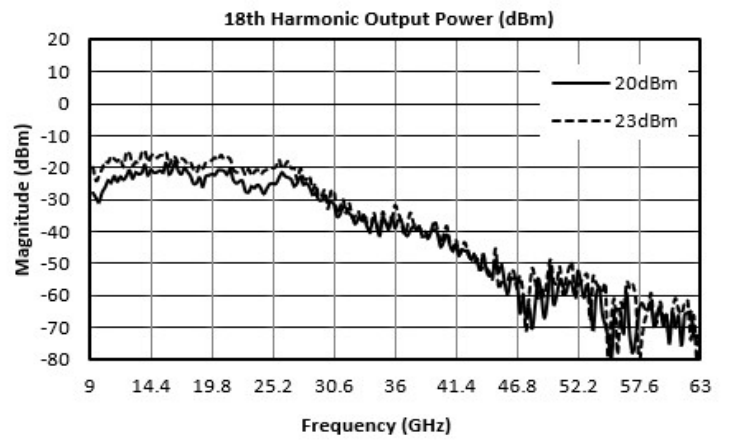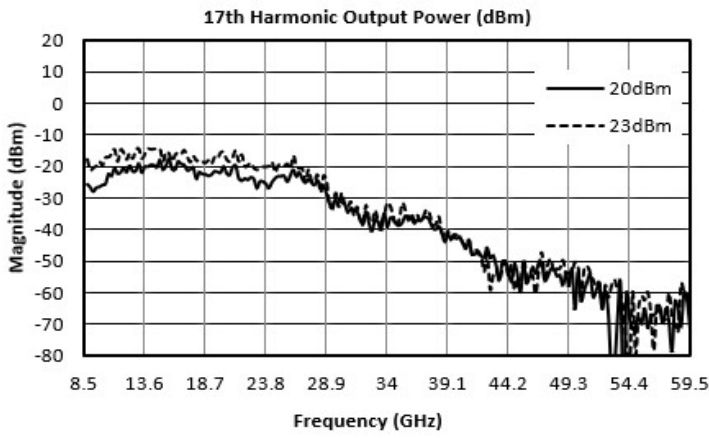




Typical Performance Plots: Harmonic Output Power w/ Square Wave from APM-7098PA

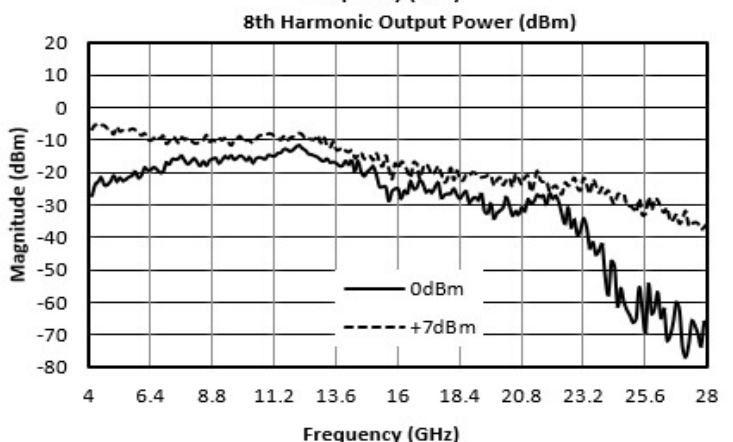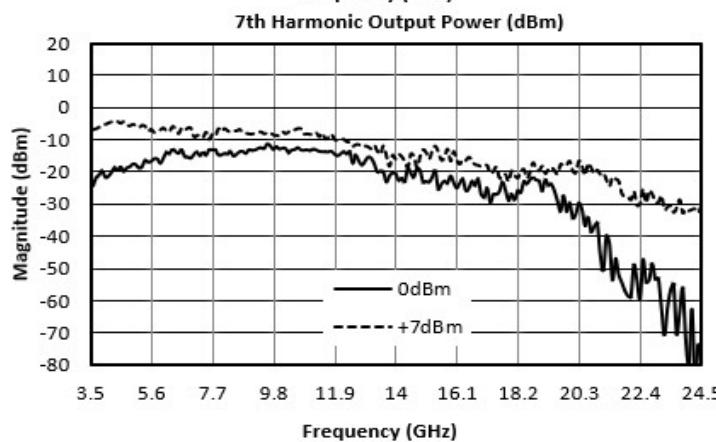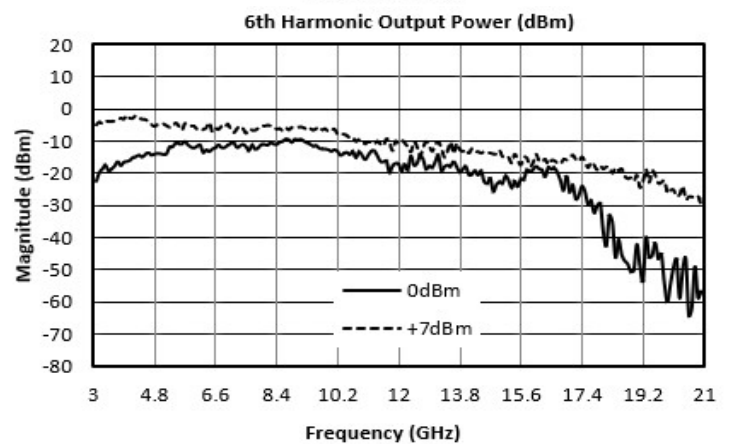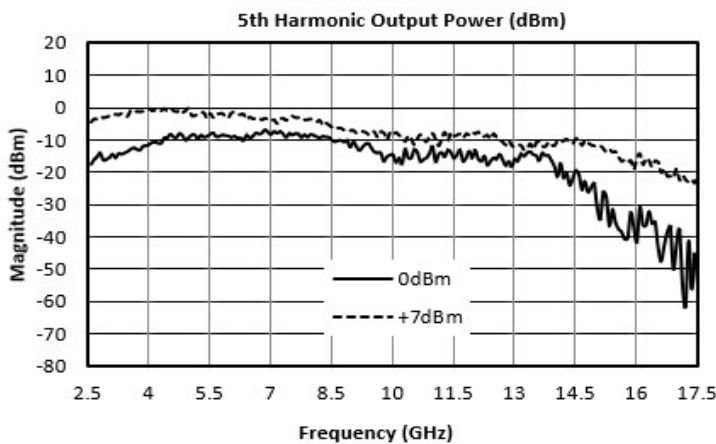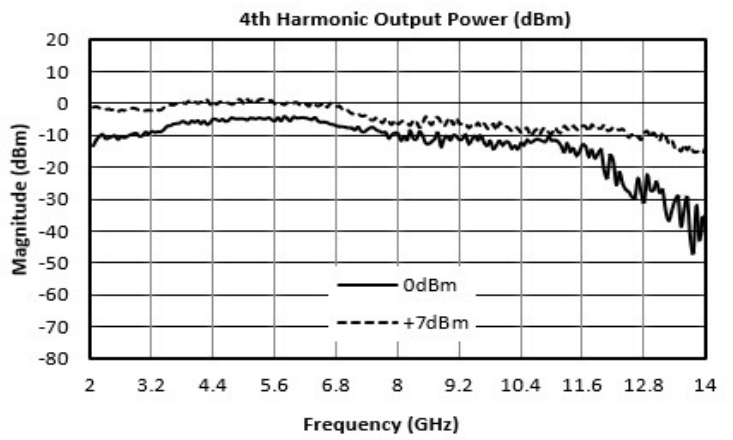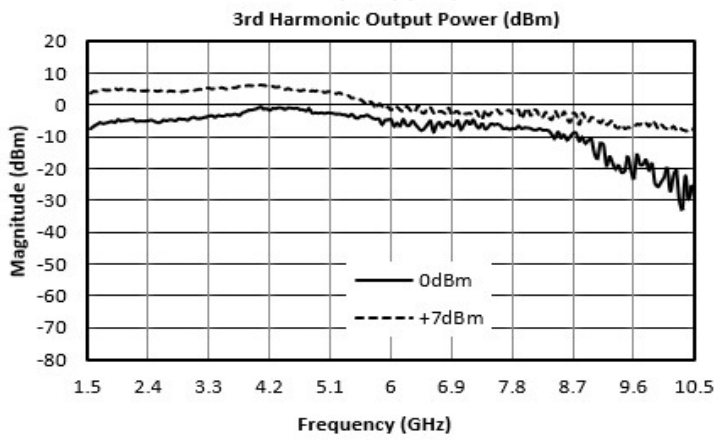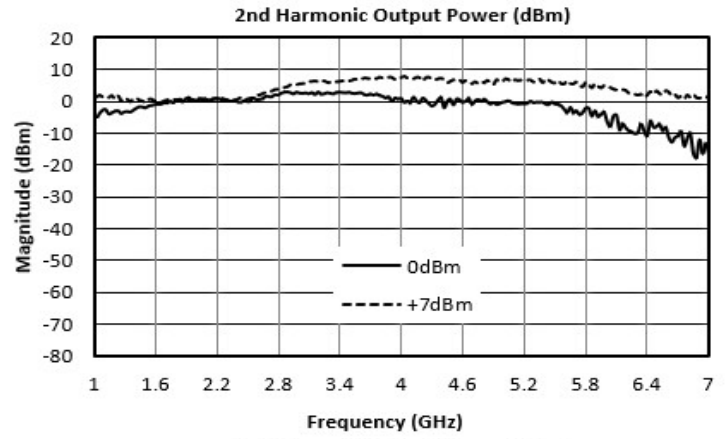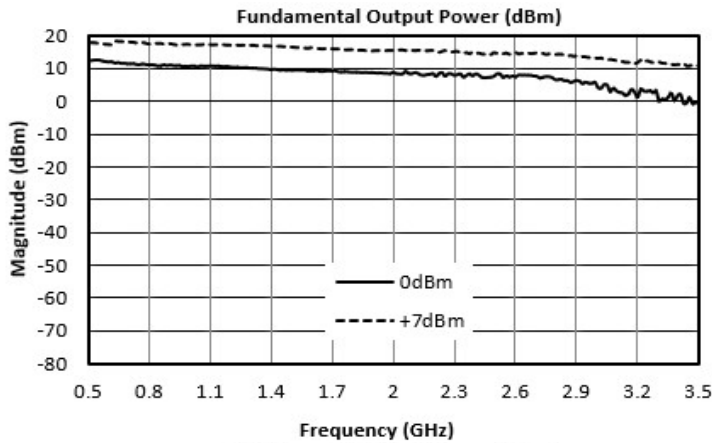

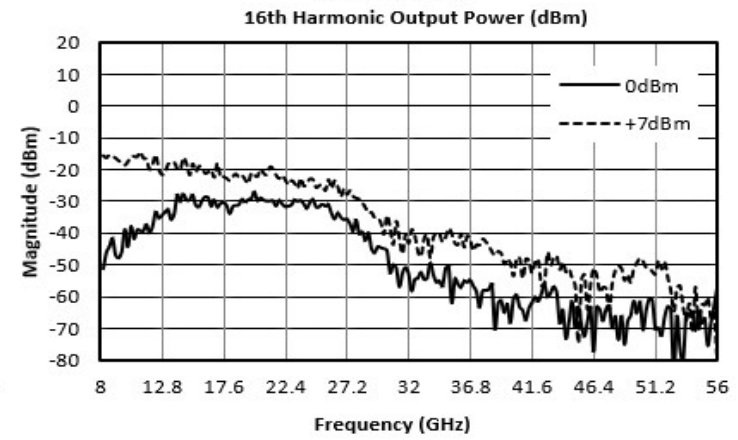
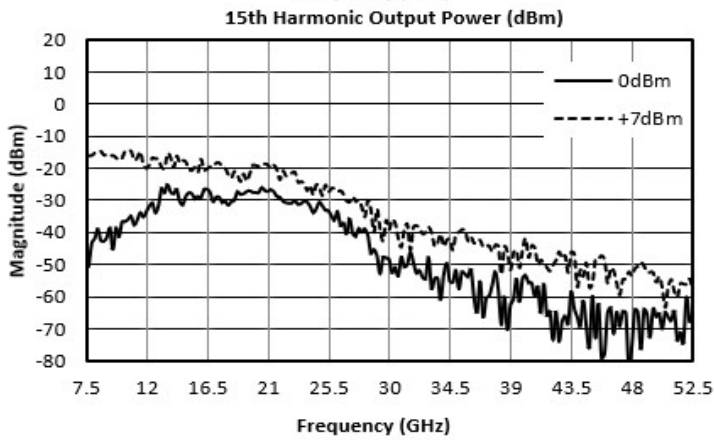
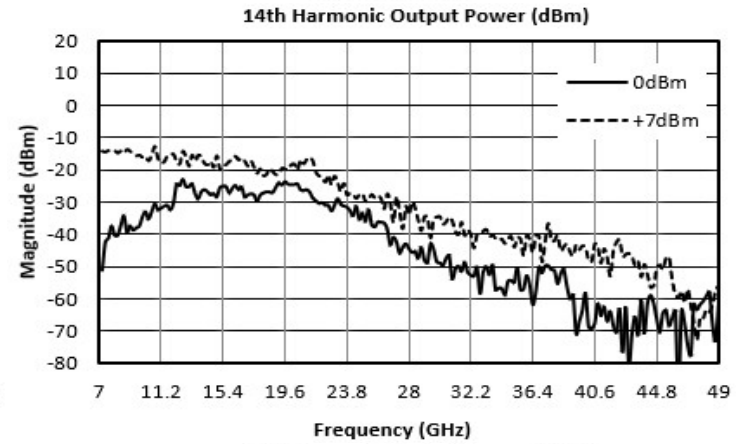
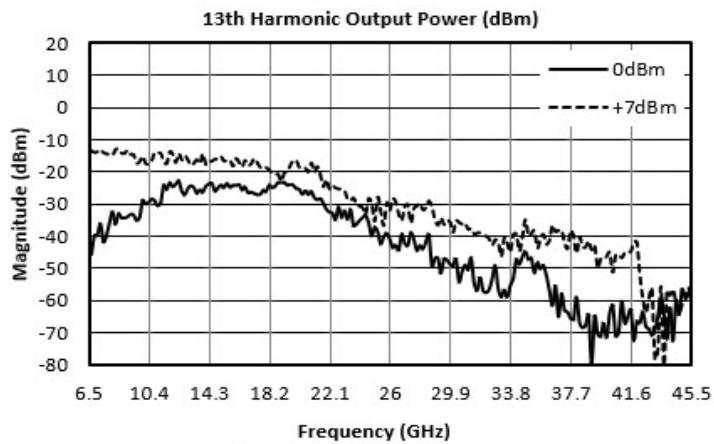
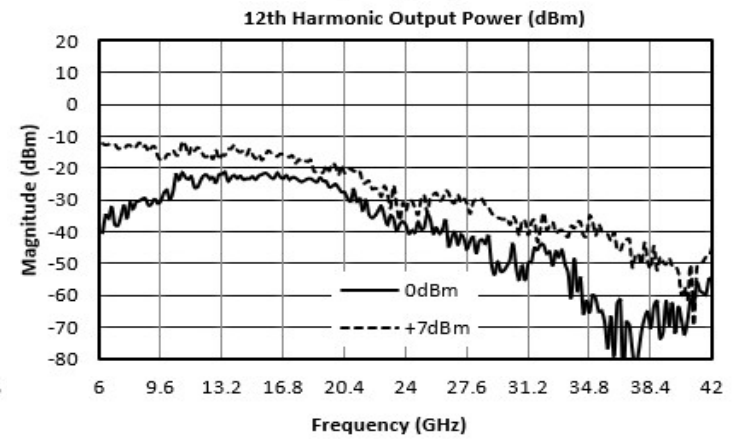
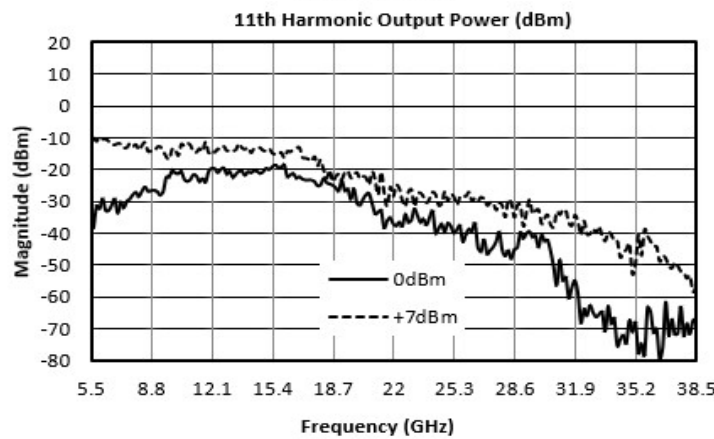
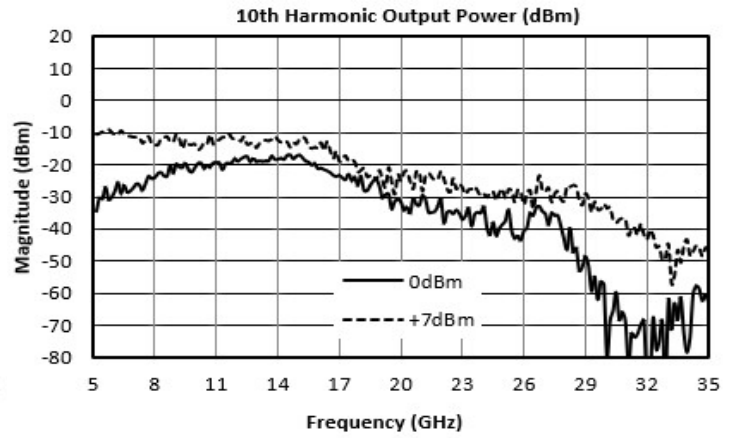
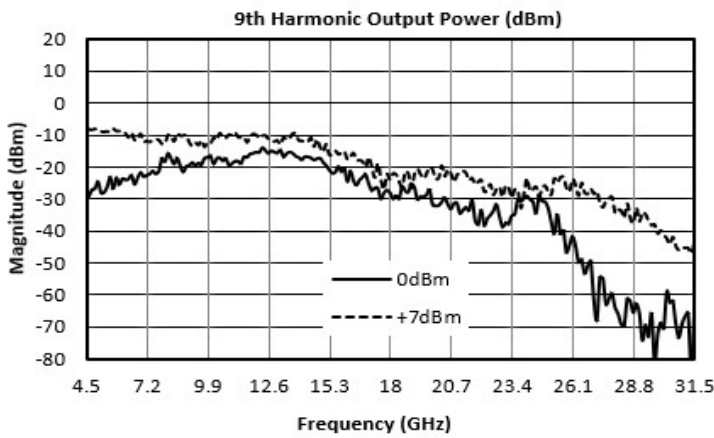


NLTL-6796SM

GaAs MMIC Non-Linear Transmission Line






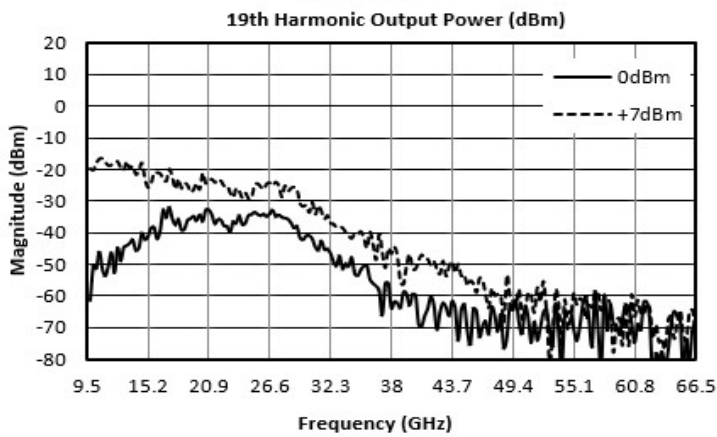
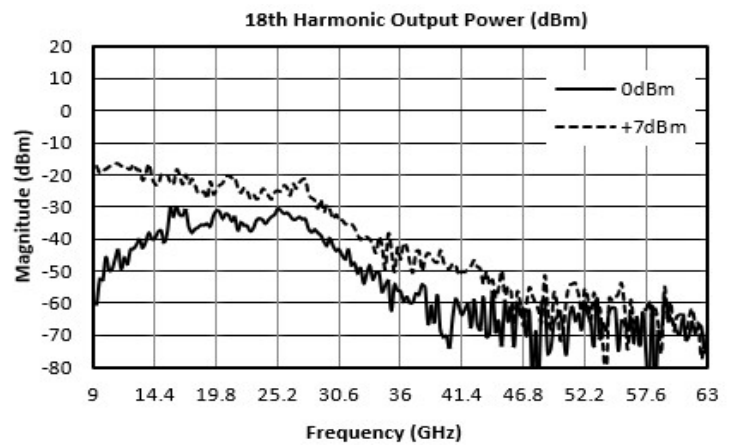
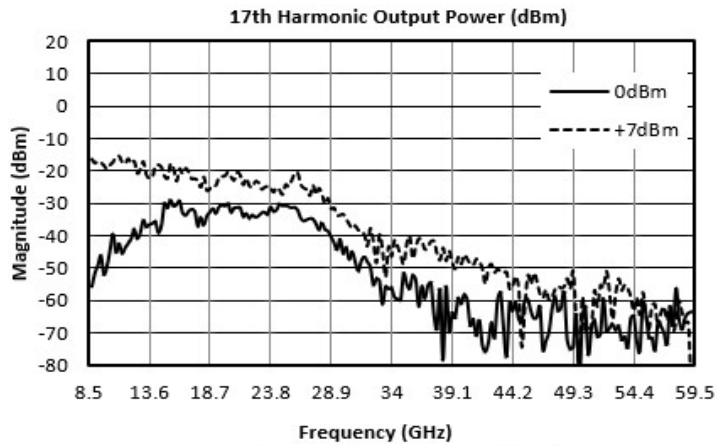


Typical Performance Plots: Harmonic Output Power w/ Square Wave from ADM1-0026PA

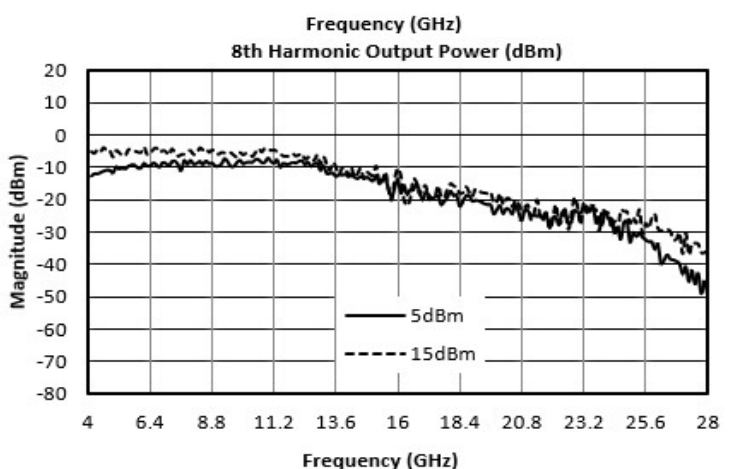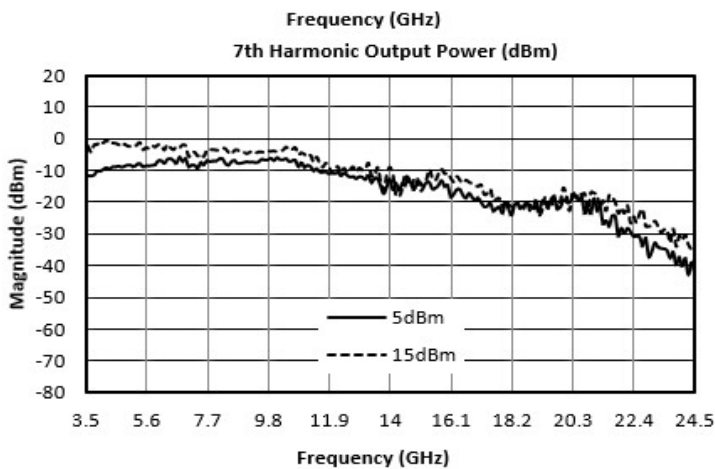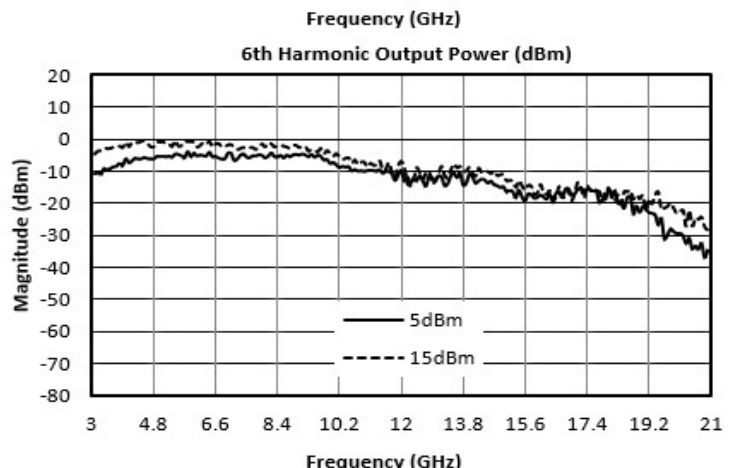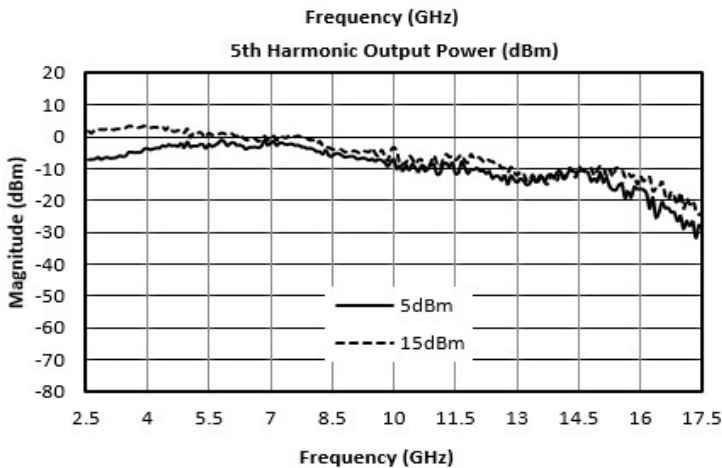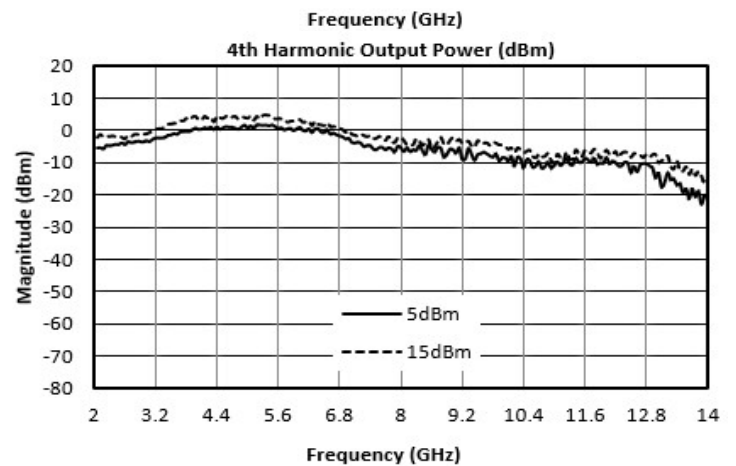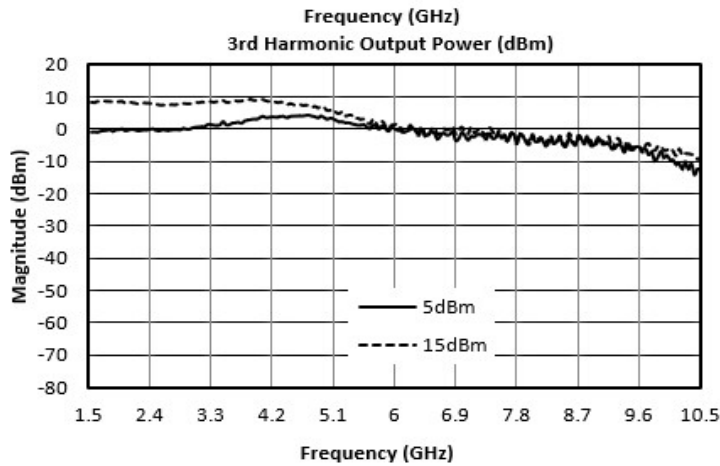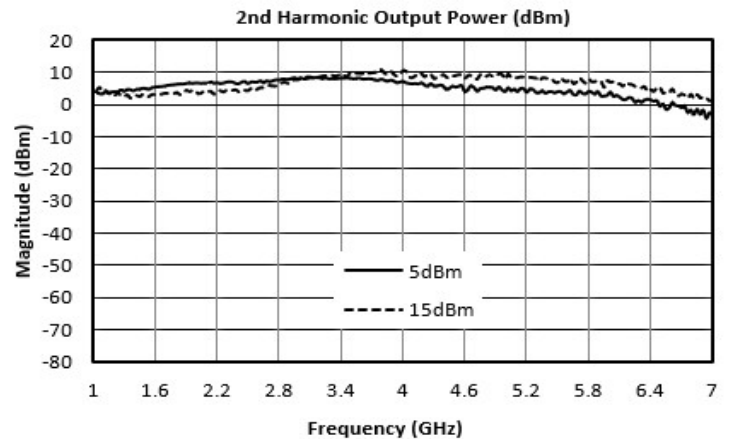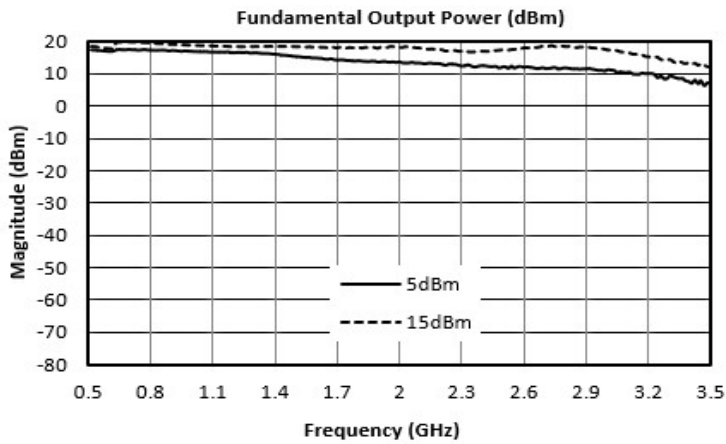




NLTL-6796SM

GaAs MMIC Non-Linear Transmission Line

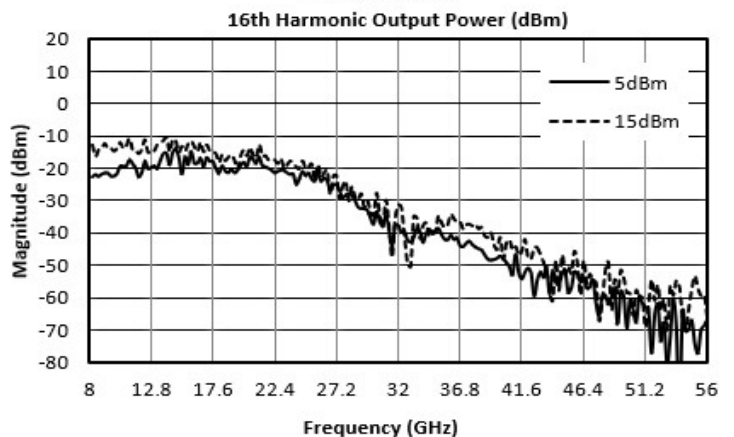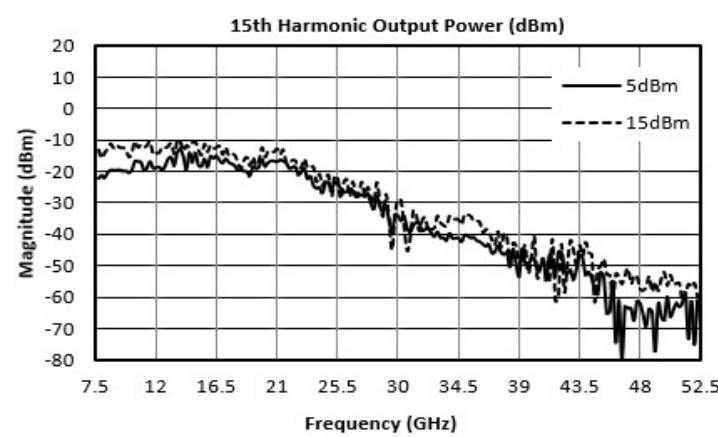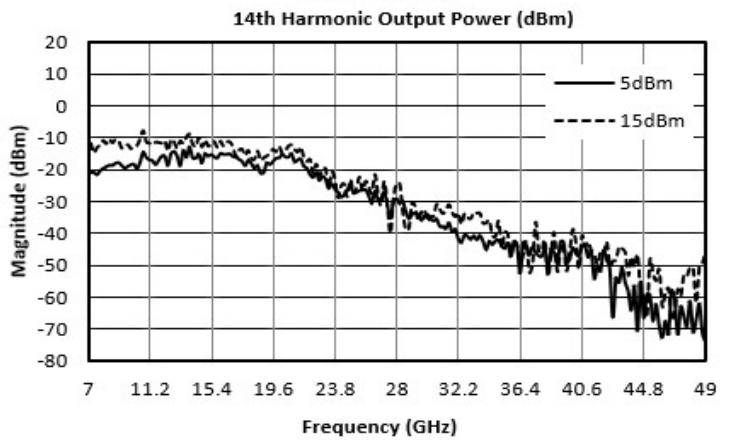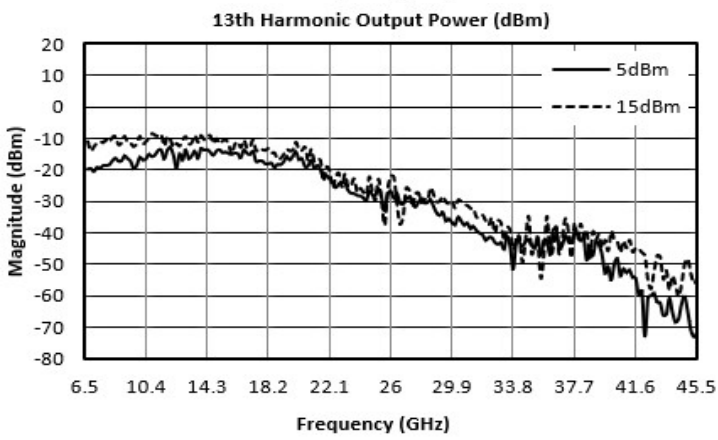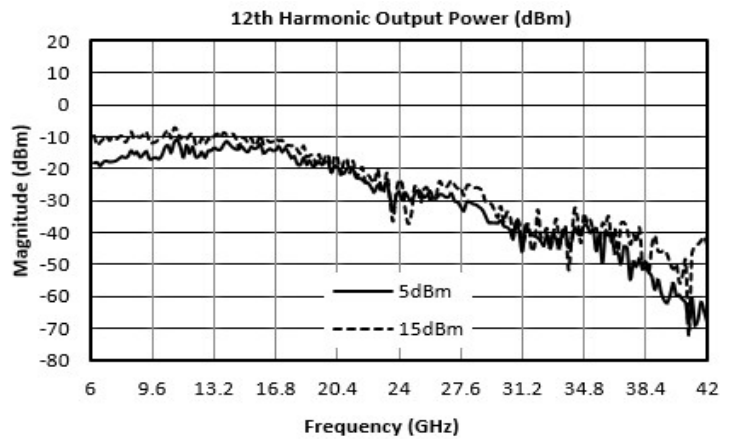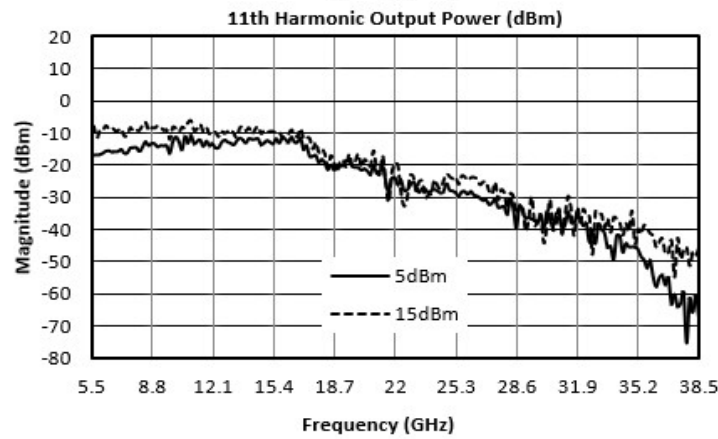
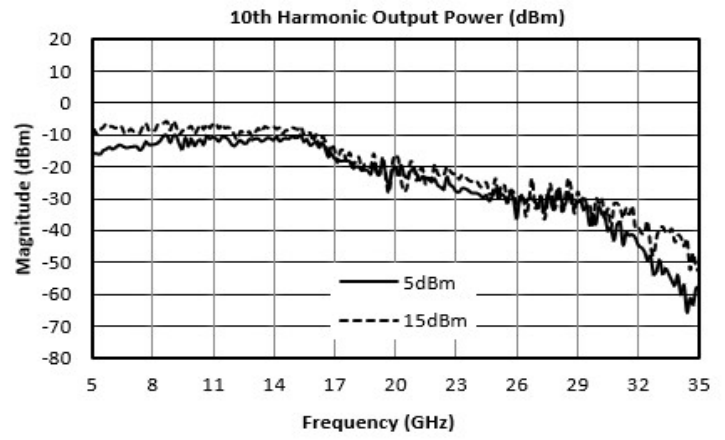
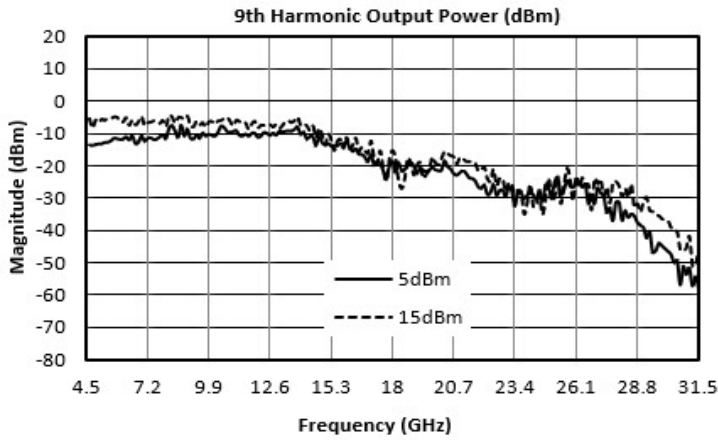


NLTL-6796SM




GaAs MMIC Non-Linear Transmission Line

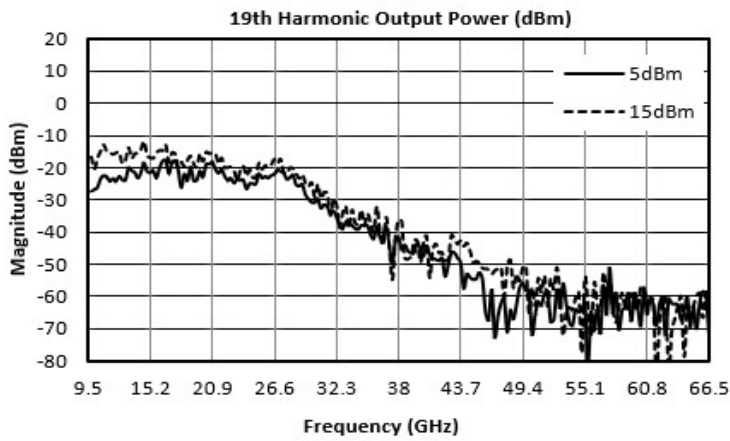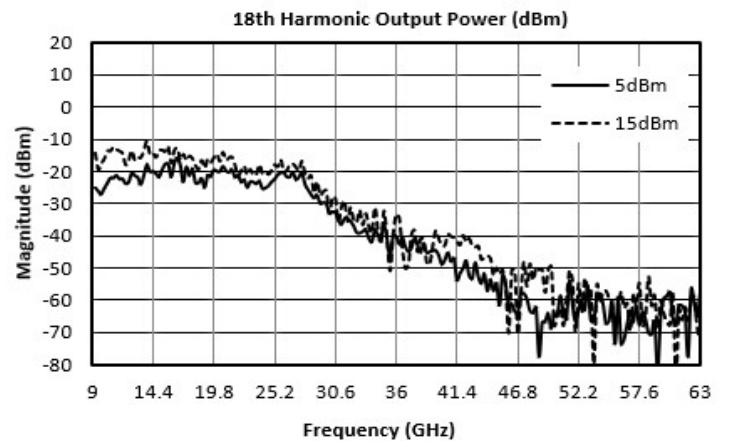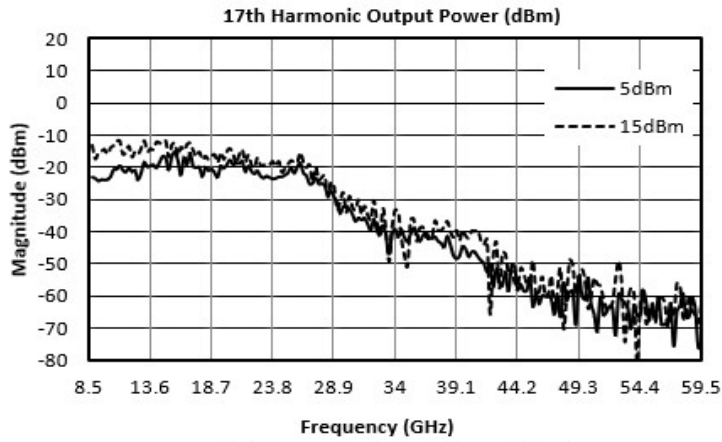




Typical Performance Plots: 5th Harmonic Output Power vs Bias Resistor

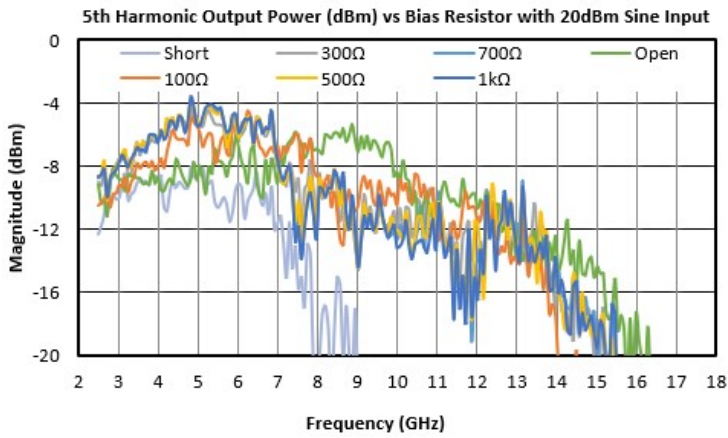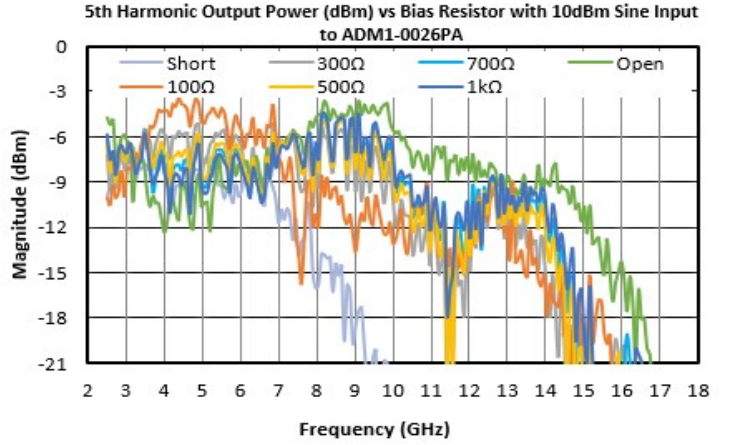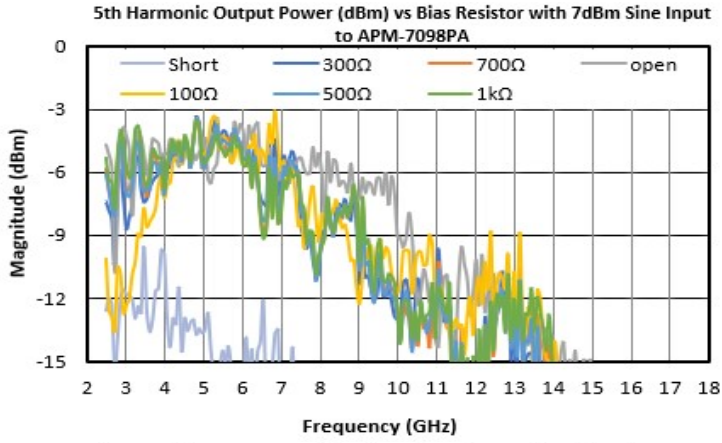



Typical Performance Plots: 10th Harmonic Output Power vs Input Power

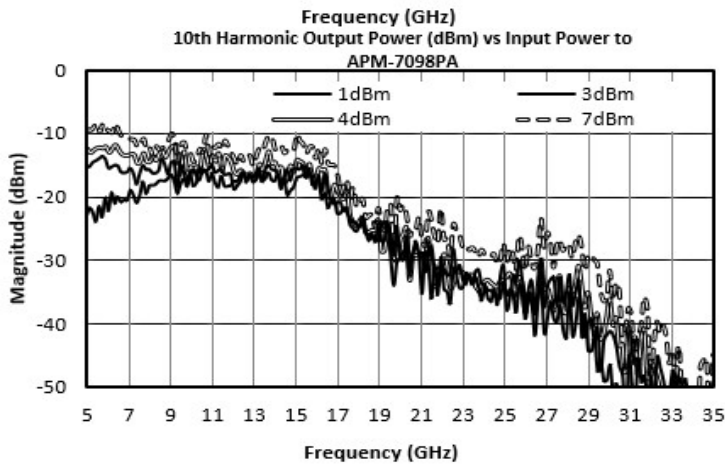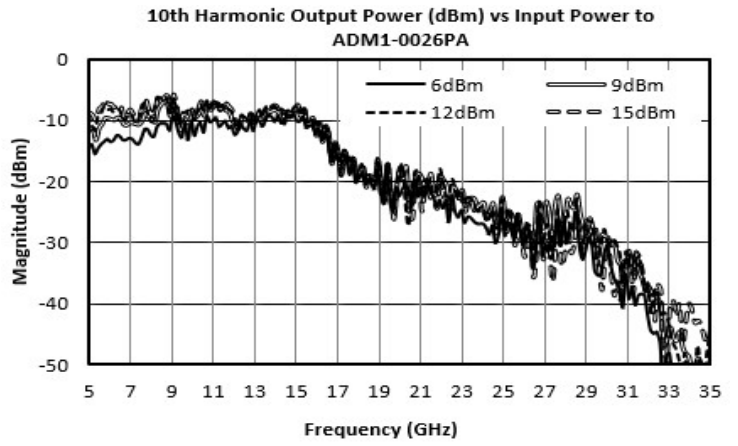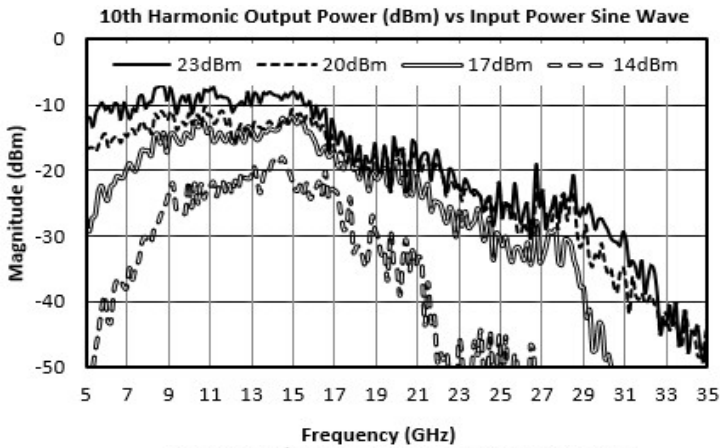


Typical Performance Plots: Conversion Loss and Output Power vs Input Power





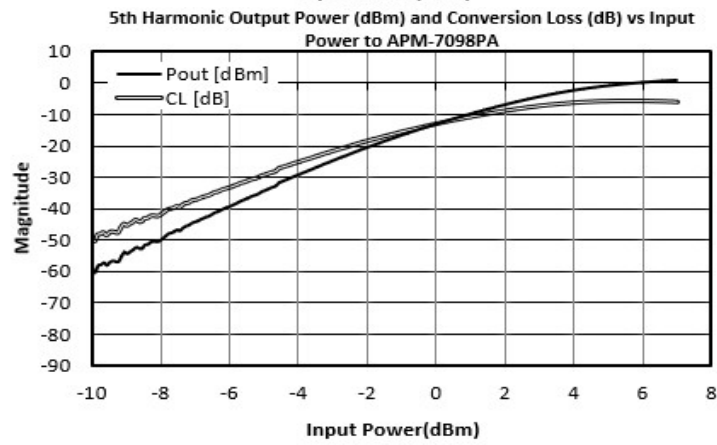
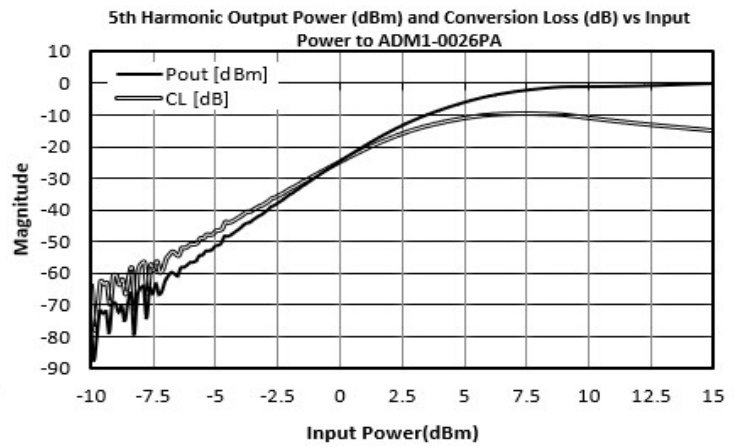
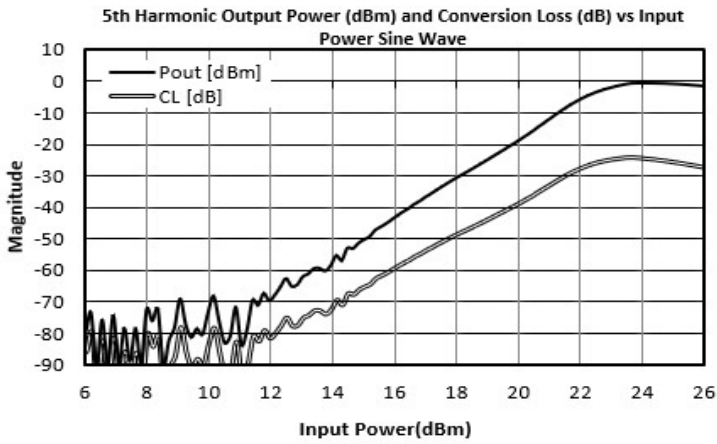


Typical Performance Plots: Harmonic Magnitude vs Bias Resistor

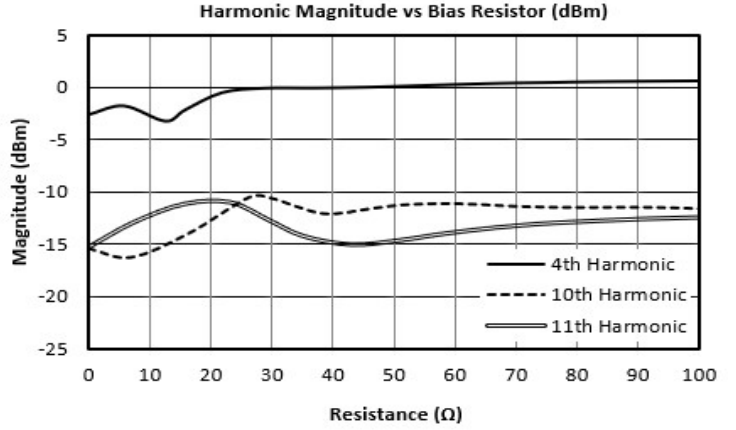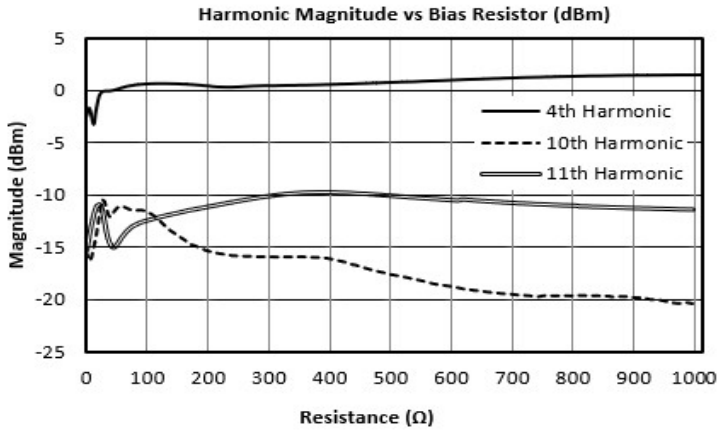


Typical Performance Plots: Time and Frequency Domain Plots

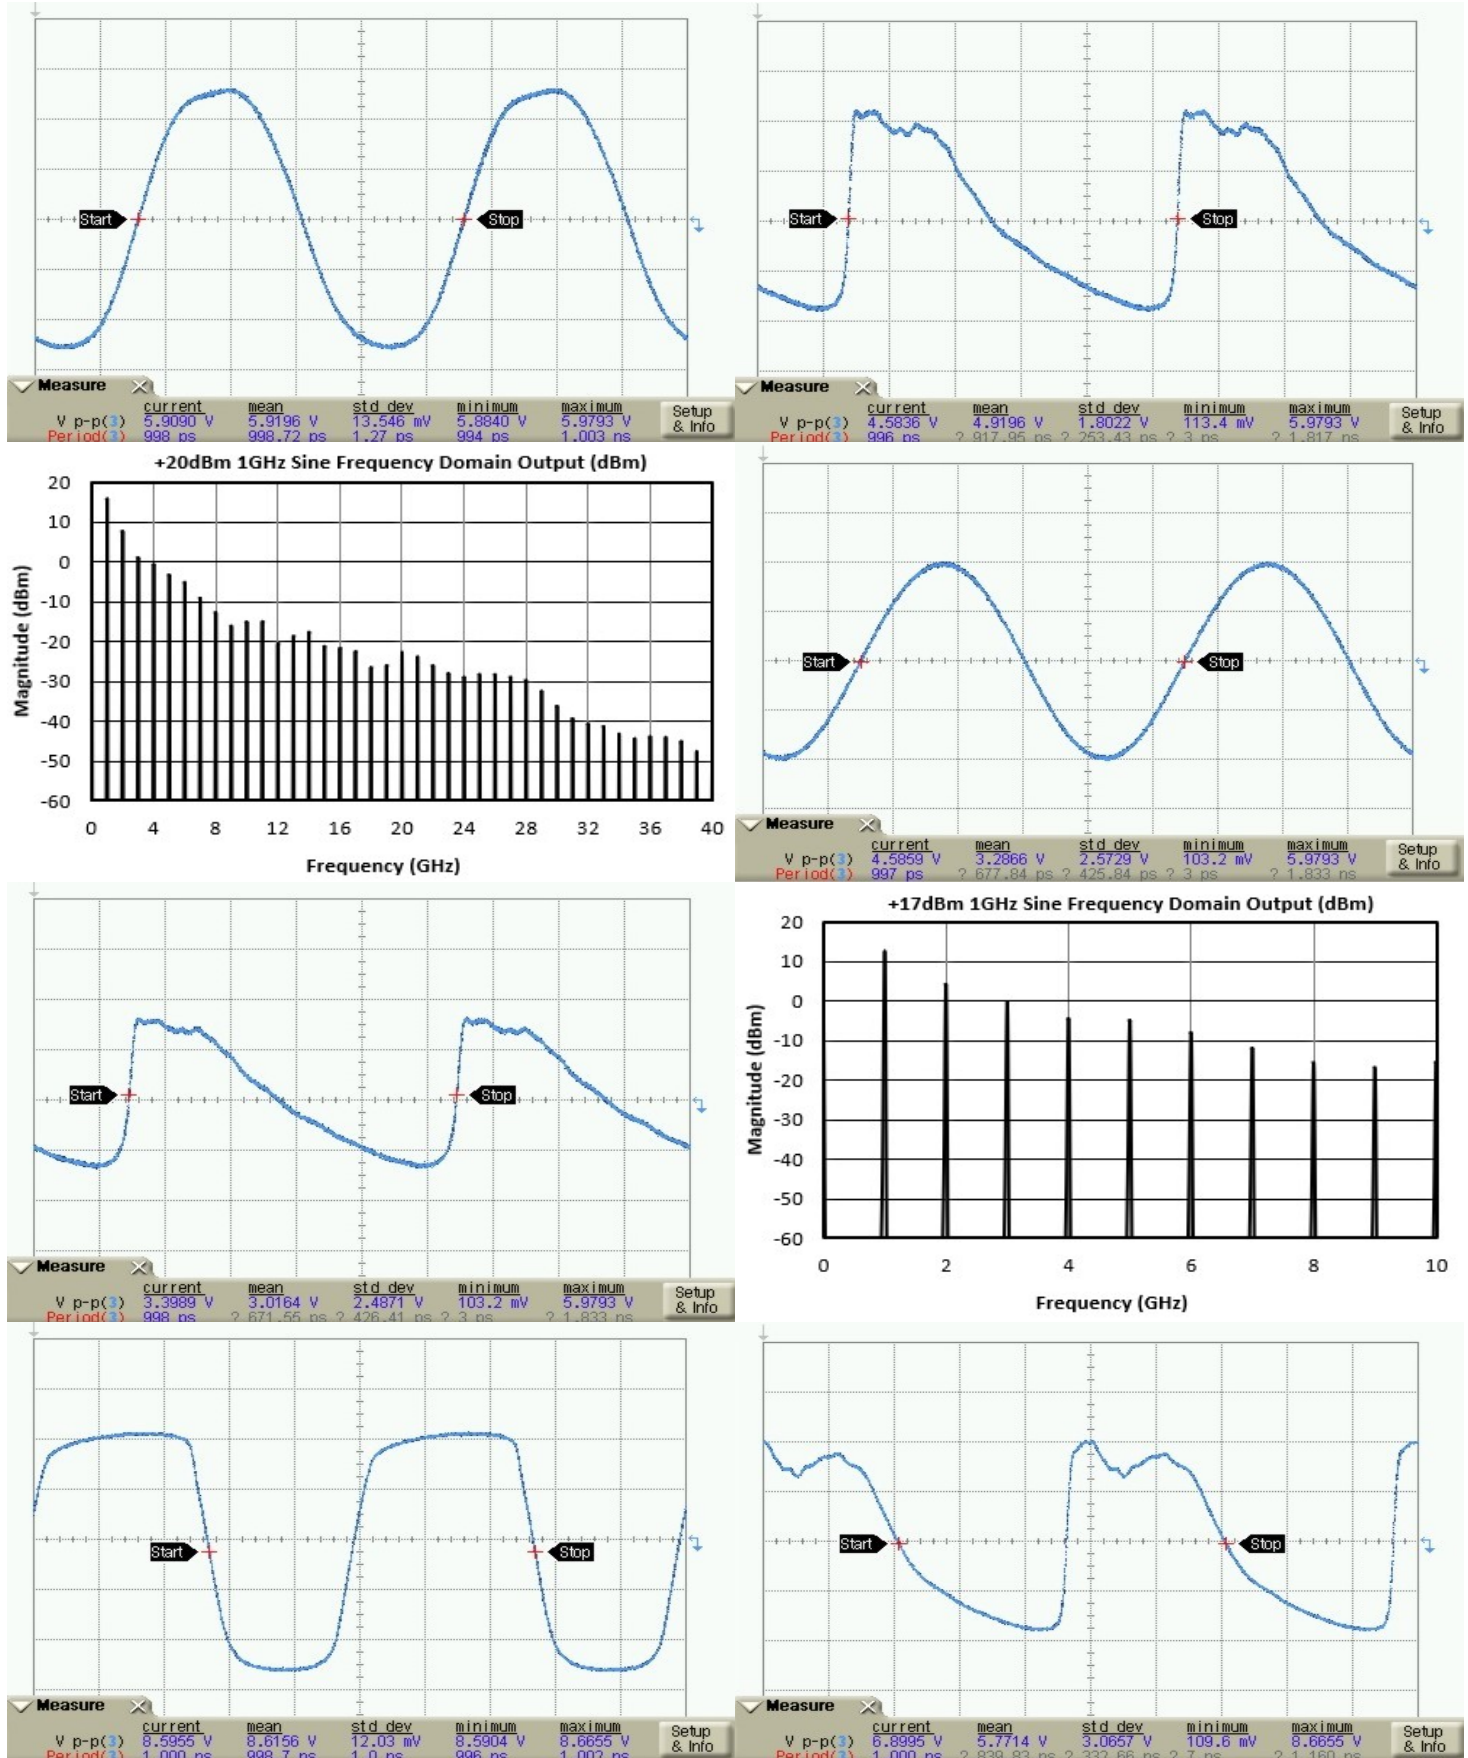

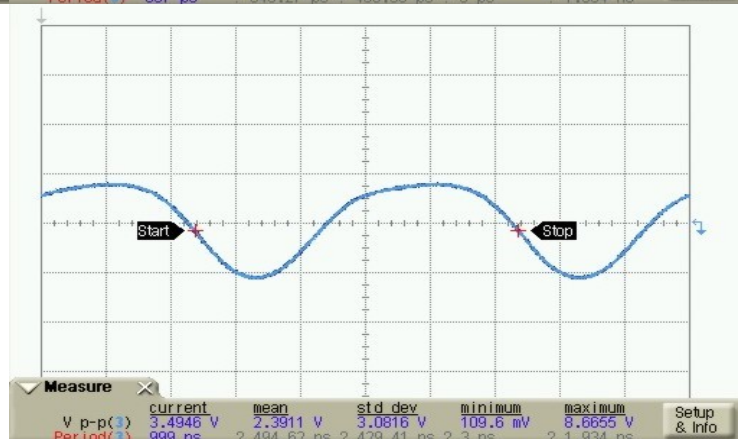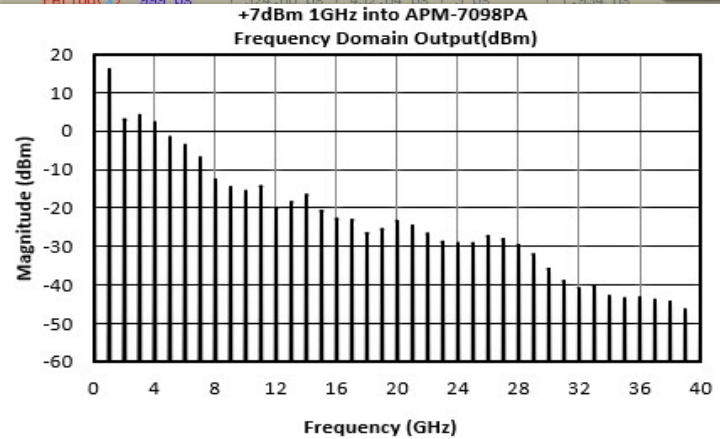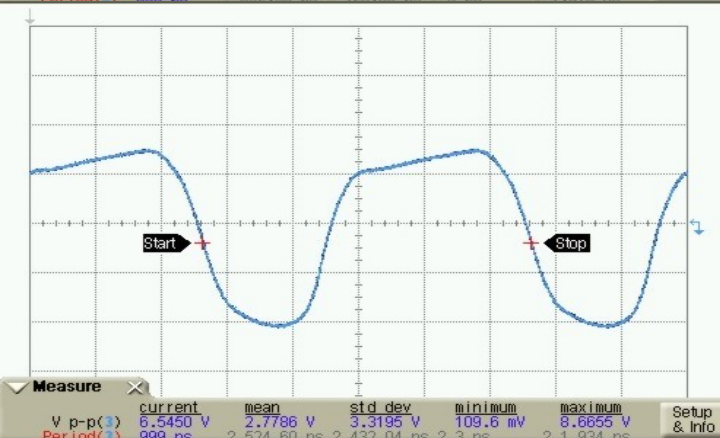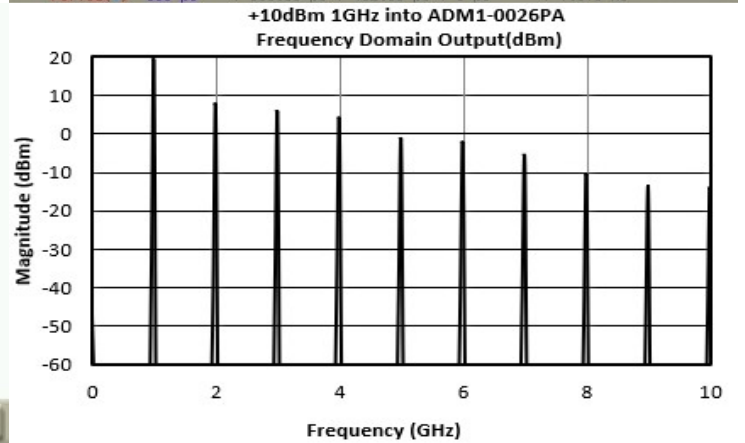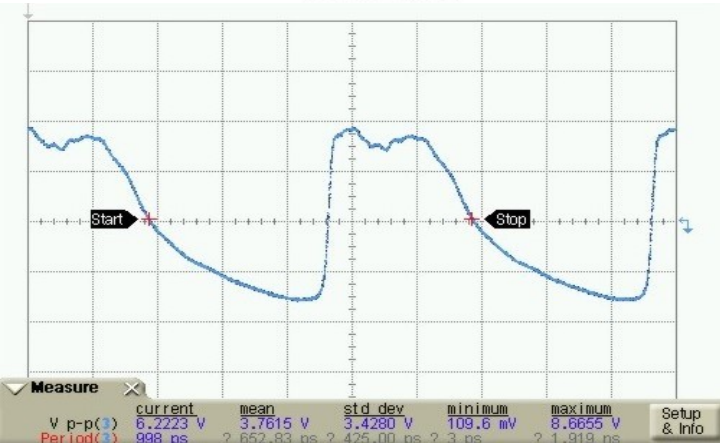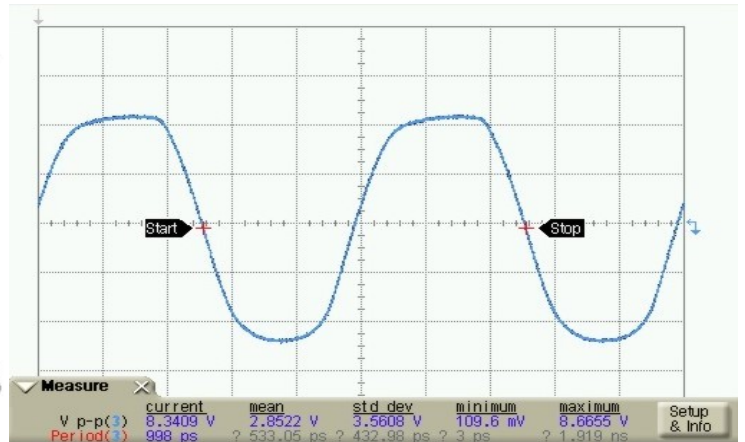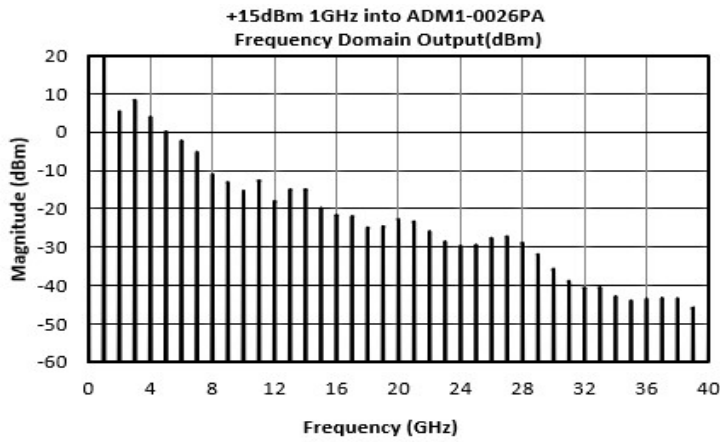


NLTL-6796SM

GaAs MMIC Non-Linear Transmission Line

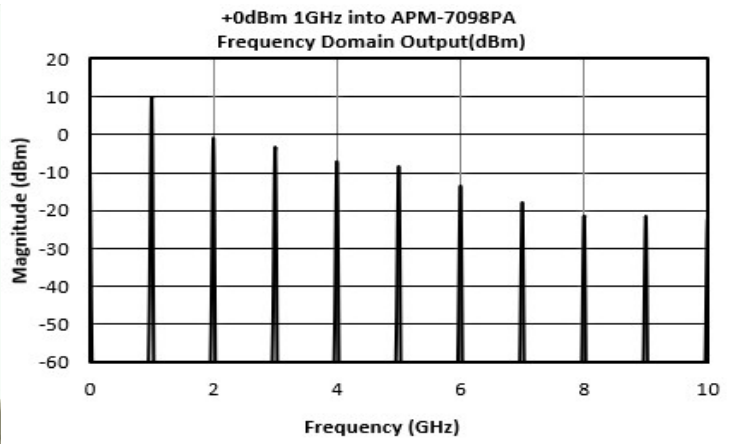

Application Information

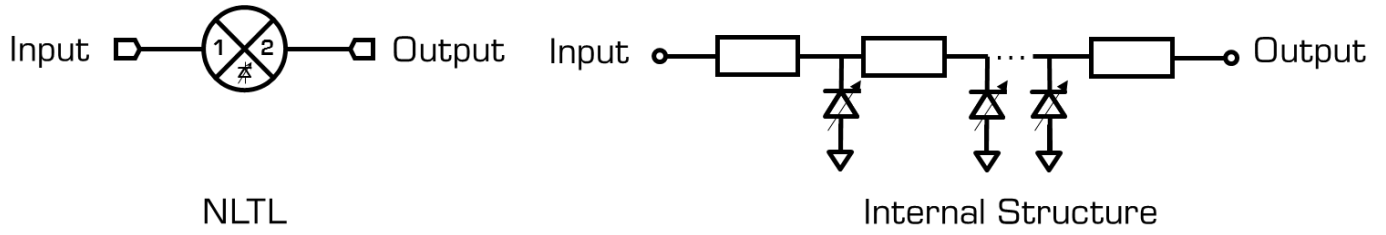

Detailed Description

The NLTL-6796SM belongs to Marki Microwave's NLTL family of multipliers and non-linear transmission lines. The NLTL product line consists of passive GaAs MMIC non-linear transmission lines designed and fabricated with GaAs Schottky diode-based varactors. NLTLs create an impulse train of harmonics of the fundamental input frequency. The NLTL is capable of generating outputs up to and beyond 40 GHz. The NLTL-6796SM is a 6 mm QFN and the EVAL-NLTL-6796 is a connectorized module with the QFN reflowed onto a PCB.


Port 1 supports up to 3.5GHz input signals. Port 2 outputs integer multiples of the input signal (i.e., x2, x3, x4, etc.) up to a maximum of ~50 GHz given a -60dBm threshold and +20dBm input power. Higher harmonics are generated but at a lower efficiency.

The operating conditions of the NLTL are extremely important to optimize performance. High power inputs will increase the output power observed; however, the conversion efficiency will decrease. This is increasingly true for higher input frequencies and at input powers above the recommended limit. Optimal conversion efficiency of the NLTL is achieved using a square wave input with a fast rise time. Doing so causes a degradation in the 2nd output harmonic but otherwise improves the conversion efficiency at all other harmonics. It is for this reason that the typical performance plots are shown driven with a sine wave input as well as with two amplifiers, the ADM1-0026PA, a square wave driver amp, and the APM-7098PA, a low phase noise amplifier. Typical Performance Plots: Harmonic Magnitude vs Bias Resistor shows the results of these driver amplifiers in time and frequency domain.

NLTL-6796SM requires no external DC bias. The self-bias of the diodes caused by the rectified RF input signal is sufficient for operation. For the best performance, optimization of the DC return path through a bias resistor is recommended for each specific application to optimize the harmonic output power distribution.

The phase noise of a non-linear transmission line is outstanding. If verification of performance is necessary, the application circuit used and input conditions are extremely important. NLTLs are AM sensitive. If there is excessive AM noise on the input of the NLTL, observing the output of the NLTL will show excessive PM/phase noise because of the high AM to PM conversion property of NLTLs.


Application Circuit Description

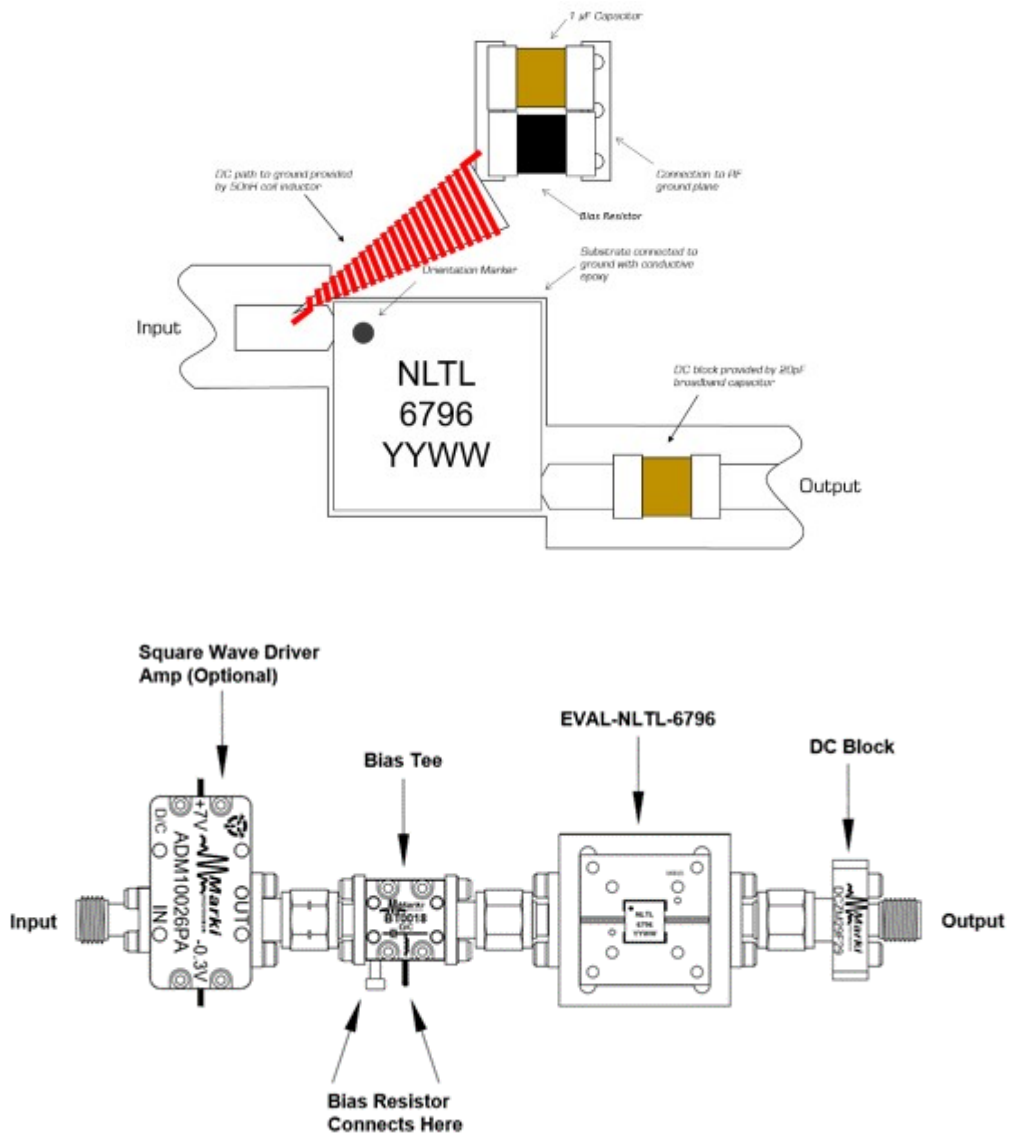

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

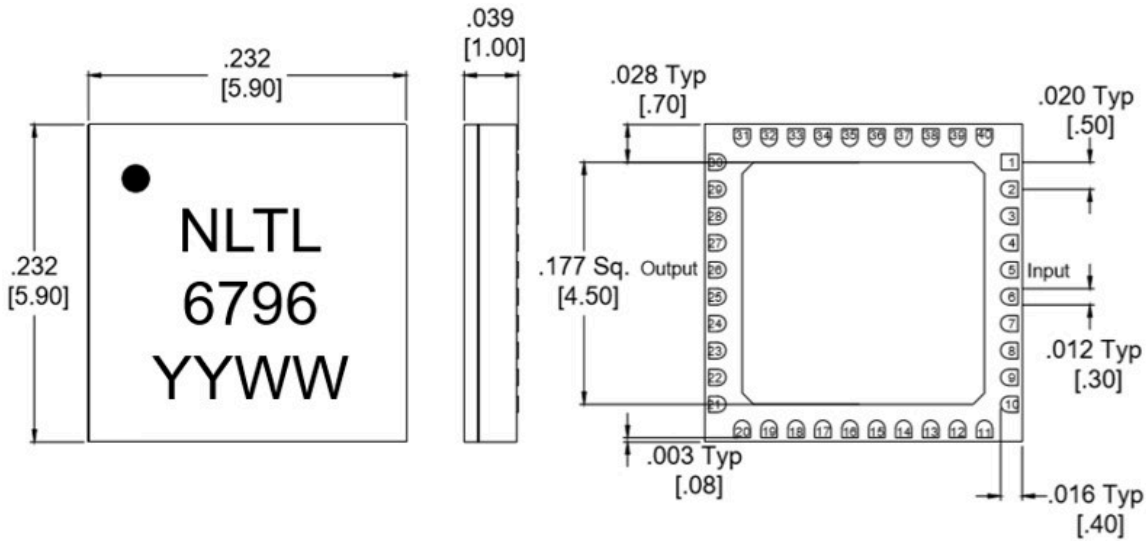

Pad #	Function
1	N/C
2	N/C
3	N/C
4	N/C
5	Input
6	N/C
7	N/C
8	N/C
9	N/C
10	N/C
11	N/C
12	N/C
13	N/C
14	N/C
15	N/C
16	N/C
17	N/C
18	N/C
19	N/C
20	N/C
21	N/C
22	N/C
23	N/C
24	N/C
25	N/C
26	Output
27	N/C
28	N/C
29	N/C
30	N/C
31	N/C
32	N/C
33	N/C
34	N/C
35	N/C
36	N/C
37	N/C
38	N/C
39	N/C
40	N/C

Finish: ENEPIG		
Ni	8.89µm MAX	1.27µm MIN
Pd	0.17µm MAX	0.07µm MIN
Au	0.254µm MAX	0.03µm MIN


Table A

Notes (unless otherwise specified):


1. Substrate material is Ceramic
2. All unconnected pins should be connected to PCB/RF ground

Footprint Image


Download : [Footprint Drawing](#)

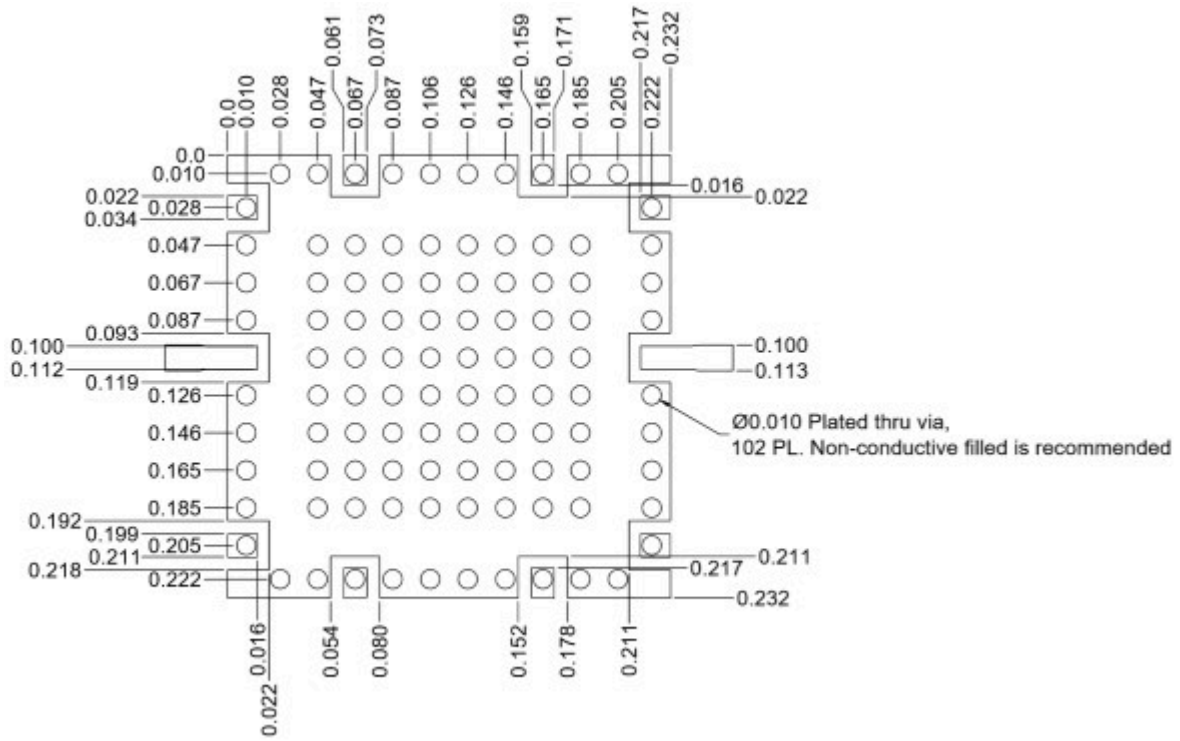

Evaluation Board - Outline Drawing

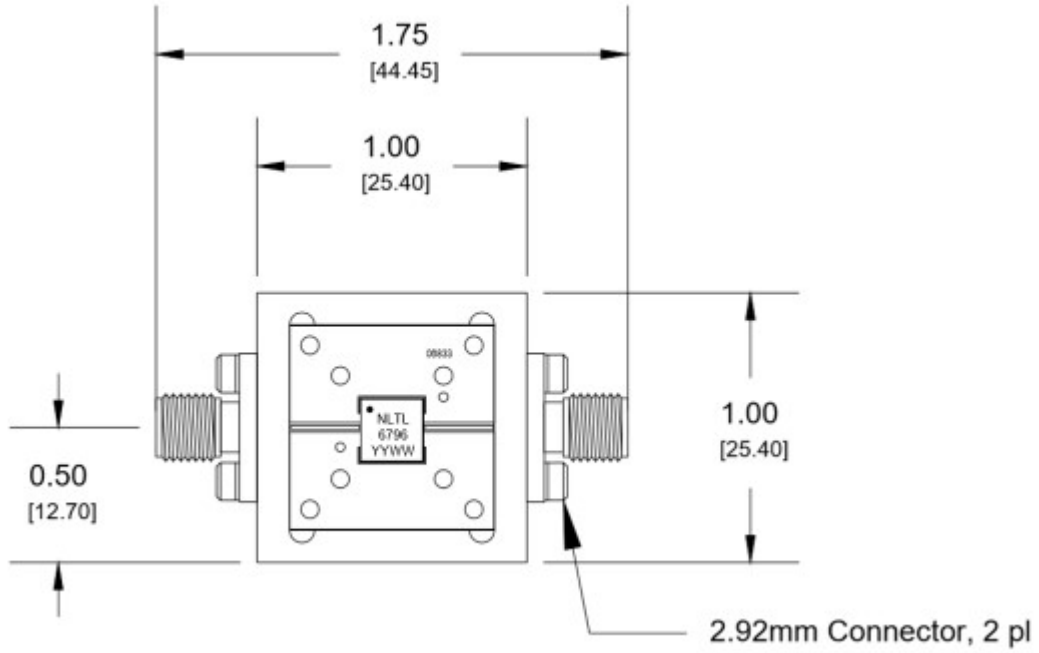

Evaluation Board - Application Circuit

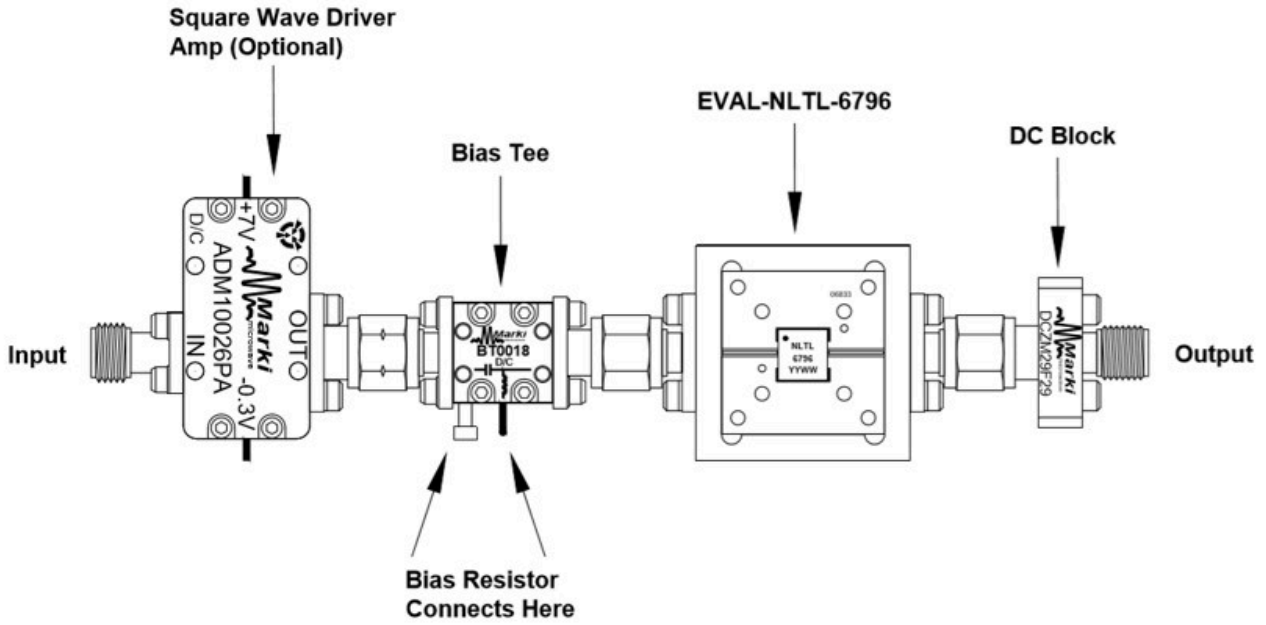

DISCLAIMER

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2020, 2022, Marki Microwave, LLC