


# MMIQ-1867HSM-2

## Low LO Drive Surface Mount MMIC IQ Mixer

### DEVICE OVERVIEW

#### General Description

The MMIQ-1867HSM is a low LO drive, passive GaAs MMIC IQ mixer. This is an ultra-broadband mixer spanning 18 to 67 GHz on the RF and LO ports with an IF from DC to 23 GHz. Up to 35 dB of image rejection is available due to the excellent phase and amplitude balance of its on-chip LO quadrature hybrid. Both surface QFNs and evaluation boards are available.




#### Features

N/A

#### Applications

- Single Sideband and Image Rejection Mixing
- IQ Modulation / Demodulation
- Vector Amplitude Modulation
- Band Shifting
- 5G Band Support

#### Functional Block Diagram



#### Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
MMIQ-1867HSM-2	Low LO Drive Surface Mount MMIC IQ Mixer	QFN	-	REACH RoHS	Released	EAR99
EVAL-MMIQ-1867H	Low LO Drive Surface Mount MMIC 18-67 GHz IQ Mixer	EVAL	-	REACH RoHS	Released	EAR99
MMIQ-1867H-2-TR	Tape and Reel, Low LO Drive Surface Mount MMIC IQ Mixer	QFN	7"	REACH RoHS	Released	EAR99

### Table Of Contents

- **Device Overview**
  - General Description
  - Features
  - Applications
  - Functional Block Diagram
- **Port Configuration and Functions**
  - Port Diagram
  - Port Functions
- **Revision History**
- **Specifications**
  - Absolute Maximum Ratings
  - Package Information
  - Recommended Operating Conditions
  - Sequencing Requirements
  - Electrical Specifications
  - Typical Performance Plots
  - Typical Performance Plots: 6 GHz IF Downconversion Loss w/ AMM-7210SM LO Driver
  - Typical Performance Plots: IP3
  - Typical Performance Plots: LO Harmonic Isolation
  - Typical Performance Plots: Vector Modulator
  - Spur Tables
- **Operation**
  - Application Circuit
  - Application Circuit Description
- **Mechanical Data**
  - Outline Drawing
- **Footprint Image**
- **Evaluation Board**
  - Evaluation Board Outline Drawing


### Revision History

Revision Code	Revision Date	Comment
-	2021-04-01	Datasheet Initial Release
A	2023-02-01	Added frequency bands to electrical specifications table. Added 22 GHz IF plot. Updated EVAL part number.






## Port Configuration and Functions

### Port Diagram

A bottom-up view of the MMIQ-1867HSM's SMT package outline drawing is shown below. The mixer may be operated as either a downconverter or an upconverter. Use of the RF or IF as the input or output port will depend on the application. See Application Information for input and output port configuration for common applications.

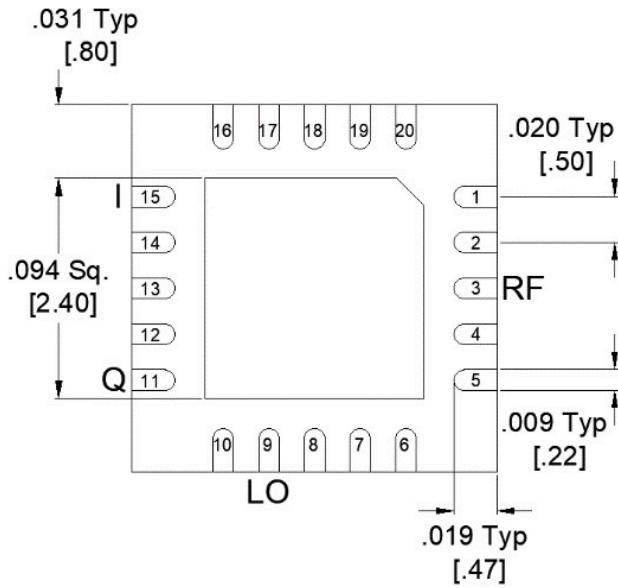

### Port Functions

Port	Function	Description	DC Equivalent Circuit
GND	Ground	SM package ground path is provided through the ground paddle.	<b>GND</b> 
Pin 11	Q Input / Output	Port 11 is diode coupled and AC matched to 50Ω over the specified Q port frequency range.	<b>P11</b> 
Pin 15	I Input / Output	Port 15 is diode coupled and AC matched to 50Ω over the specified I port frequency range.	<b>P15</b> 
Pin 3	RF Input / Output	Port 3 is DC open and AC matched to 50Ω over the specified RF frequency range.	<b>P3</b> 
Pin 9	LO Input	Port 9 is DC open and AC matched to 50Ω over the specified LO frequency range.	<b>P9</b> 

## Specifications

### Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Pin 11 DC Current	30	mA
Pin 15 DC Current	30	mA
Power Handling, at any Port	26	dBm

### Package Information

Parameter	Details	Rating
Dimensions	-	4 x 4 mm
Moisture Sensitivity Level	-	MSL 1

### Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Ambient Temperature	-55	25	100	°C
RF/IF Input Power	-	-	9	dBm
LO Input Power	17	18	21	dBm

### Sequencing Requirements

There is no requirement to apply power to the ports in a specific order. However, it is recommended to provide a 50Ω termination to each port before applying power. This is a passive diode mixer that requires no DC bias.

## Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for a down conversion application with a +18 dBm sine wave LO input. Min and Max limits apply only to our connectorized units and are guaranteed at TA=+25°C. All bare die are 100% DC tested and visually inspected.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Amplitude Balance	RF/LO = 18 - 60 GHz I+Q = DC - 0.2 GHz	18	60	-	0.5	-	dB
Conversion Loss <sup>1</sup>	RF/LO = 18 - 60 GHz I+Q = DC - 0.2 GHz	18	60	-	9	18	dB
Conversion Loss <sup>2</sup>	RF/LO = 18 - 67 GHz I+Q = 0.2 - 23 GHz	18	67	-	13	24	dB
Conversion Loss <sup>3</sup>	RF/LO = 20 - 55 GHz I+Q = 0.2 - 23 GHz	20	55	-	11	-	dB
Conversion Loss <sup>4</sup>	RF/LO = 20 - 55 GHz I+Q = DC - 0.2 GHz	20	55	-	9	-	dB
IF Frequency Range	-	-	-	0	-	23	GHz
Image Rejection <sup>5</sup>	RF/LO = 18 - 60 GHz I+Q = DC - 0.2 GHz	18	60	-	29	-	dBc
Image Rejection <sup>6</sup>	RF/LO = 20 - 55 GHz I+Q = DC - 0.2 GHz	20	55	-	30	-	dBc
Input 1 dB Gain Compression Point (P1dB), I	-	-	-	-	11	-	dBm
Input 1 dB Gain Compression Point (P1dB), Q	-	-	-	-	9.5	-	dBm
Input IP3 <sup>7</sup>	RF/LO = 18 - 60 GHz I = DC - 0.2 GHz	18	60	-	22	-	dBm
Isolation, LO to I	IF/LO = 18 - 60 GHz	18	60	-	41	-	dB
Isolation, LO to Q	IF/LO = 18 - 60 GHz	18	60	-	27	-	dB
Isolation, RF to I	RF/IF = 18 - 60 GHz	18	60	-	51	-	dB
Isolation, RF to Q	RF/IF = 18 - 60 GHz	18	60	-	53	-	dB
LO Frequency Range	-	-	-	18	-	67	GHz
LO-RF Isolation	RF/LO = 18 - 60 GHz	18	60	-	44	-	dB
Noise Figure <sup>8</sup>	RF/LO = 18 - 60 GHz I+Q = DC - 0.2 GHz	18	60	-	9	-	dB
Phase Balance	RF/LO = 18 - 60 GHz I+Q = DC - 0.2 GHz	18	60	-	3	-	°
Q (Pin 11) Frequency Range	-	-	-	0	-	23	GHz
RF Frequency Range	-	-	-	18	-	67	GHz

[1][2][3][4] Measured as an I/Q down converter (i.e., I and Q powers are not combined)







[5][6] Image Rejection and Single sideband performance plots are defined by the upper sideband (USB) or lower sideband (LSB) with respect to the LO signal. Plots are defined by which sideband is selected by the external IF quadrature hybrid.

[7] Typical IIP3 is measured with I and Q ports combined with an external quadrature hybrid coupler in a down conversion.

[8] Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.









### Typical Performance Plots

I output means that the IF output signal is measured at the I port of the mixer and the Q port is loaded. Q output means the IF output signal is measured at the Q port of the mixer while the I port is loaded.

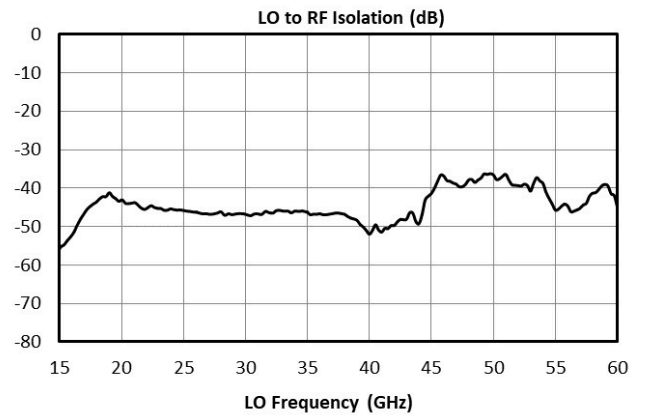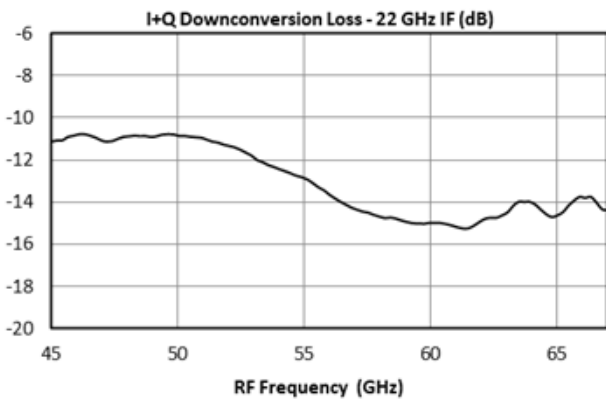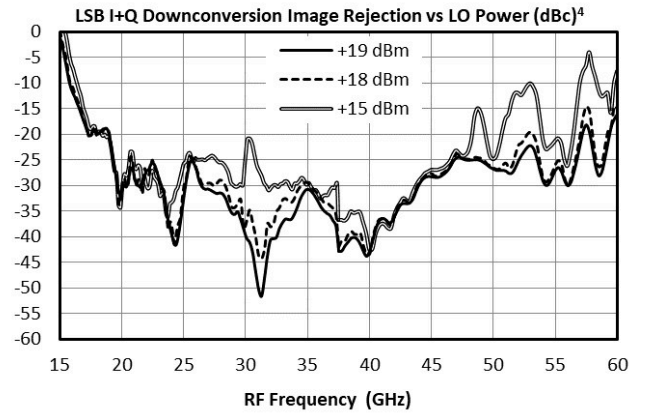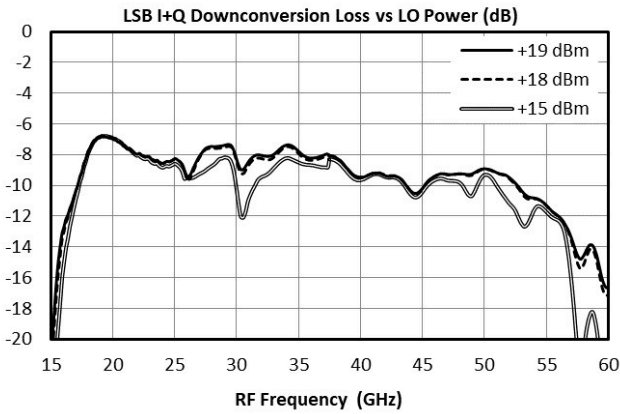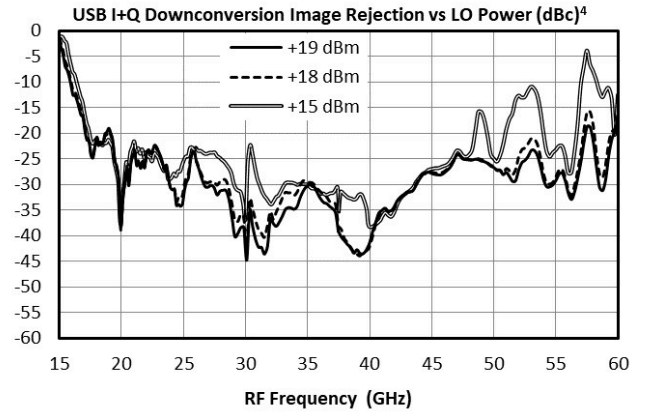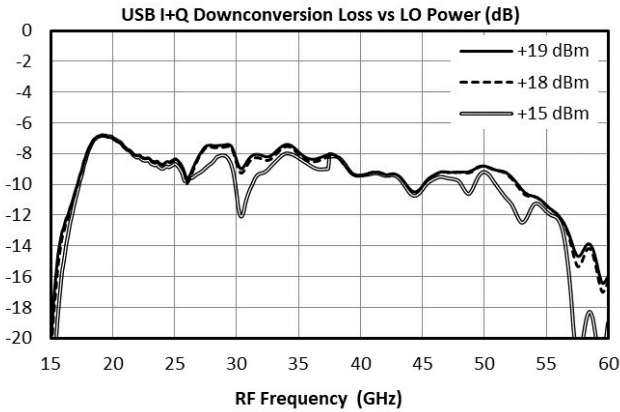





## MMIQ-1867HSM-2

### Low LO Drive Surface Mount MMIC IQ Mixer

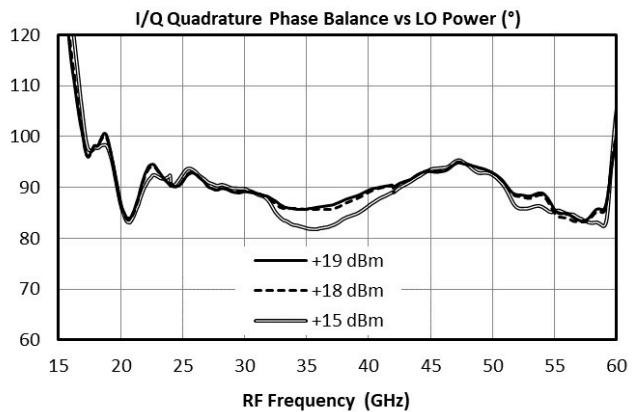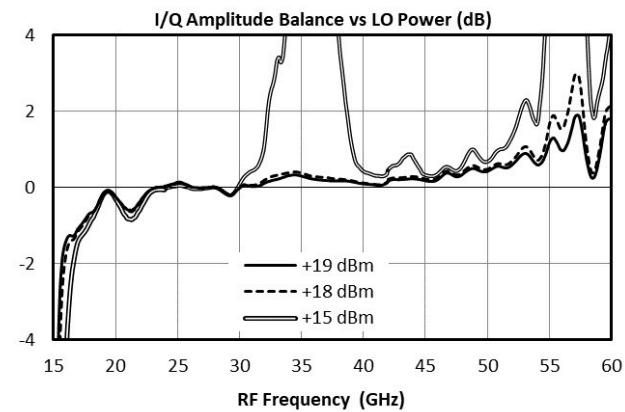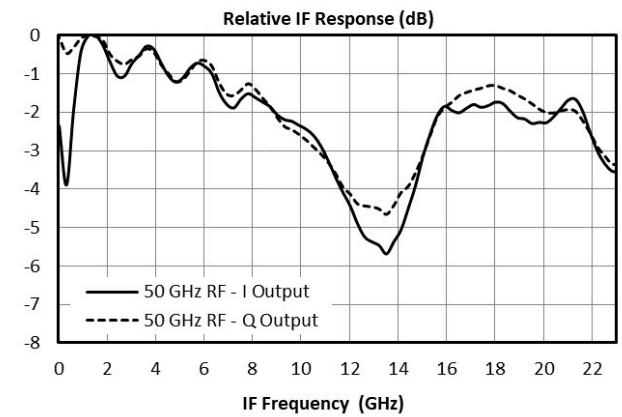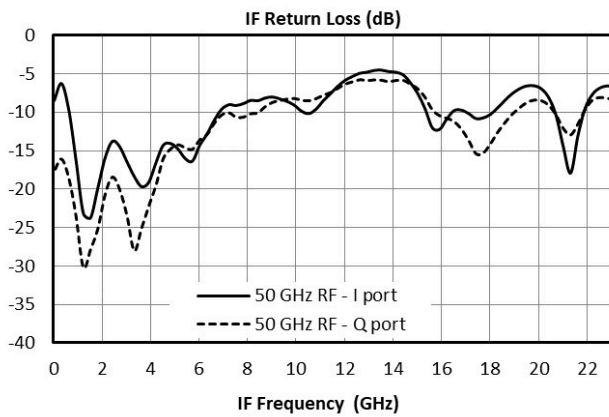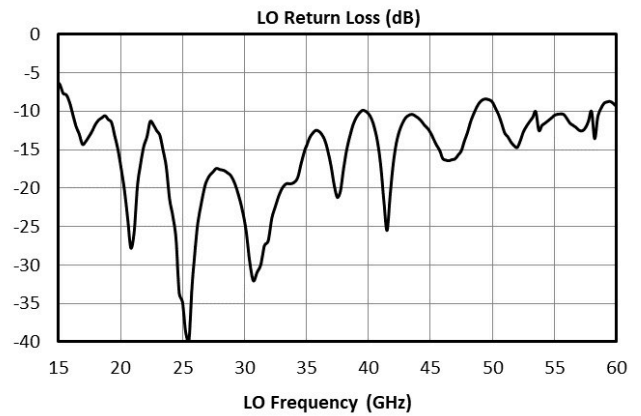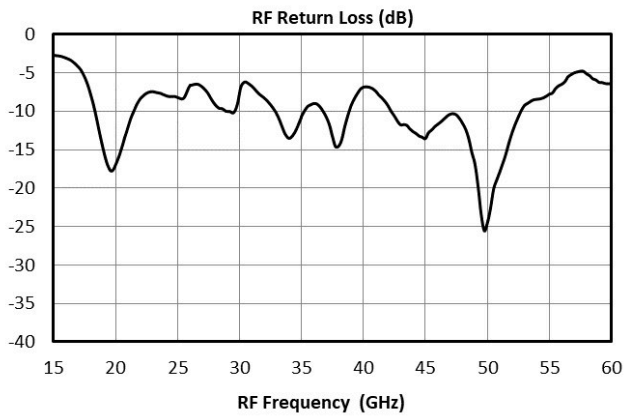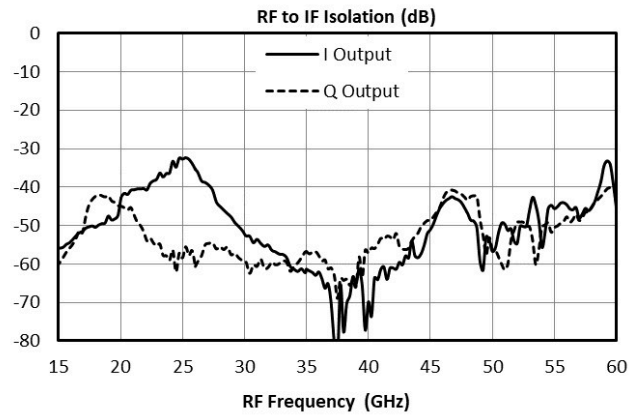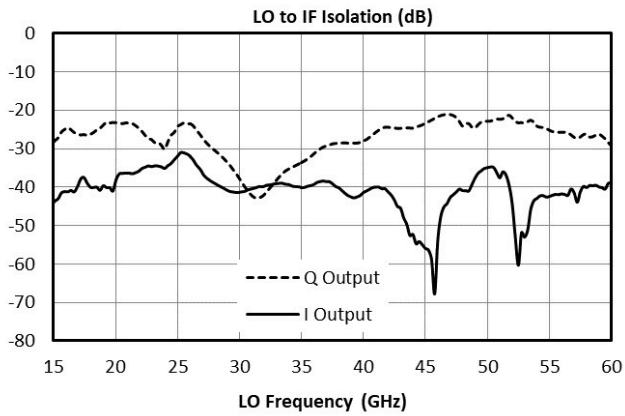

# MMIQ-1867HSM-2


## Low LO Drive Surface Mount MMIC IQ Mixer

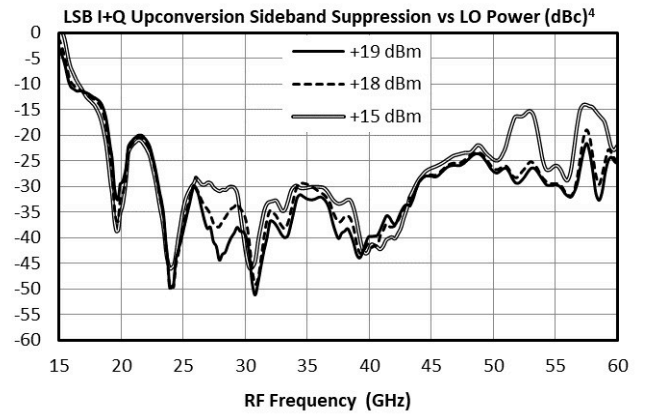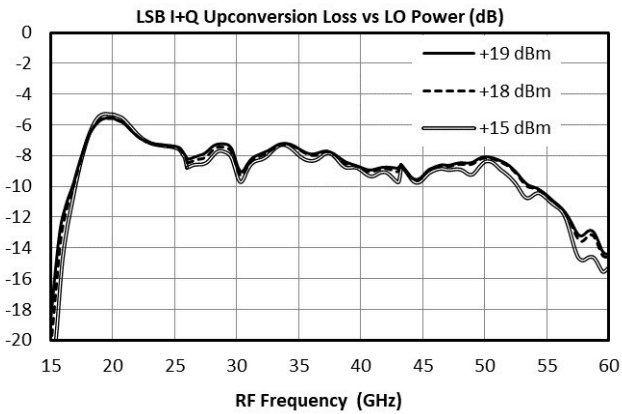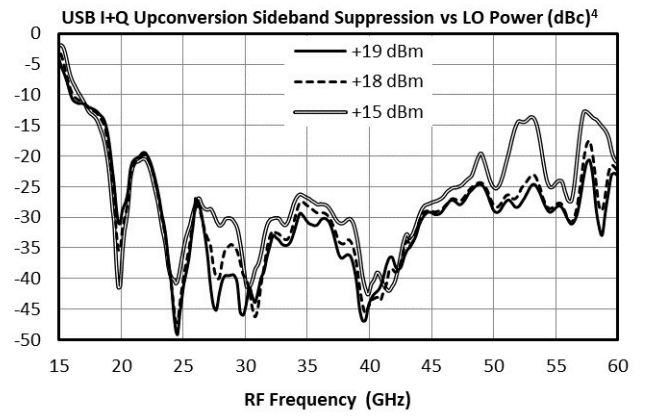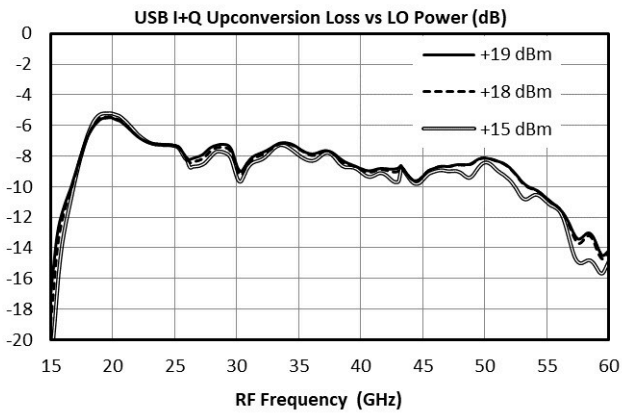





**Typical Performance Plots: 6 GHz IF Downconversion Loss w/ AMM-7210SM LO Driver**

Parameter	Pin	Start	Nominal	Stop	Units
RF Input Frequency	3	21		61	GHz
RF Input Power			-10		dBm
LO Input Frequency	9	15		55	GHz
LO Power at AMM-7210SM Input		3		9	dBm
IF Output Frequency	I+Q <sup>7</sup>	15+11	6		GHz
T <sub>A</sub> , Ambient Temperature			+25		°C
Z <sub>0</sub> , System Impedance			50		Ω





<sup>7</sup> I+Q measurements taken with an external quadrature hybrid attached to the I and Q ports of the mixer. Orientation depends on up conversion or down conversion measurement.

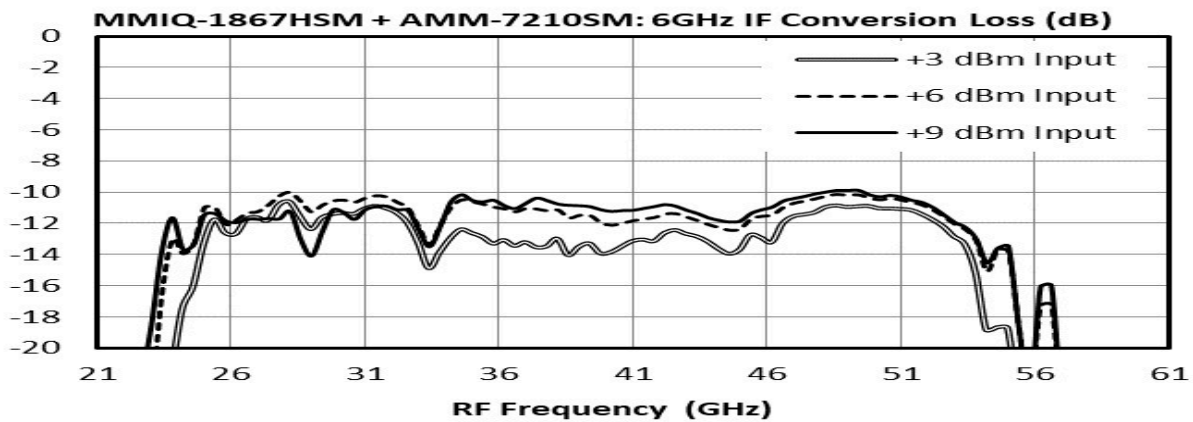



### Typical Performance Plots: IP3

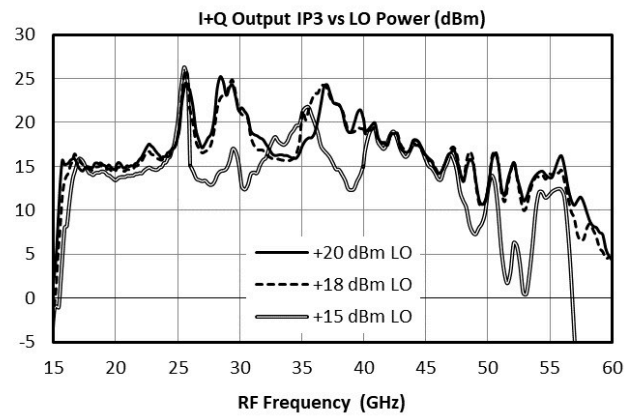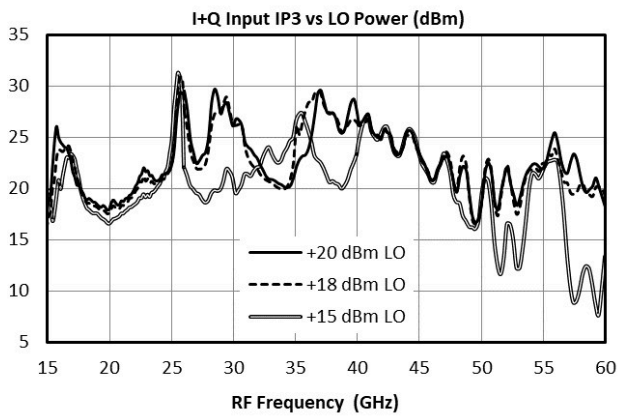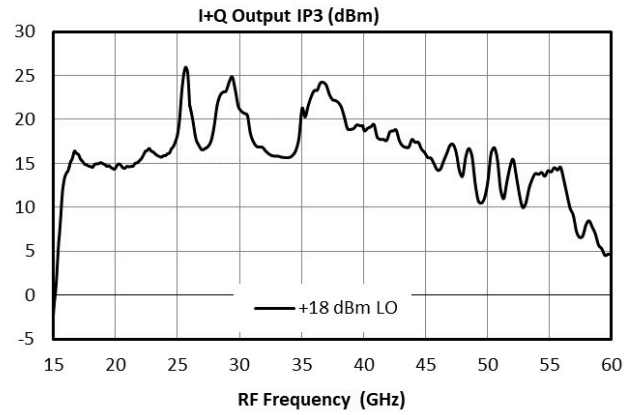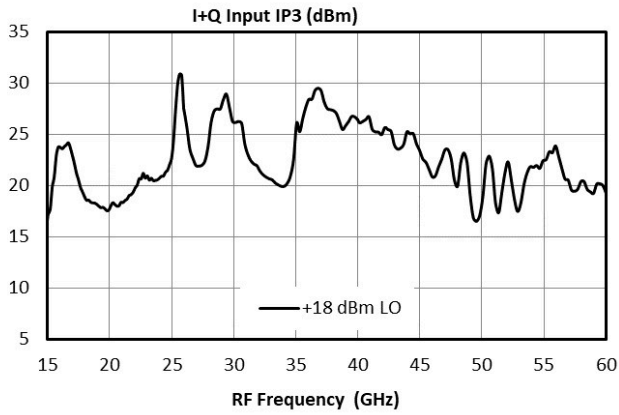

**Typical Performance Plots: LO Harmonic Isolation**

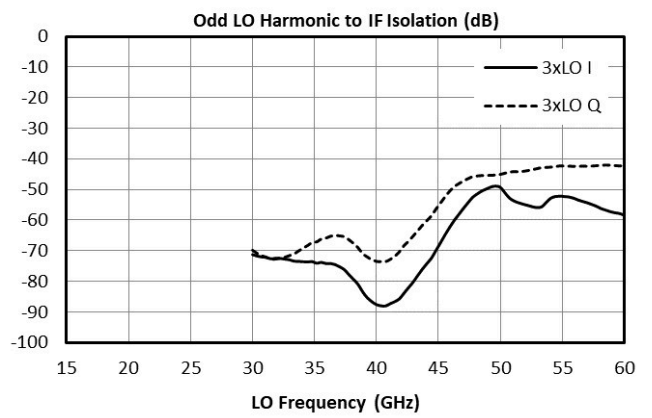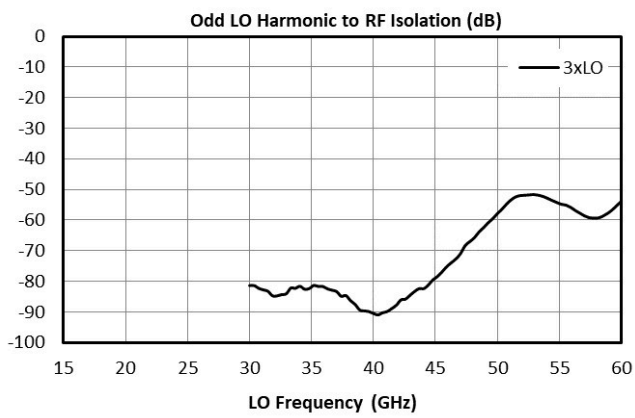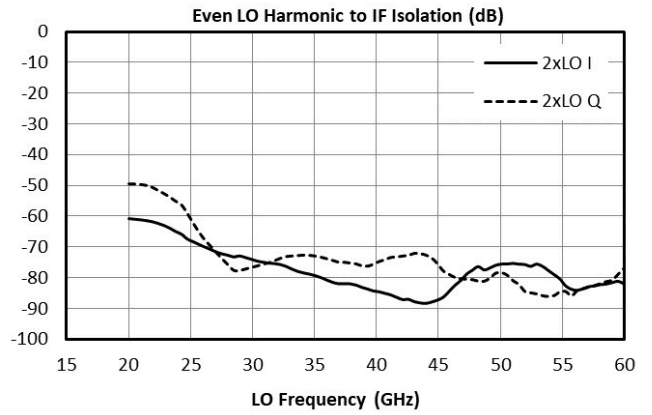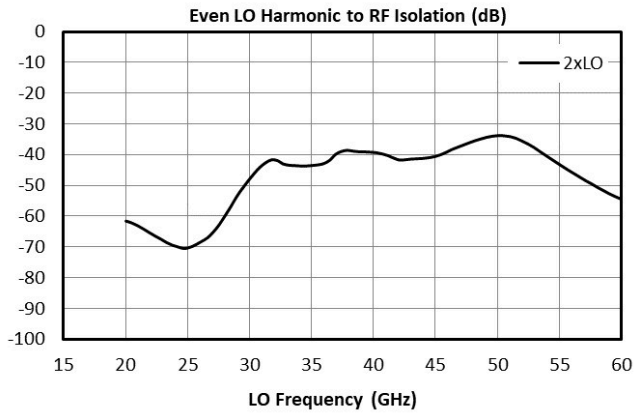

**Typical Performance Plots: Vector Modulator**

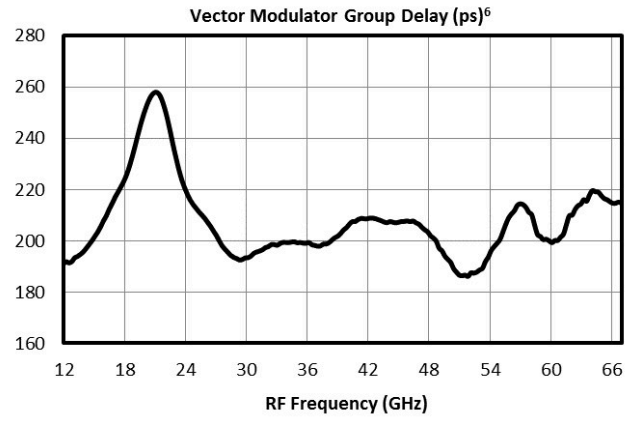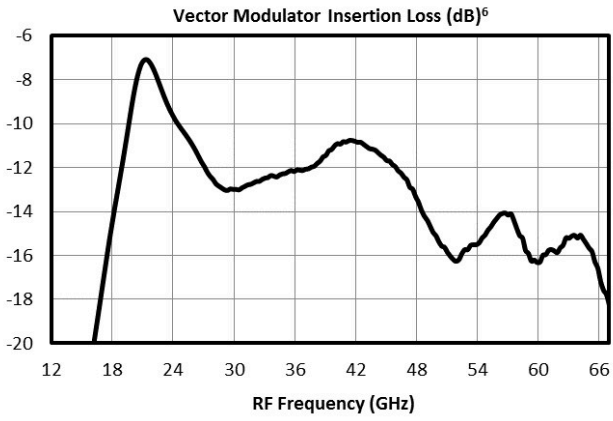

**Spur Table**

**Typical Spurious Performance: Down-Conversion**

Typical spurious data is provided by selecting RF and LO frequencies ( $\pm m \cdot LO \pm n \cdot RF$ ) within the RF/LO bands, to create a spurious output within the IF band. The mixer is swept across the full spurious band and the mean is calculated. Values typically reported are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by (n-1), where “n” is the RF spur order. For example, if the 2RF x 2LO spur is 72 dBc for a -10 dBm input, then a -20 dBm RF input creates a spur that is (2-1) x (-10 dB) lower, or 82 dBc. mLOx0RF plots can be found in section 3.6.3 Typical Performance Plots: LO Harmonic Isolation. 0LOx1RF plot is identical to the plot of LO-RF isolation.



**Typical Down-conversion spurious suppression (dBc): I Port (Q Port)**

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xRF	39 (31)	Reference	24 (27)	16 (20)	N/A	N/A
2xRF	79 (72)	46 (51)	64 (62)	61 (60)	73 (73)	74 (64)
3xRF	85 (82)	47 (53)	78 (81)	69 (73)	97 (102)	75 (74)
4xRF	N/A	N/A	100 (103)	96 (100)	150 (151)	146 (145)
5xRF	N/A	N/A	118 (128)	119 (128)	134 (138)	172 (176)

### Typical Spurious Performance: Up-Conversion

Typical spurious data is taken by mixing an input within the IF band, with LO frequencies ( $\pm m \cdot LO \pm n \cdot IF$ ), to create a spurious output within the RF output band. The mixer is swept across the full spurious output band and the mean is calculated. Values typically reported are for a -10 dBm IF input. Spurious suppression is scaled for different IF input power levels by  $(n-1)$ , where “n” is the IF spur order. For example, if the  $2IF \times 1LO$  spur is typically 74 dBc for a -10 dBm input with a sine-wave LO, then a -20 dBm IF input creates a spur that is  $(2-1) \times (-10 \text{ dB})$  lower, or 84 dBc.

**Application Circuit**

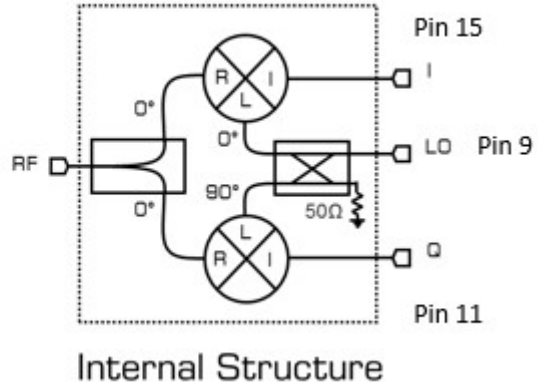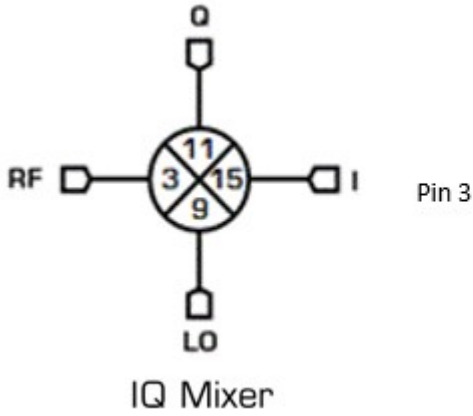

### Application Circuit Description

MMIQ-1867 belongs to Marki Microwave's MMIQ family of mixers. The MMIQ product line consists of passive GaAs MMIC mixers designed and fabricated with GaAs Schottky diodes. MMIQ mixers offer excellent amplitude and phase balance due to its on-chip LO quadrature hybrid. Up to 45 dB of image rejection (i.e., single sideband suppression) can be obtained by using the MMIQ-1867 as an image rejection or single sideband mixer. The MMIQ-1867HSM is the sister mixer of the MMIQ-1867LSM. The MMIQ-1867HSM requires a higher LO drive to operate the mixer. In exchange, the MMIQ-1867HSM displays higher linearity (i.e., higher IIP3, P1dB, Spurious Suppression) than the MMIQ-1867LSM. Marki H and L diodes correspond to different diode forward turn on voltages.



Band support for the low frequency 5G frequencies in K and Ka bands is offered by the ultra-broadband performance of the mixer's RF and LO ports (ports 3 and 9). Direct baseband to Ka band frequency conversions are available by using of this mixer as an up-converter. Traditional use of this mixer to do image reject or single sideband mixing is available with an external IF quadrature hybrid. The MMIQ-1867 is also suitable for use as a Vector Modulator through DC bias of the I and Q ports (pins 15 and 11).

Pin 3, the RF port, and Pin 9, the LO port, supports a 18-67 GHz signal. Pins 15 and 11, the I and Q ports, support a DC-23 GHz signal. A signal may be input into any port of the mixer which supports that signal's frequency. This is the basis of using the mixer as a band shifter.

For a given LO power within the recommended operating range, the RF (in the case of a down conversion) or IF (in the case of an up conversion) input power should be below the input 1 dB compression point to avoid signal distortion. The input 1 dB compression point will vary across the mixer's operating bandwidth and with LO input power. Careful characterization is required for optimal performance for each application. There is no minimum small signal input power required for operation. Excessive RF/IF input power increases non-desired spurious output power and degrades the fundamental conversion loss. Excessive LO input power can also cause this effect. The table below describes how to use an IQ mixer and quad hybrid to select a single sideband.

Up Conversion		
Hybrid Port	Mixer Port	Sideband Selected
0	I	Lower Sideband
90	Q	
90	I	Upper Sideband
0	Q	
Down Conversion		
Hybrid Port	Mixer Port	Sideband Selected
0	I	Upper Sideband
90	Q	
90	I	Lower Sideband
0	Q	

**Down-Converter**

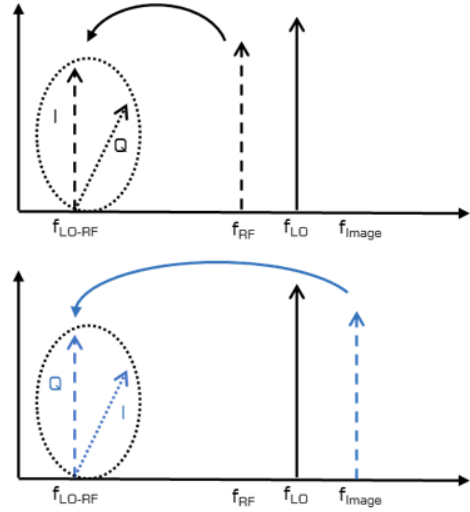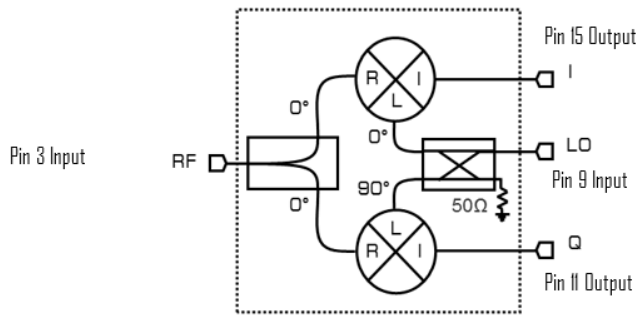


A down converter is a mixer application which takes a high frequency small signal RF input, and a high frequency large signal LO input and mixes the signals together to produce a low frequency IF output. The fundamental  $1RF \times 1LO$  outputs present at the IF port are the  $f_{LO-RF}$  and  $f_{LO+RF}$  tones. The desired output in a down conversion is typically the  $f_{LO-RF}$  term. An image frequency at  $f_{image} = f_{2LO-RF}$  will also down convert to the  $f_{LO-RF}$  frequency. The above illustration shows the relative location of the image frequency for a highside LO, or the frequency plan for which  $f_{LO} > f_{RF}$ .

To use the IQ mixer as a down converter, input a high frequency small signal RF input into pin 3, a high frequency large signal LO input into pin 9, and pull the low frequency IF output from pins 15 and 11. Pins 15 and 11 will output the IF signals I and Q. I and Q IF outputs will be at the same frequency but  $90^\circ$  out of phase (i.e., I and Q are in quadrature). If only a single IF output is desired, terminate either the I or Q ports with a wideband  $50\Omega$  load.

This is the input scheme was used to take I/Q down-conversion data found in the Typical Performance Plots.

**Image Reject Down-Converter**


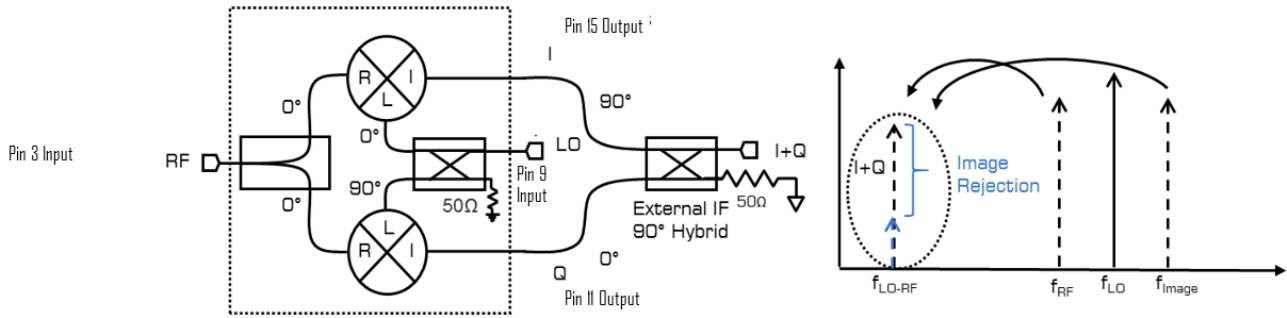


An image reject mixer is a mixer which rejects the down converted image frequency from the IF output. Image reject mixers are constructed using an external quadrature hybrid attached to the I and Q (i.e., IF) output ports of an IQ mixer. Using the external IF quadrature hybrid, one can select whether the upper sideband or lower sideband signal is suppressed with respect to the LO signal.

To use the IQ mixer as an image reject mixer, input the high frequency small signal RF into pin 3 and a high frequency large signal LO input into pin 9. Take the combined I+Q down converted signal through the IF quadrature hybrid. Select the upper sideband (i.e., suppress the lower sideband) by connecting the I port to the 0° port of the IF quadrature hybrid and attach the Q port to the 90° port of the IF quadrature hybrid. Select the lower sideband (i.e., suppress the upper sideband) by attaching the I port to the 90° port of the IF quadrature hybrid and attach the Q port to the 0° port of the IF quadrature hybrid.

This is the input scheme was used to take image rejection down-conversion data found in the Typical Performance Plots.

**Up-Converter**

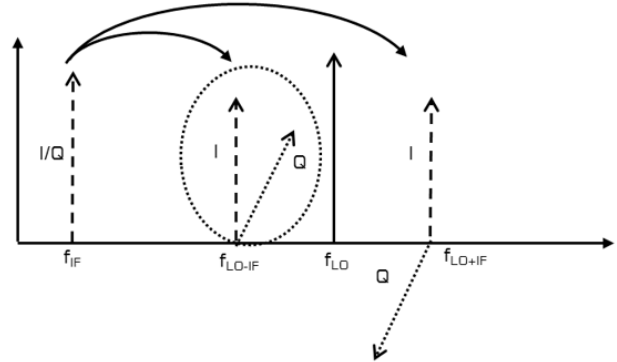
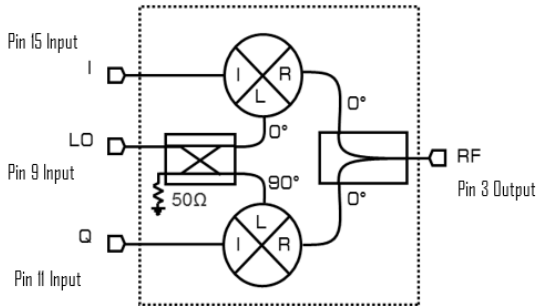


An up converter is a mixer application which takes a low frequency small signal IF input, and a high frequency large signal LO input and mixes the signal together to produce a high frequency RF output. The fundamental  $1f_{IF} \times 1f_{LO}$  outputs present at the RF port are the  $f_{LO-IF}$  and  $f_{LO+RF}$  tones. An up conversion can select either the  $f_{LO-IF}$  or the  $f_{LO+IF}$  tones. The above illustration shows both up converted sidebands with either an I or Q port input signal.

To use the IQ mixer as an up converter, input a low frequency small signal IF input into pin 15 or 11, a high frequency large signal LO input into pin 9, and pull the high frequency RF output from pin 3. Input into the Q port will result in a up converted signal that is  $90^\circ$  out of phase with the up converted I port input signal. If only a single IF input is desired, terminate either the I or Q ports with a wideband  $50\Omega$  load.

This is the input scheme used to take I/Q up-conversion data found in the Typical Performance Plots.

**Single Sideband Up-Converter**

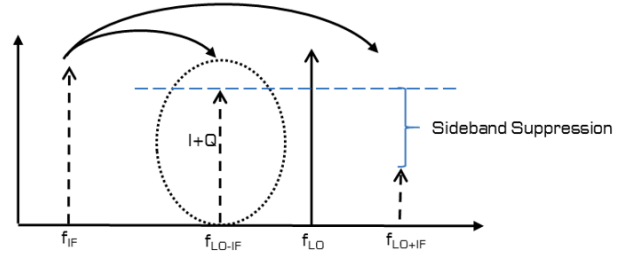
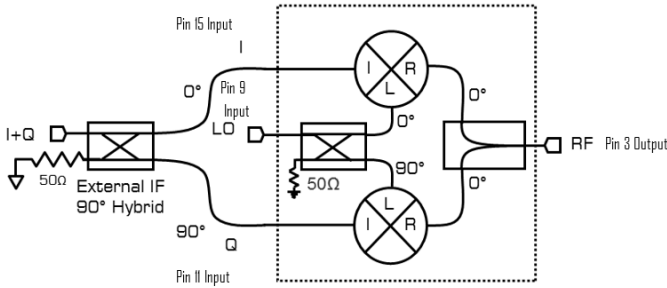


A single sideband mixer is a mixer which suppresses the up converted image frequency from the RF output. Single sideband mixers are constructed using an external quadrature hybrid attached to the I and Q (i.e., IF) input ports. Using an external IF quadrature hybrid, one can select whether the upper sideband of the lower sideband signal is suppressed with respect to the LO signal.

To use the IQ mixer as a single sideband mixer, input the low frequency small signal I+Q IF signal into the IF quadrature hybrid. The IF quadrature hybrid is attached to the I and Q ports of the IQ mixer. Input the high frequency large signal LO input into pin 9 and take the up converted high frequency RF signal from pin 3. Select the upper sideband (i.e., suppress the lower sideband) by attaching the I port to the 90° port of the IF quadrature hybrid and attach the Q port to the 0° port of the IF quadrature hybrid. Select the lower sideband (i.e., suppress the upper sideband) by attaching the I port to the 0° port of the IF quadrature hybrid and attach the Q port to the 90° port of the IF quadrature hybrid.

This is the input scheme used to take single sideband up-conversion data found in the Typical Performance Plots.

## Band Shifter

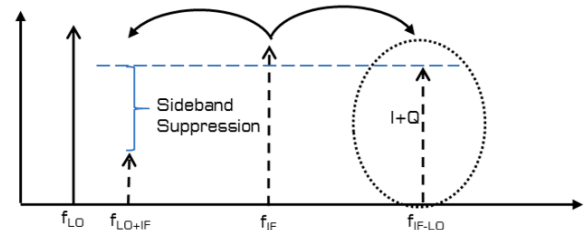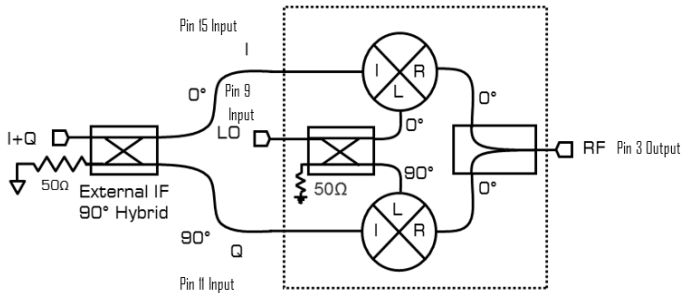

A band shifter is an unusual application for a mixer. Band shifters take an IF signal and shift it to a different band, generally to either avoid interference or for rebroadcast at a different frequency. For cases in which the desired band shift cannot be employed by using a standard up or down conversion scheme, an exotic input scheme is required.

A passive diode mixer is reciprocal on all ports. Pin 3, the RF port, supports a 18-67GHz signal. Pin 9, the LO port, supports a 18-67GHz signal. Pins 15 and 11, the IF ports, support a DC-23GHz signal. 2 signals input into any combination of the 3 ports, RF, LO, or IF, will result in an output signal at the 3<sup>rd</sup> port. In addition, an output signal will be present at both input ports. By using the IF port, as a large signal input port, low frequency LO applications can be supported.

The diagram above shows an IQ mixer being used as a band shifter. Using an IQ mixer as a band shifter allows for sideband suppression. This is identical to using the IQ mixer as a single sideband up converter. However, the large signal input port is now pin 15 + pin 11 versus pin 9. Selection of the output tone is done through the orientation of the LO quadrature hybrid.


To use the mixer as a single sideband band shifter, input a low frequency large signal LO into the external LO quadrature hybrid. Input the high frequency small signal IF signal into Pin 9 and take the high frequency RF output from pin 3. Select the upper sideband (i.e., suppress the lower sideband) by connecting the I port to the 90° port of the IF quadrature hybrid and connect the Q port to the 0° port of the LO quadrature hybrid. Select the lower sideband (i.e., suppress the upper sideband) by connecting the I port to the 0° port of the LO quadrature hybrid and connect the Q port to the 90° port of the LO quadrature hybrid.

This is the measurement scheme used to take vector modulator data found in the Typical Performance Plots: Vector Modulator.

Using this input scheme requires careful accounting of which input signal is injecting which port. Injecting a signal into any port which does not support the correct band will lead to a degraded or no output response. Abide by the maximum DC current input into the I and Q ports of the mixer or otherwise irreversible damage to the mixer will occur.

The limitation in use of the mixer as an image reject band shifter is in the bandwidth of the external LO quadrature hybrid and bandwidth of the I and Q ports.

## Vector Modulator

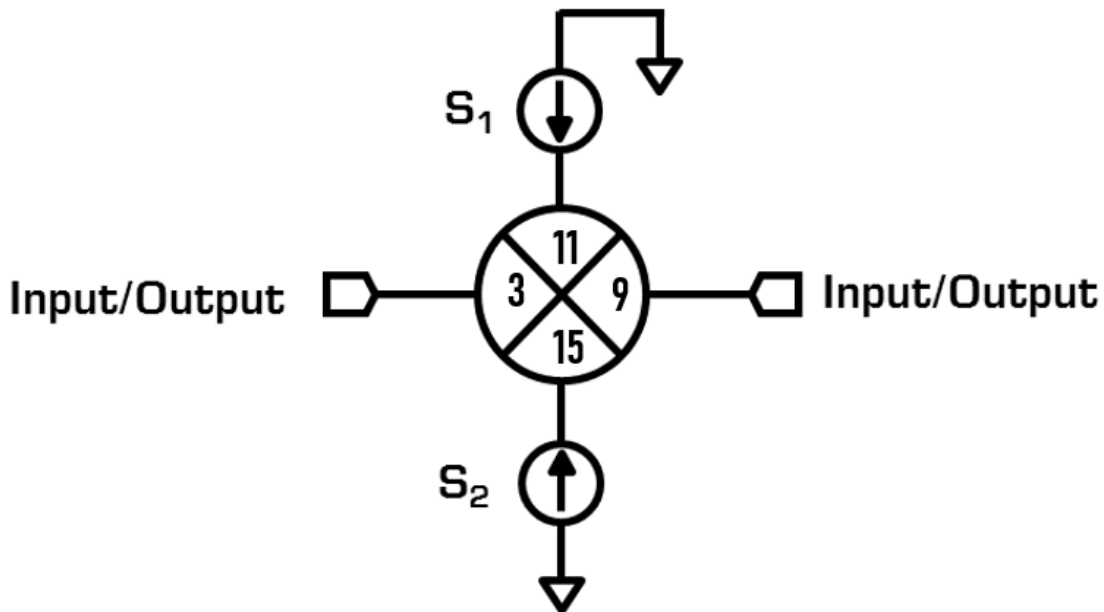

A vector modulator is a device that can modulate an input signal's amplitude and phase. Similar to using a double balanced mixer as a phase modulator or phase shifter, an IQ mixer can be used as a vector modulator. An IQ mixer can be used as a vector modulator by inputting DC current into both the I and Q ports.

Injecting DC current into both the I and Q ports forward biases both mixer cores and causes them to be shorted. This connects the RF and LO baluns allowing the input signal to pass from balun to balun without a frequency conversion. Modulating the DC current into either or both I and Q mixers causes both the phase and amplitude to modulate based on the polarity of the input current and the magnitude of the input current. Modulating only the I or Q mixers causes the device to behave as a biphaser modulator (i.e., the device can only swing the phase from  $+90^\circ$  to  $-90^\circ$ ).

To use the IQ mixer as a vector modulator, supply a DC current sufficient to turn on the mixer through both the I and Q ports. Current limiting the DC source to the maximum DC current value found in Absolute Maximum Ratings is recommended to prevent irreversible damage to the vector modulator. The typical DC current required to turn on the vector modulator is  $<30\text{mA}$ .

This is the input scheme used to take vector modulator data found in the Typical Performance Plots: Vector Modulation.


It is recommended to sequence the vector modulator by slowly increasing the DC bias until the vector modulator is operating at the user desired condition.

Near the band edges of the vector modulator, more current than is typical for mid-band operation may be necessary to achieve the same amplitude and phase shift. This is due to the on chip LO quadrature hybrid operating near its band edge.

### Mechanical Data

### Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

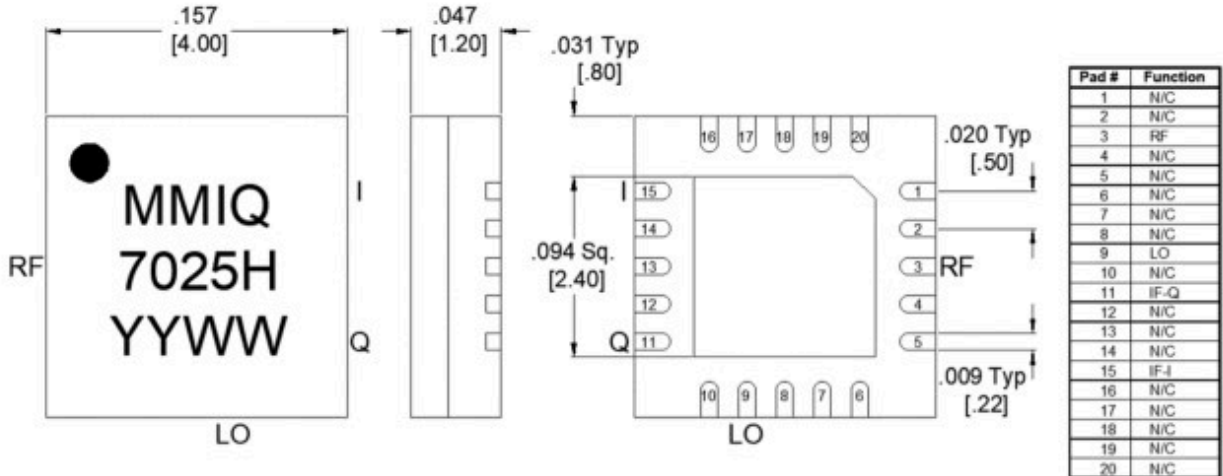


1. Substrate material is LCP.
2. I/O Leads and Die Paddle are:  
0.05 microns Gold (MAX), over  
0.02 microns Palladium (MIN), over  
0.5 microns Nickel (Min)
3. All unconnected pads should be connected to PCB RF ground.

## MMIQ-1867HSM-2


### Low LO Drive Surface Mount MMIC IQ Mixer

#### Footprint Image

Download : [Footprint Drawing](#)

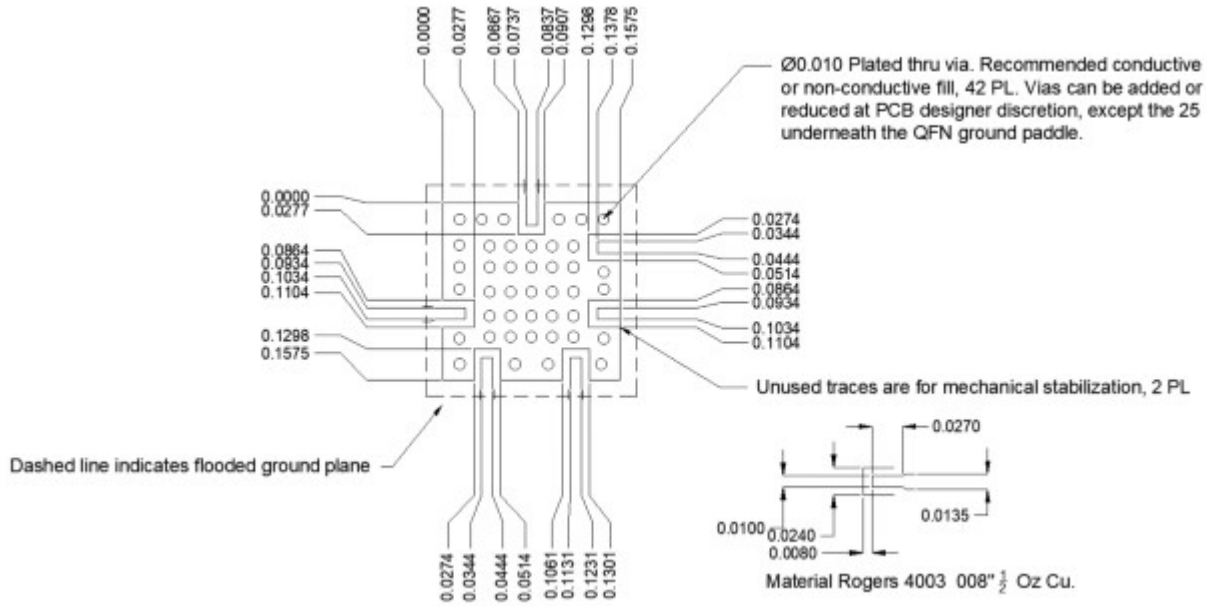

## Evaluation Board - Outline Drawing

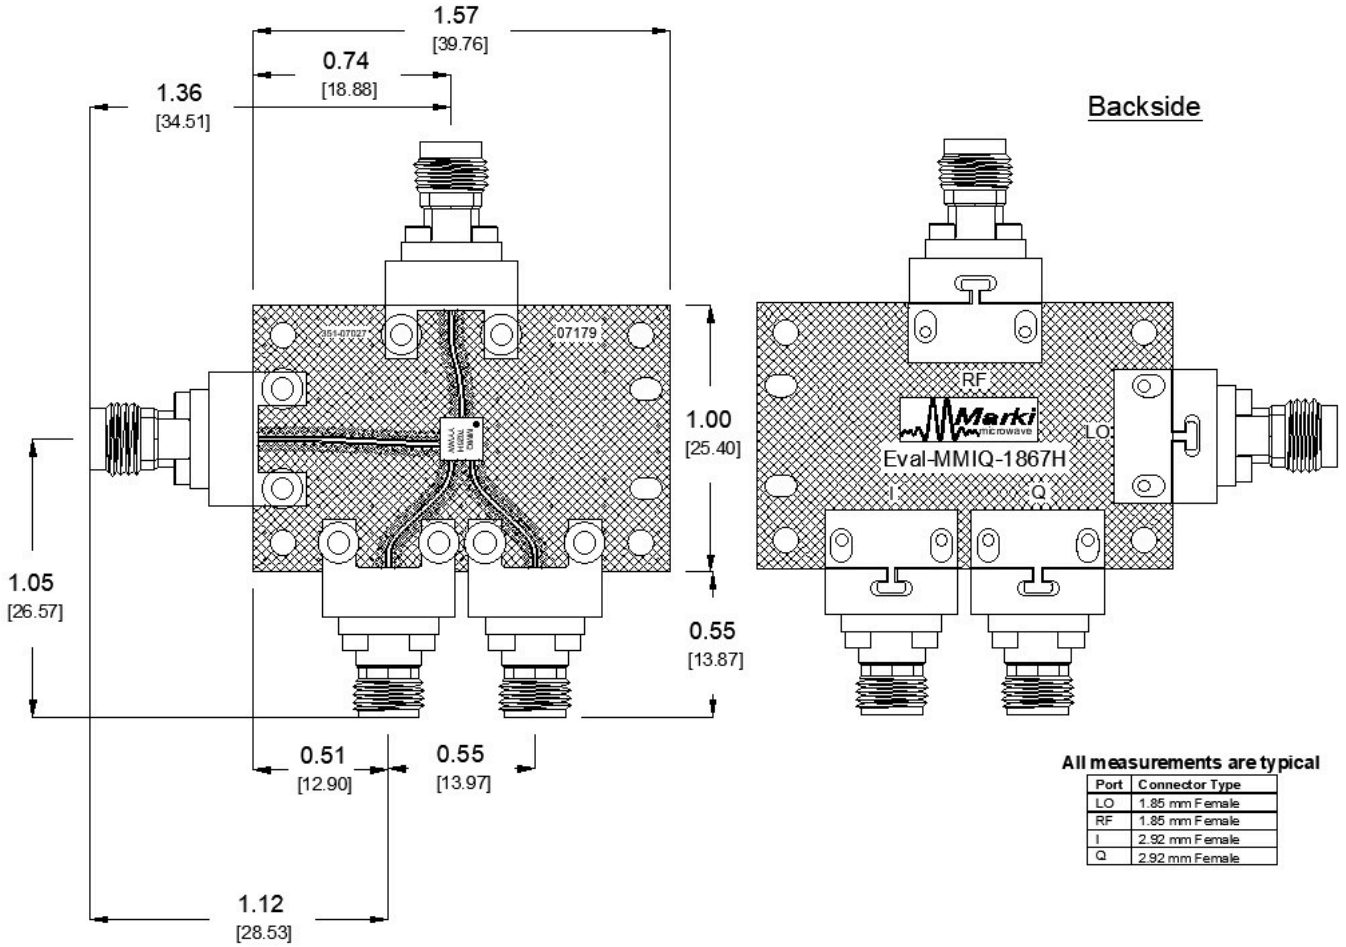

**DISCLAIMER**

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2021, 2023, Marki Microwave, LLC