


AQA-2156

21-56 GHz Amplified 4F Multiplier

DEVICE OVERVIEW

General Description

The AQA-2156 is an amplified frequency multiplier that quadruples the 5.25 – 14 GHz input frequency, producing an amplified 21 - 56 GHz quadrupled output frequency. This multiplier is designed to provide +20 dBm 4F output power with +0 dBm input power and offers superior harmonic suppressions. It can provide sufficient LO drive for Marki S-, H-, and L-diode mixers.




Features

- High fundamental rejection
- Millimeter wave output frequencies
- +20 dBm 4F output Power
- +3.5V/-5V Bias

Applications

- High frequency synthesis
- LO drive for S-diode mixers
- LO signal chain

Functional Block Diagram



Part Ordering Options

Part Number	Description	Connectors	Green Status	Product Lifecycle	Export Classification
AQA-2156	21-56 GHz Amplified 4F Multiplier	<u>Standard</u>	RoHS REACH	Released	EAR99

Table Of Contents


- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Sequencing Requirements
 - Electrical Specifications
 - Typical Performance Plots
- **Mechanical Data**
 - Outline Drawing
- **Warning Information**

Revision History






Revision Code	Revision Date	Comment
-	2020-04-01	Initial Release Datasheet
A	2020-07-01	Updated Min Output Power and Suppression Specs
B	2020-08-01	Inclusion of internal chipset
C	2020-10-01	Adjusted Build to Reduce Power Dissipation, Updated Bias Condition, Updated Absolute Maximum Specifications, Updated Performance Plots
D	2021-07-01	Adjusted Build to Reduce Power Dissipation, Updated Bias Condition, Updated Absolute Maximum Specifications, Updated Performance Plots
E	2023-03-01	Adjusted Build, Updated Electrical Specifications and Performance Plots

Port Configuration and Functions

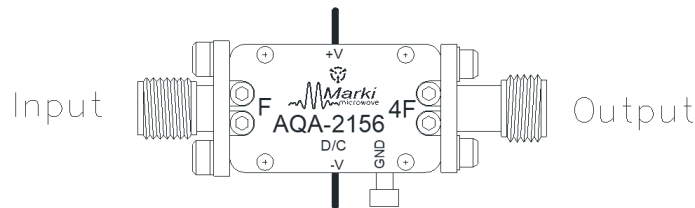Port Diagram



Port Functions

Port	Function	Connector Type	Description	DC Equivalent Circuit
Bias	Negative bias	-	Gate control for the amplifier must be connected to a -5.0 to -6.0 Volt power supply.	
GND	Ground	-	Ground path is provided through the metal housing and outer ground lug.	
Port 1	Input	SMAF	This pin is for the RF input. It is internally DC-blocked and is matched to 50 ohms from 5.25-14 GHz.	
Port 2	Output	1.85F	This pin is for the RF output. It is internally DC-blocked matched to 50 ohms from 21-56 GHz.	
Power Supply	Positive bias	-	Positive bias port must be connected to a +3V to +3.5V power supply.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	50	°C
Maximum Storage Temperature	150	°C
Minimum Operating Temperature	-40	°C
Minimum Storage Temperature	-65	°C
Negative Bias Current	3	mA
Negative Bias Voltage	-10	V
Positive Bias Current	800	mA
Positive Bias Voltage	4	V
RF Input Power	5	dBm

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Dimensions	-	21.84 x 13.21 mm

Sequencing Requirements

Turn-on Procedure:

- 1) Apply -5V to Bias port
- 2) Apply +3.5V to Power Supply port

Turn-off Procedure:

- 1) Turn off Power Supply port
- 2) Turn off Bias port

***NOTE:** RF input power may be applied at any time in the turn-on procedure.

Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system.









Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
4F Output Power	Input = 12 – 14 GHz Output = 48 - 56 GHz	-	-	-	18	-	dBm
4F Output Power	Input = 5.25 – 6.25 GHz Output = 21 - 25 GHz	-	-	-	20	-	dBm
4F Output Power	Input = 6.25 – 12 GHz Output = 25 - 48 GHz	-	-	17	21	-	dBm
Current Consumption ¹	3.5 Volts DC	-	-	-	250	-	mA
Current Consumption ²	-5.0 Volts DC	-	-	-	10	-	mA
Input Frequency Range	-	-	-	5.25	-	14	GHz
Input Power ³	-	-	-	-10	-5	0	dBm
Output Frequency Range	-	-	-	21	-	56	GHz
Suppression, 1F ⁴	Input = 5.25 – 14 GHz Output = 5.25 – 14 GHz	-	-	-	44	-	dBc
Suppression, 2F ⁵	Input = 5.25 – 14 GHz Output = 10.5 - 28 GHz	-	-	-	35	-	dBc
Suppression, 3F ⁶	Input = 5.25 – 14 GHz Output = 15.75 - 42 GHz	-	-	-	24	-	dBc
Suppression, 5F ⁷	Input = 5.25 – 13.4 GHz Output = 26.25 - 67 GHz	-	-	-	32	-	dB




[1][2] Current consumption taken under NO RF input power. Current draw will increase with increased input power. Optimal Performance is at approximately +3.5V / -5.0V.

[3] Optimal suppression levels at -10 - 0 dBm input power.

[4][5][6][7] Suppression is defined as the harmonic power relative to the 4F quadrupled output power.

Typical Performance Plots

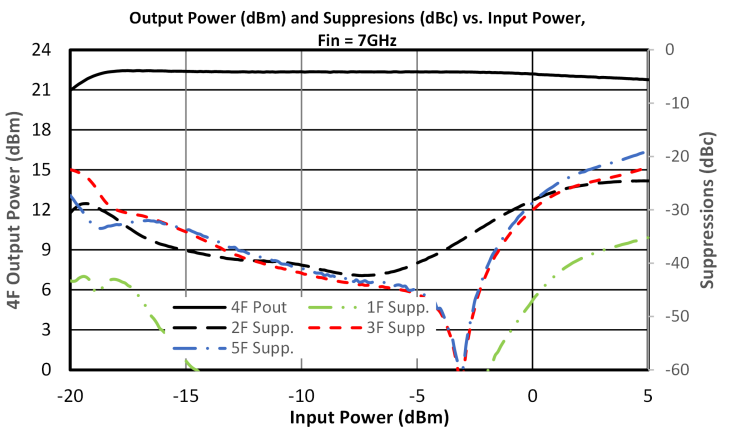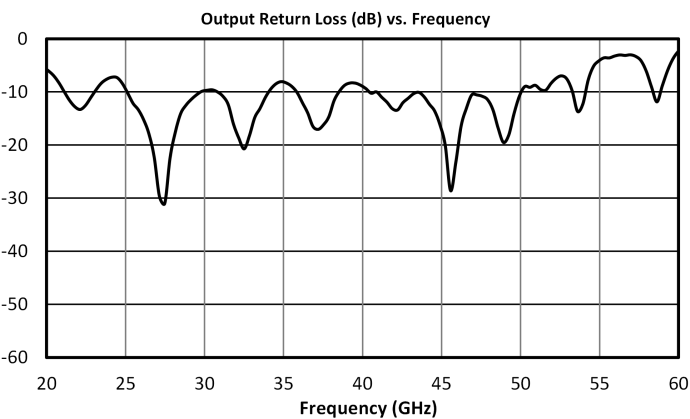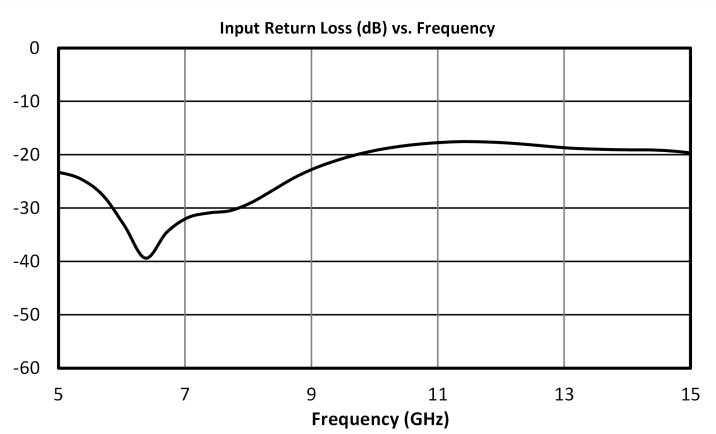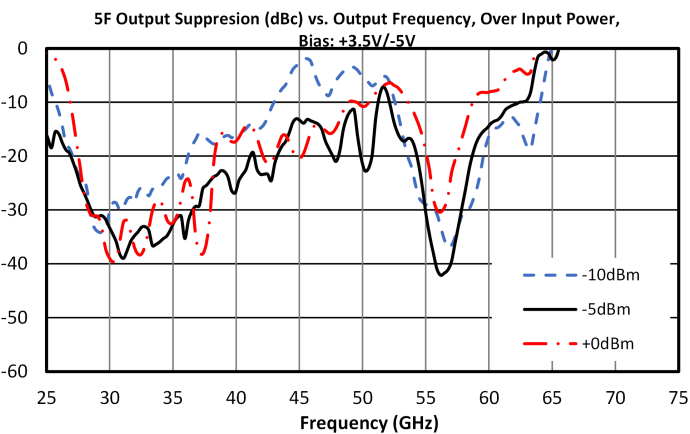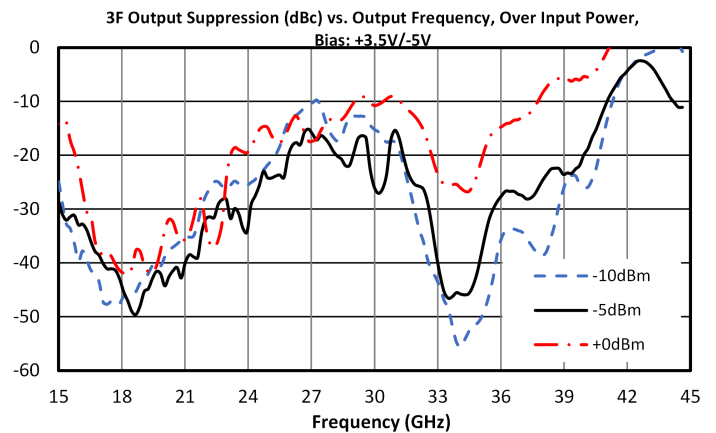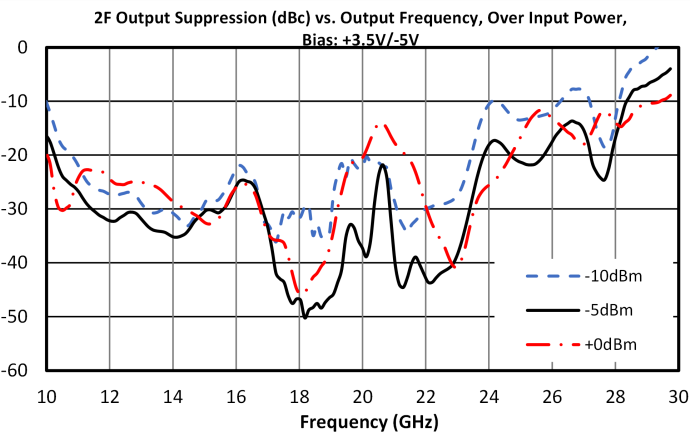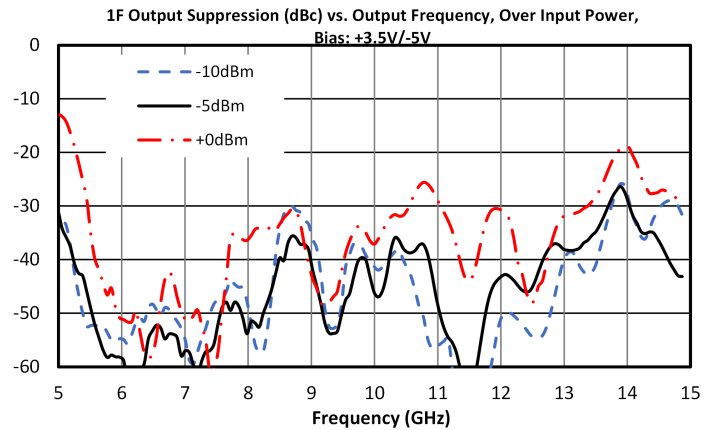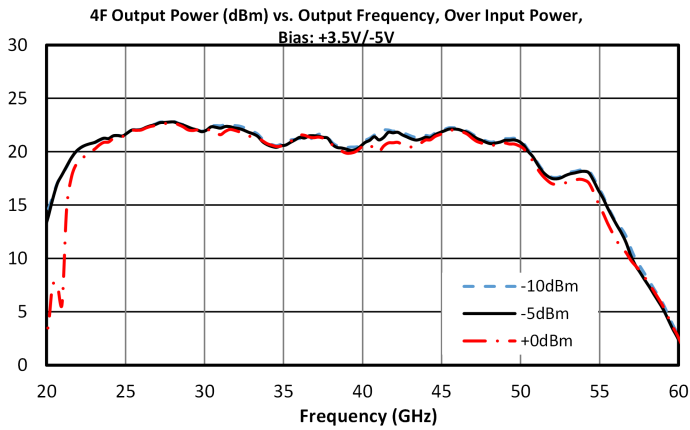


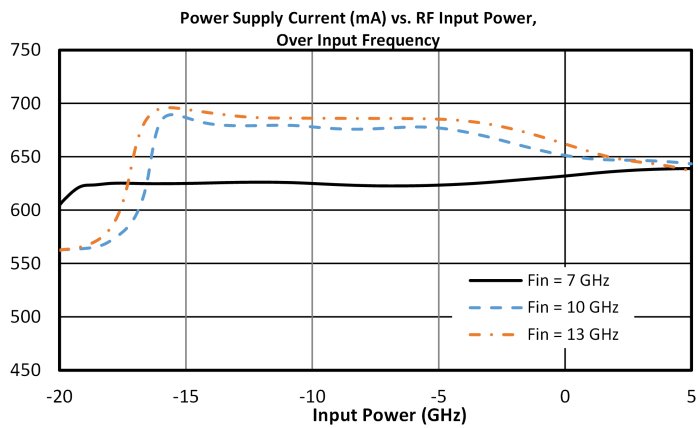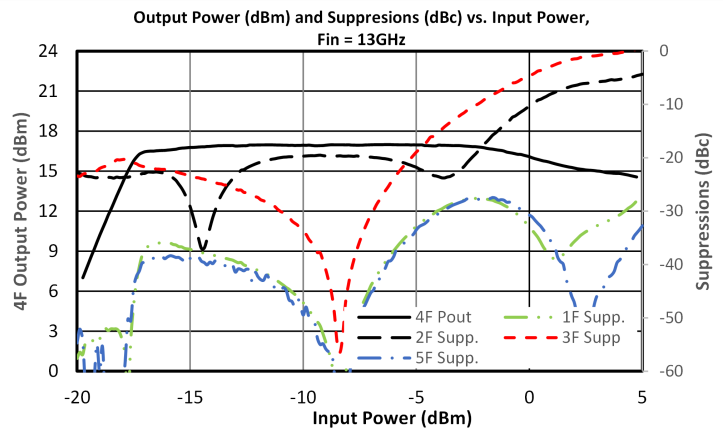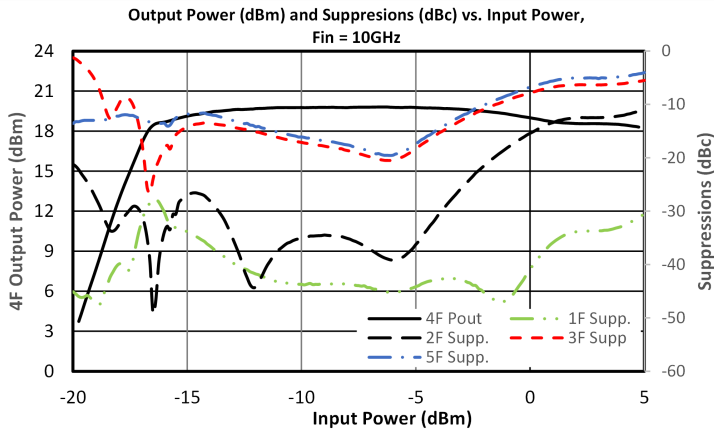

Mechanical Data


Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

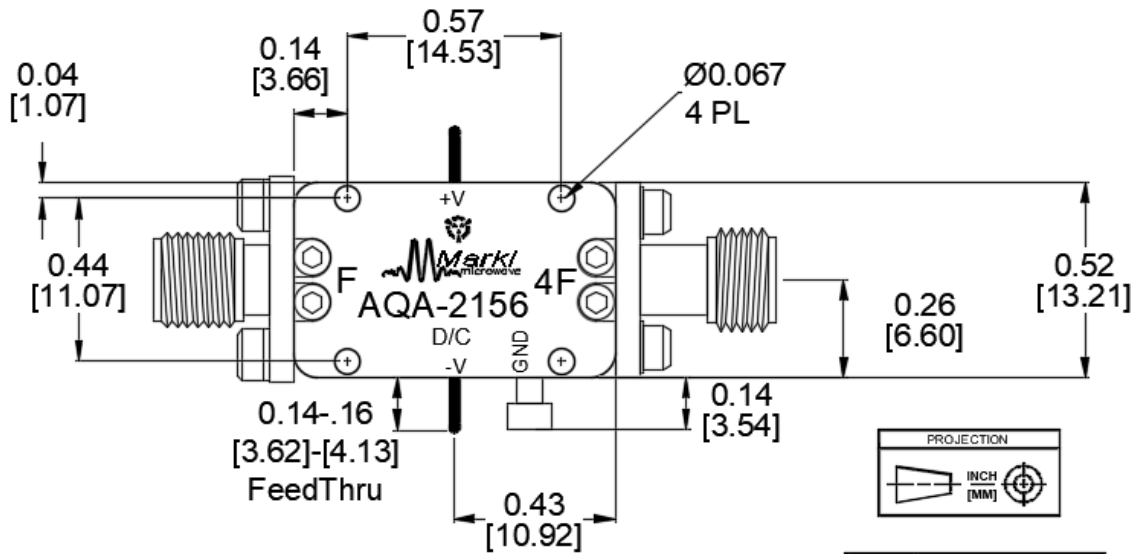

Port	Connector Type
F	SMA Female
4F	1.85 mm Female

*Note: All measurements are typical

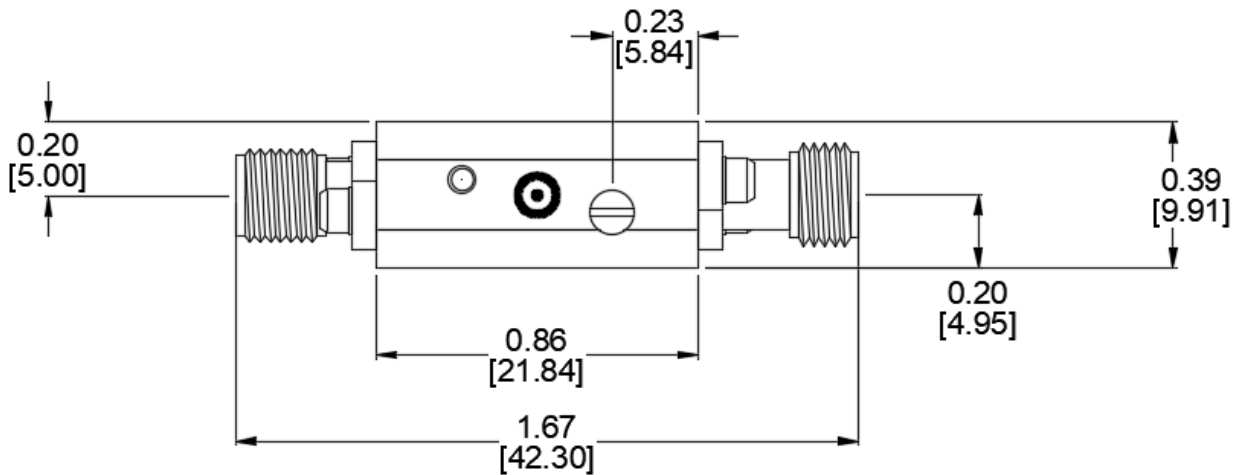

DISCLAIMER

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2020 - 2021, 2023, Marki Microwave, LLC