


IR-4509MXP-1

Image Reject Double-Balanced 4.5 - 9.0 GHz Mixers

DEVICE OVERVIEW

General Description

The IR-4509 is an image reject mixer that performs single sided downconversion, or "image reject" conversion, and offers excellent image rejection across broad bandwidths. This broadband mixer spans 4.5 to 9 GHz on the RF and LO ports with an IF from 50 to 90 MHz. IR series mixers have generally been replaced with MMIQ mixers with superior performance, repeatability, and availability. IR series mixers are still used in legacy systems and are suitable for laboratory use.




Features

- LO/RF 4.5 to 9.0 GHz
- IF 50 to 90 MHz
- 5.5 dB Typical Conversion Loss
- 30 dB Typical LO to RF Isolation
- 23 dB Typical Image Rejection
- Open Carrier or Connectorized

Applications

N/A

Functional Block Diagram

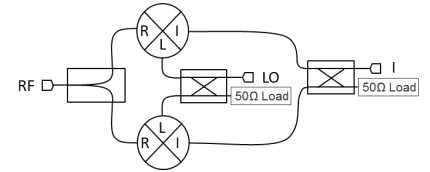

Part Ordering Options

Part Number	Description	Package	Connectors	Green Status	Product Lifecycle	Export Classification	Recommended Replacement
IR-4509MXP-2	Image Reject Double-Balanced 4.5 - 9.0 GHz Mixers	XP	Standard	Non-RoHS	Not Recommended for New Design	EAR99	-
IR-4509MXP	Image Reject Double-Balanced 4.5 - 9.0 GHz Mixers	XP	Standard	Non-RoHS	End of Life	EAR99	MMIQ-0416LSQ10R518
IR-4509LXP	Image Reject Double-Balanced 4.5 - 9.0 GHz Mixers	XP	Standard	Non-RoHS	Not Recommended for New Design	EAR99	-
IR-4509MXP-1	Image Reject Double-Balanced 4.5 - 9.0 GHz Mixers	XP	Standard	Non-RoHS	End of Life	EAR99	MMIQ-0416LSQ10R518

IR-4509MXP-1

Image Reject Double-Balanced 4.5 - 9.0 GHz Mixers

Table Of Contents

- **Device Overview**

- General Description
- Features
- Applications
- Functional Block Diagram

- **Port Configuration and Functions**

- Port Diagram
- Port Functions

- **Specifications**

- Package Information
- Recommended Operating Conditions
- Electrical Specifications
- Typical Performance Plots

- **Mechanical Data**

- Outline Drawing

- **Notes**


END OF LIFE

IR-4509MXP-1





Image Reject Double-Balanced 4.5 - 9.0 GHz Mixers

Port Configuration and Functions

Port Diagram

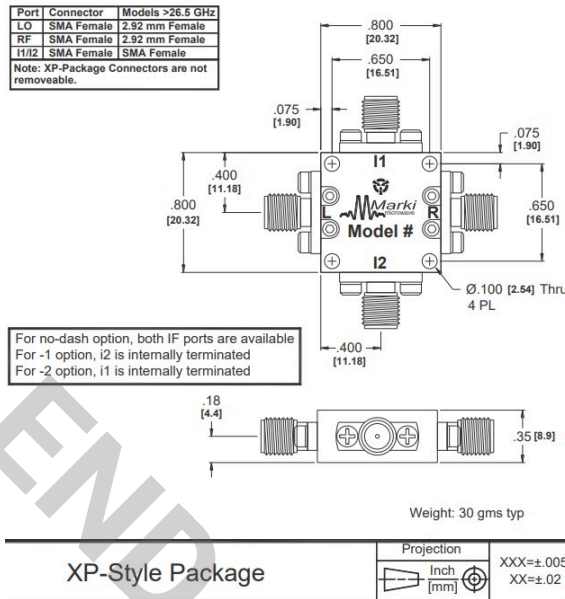

Port Functions

Port	Function	Connector Type	Description	Equivalent Circuit for Package
GND	Ground	-	XP package ground taken through metal housing.	
I	I Input / Output	SMAF	I port is diode coupled and AC matched to 50Ω over the specified I port frequency range.	
LO	LO Input	SMAF	LO port is DC short and AC matched to 50Ω over the specified LO frequency range.	
RF	RF Input / Output	SMAF	RF port is DC short and AC matched to 50Ω over the specified RF frequency range	

IR-4509MXP-1

Image Reject Double-Balanced 4.5 - 9.0 GHz Mixers

Specifications

Package Information

Parameter	Details	Rating
Weight	Package name: XP	30g
Dimensions	-	20.32 x 20.32 mm

Recommended Operating Conditions

Parameter	Min	Nominal	Max	Unit
LO Input Power	13	-	16	-

END OF LIFE

IR-4509MXP-1

Image Reject Double-Balanced 4.5 - 9.0 GHz Mixers

Electrical Specifications






Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Conversion Loss	LO/RF=4.5-9 GHz IF=0.05-0.09 GHz	4.5	9	-	5.5	8	dB
Image Rejection	LO/RF=4.5-9 GHz IF=0.05-0.09 GHz	4.5	9	15	23	-	dB
Input 1 dB Compression	LO/RF=4.5-9 GHz IF=0.05-0.09 GHz M diode level 13-16 dBm	-	-	-	-	-	dBm
Input IP3	LO/RF=4.5-9 GHz IF=0.05-0.09 GHz M diode level 13-16 dBm	4.5	6	-	16	-	dBm
Isolation, LO to IF	LO/RF=4.5-9 GHz IF=0.05-0.09 GHz	4.5	5	-	25	-	dB
Isolation, LO to RF	LO/RF=4.5-9 GHz IF=0.05-0.09 GHz	4.5	9	20	30	-	dB
Isolation, RF to IF	LO/RF=4.5-9 GHz IF=0.05-0.09 GHz	4.5	9	-	25	-	dB
IF Frequency Range	-	-	-	0.05	-	0.09	GHz
RF Frequency Range	-	-	-	4.5	-	9	GHz

IR-4509MXP-1

Image Reject Double-Balanced 4.5 - 9.0 GHz
Mixers

Typical Performance Plots

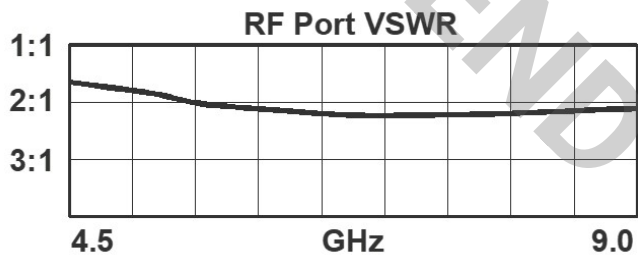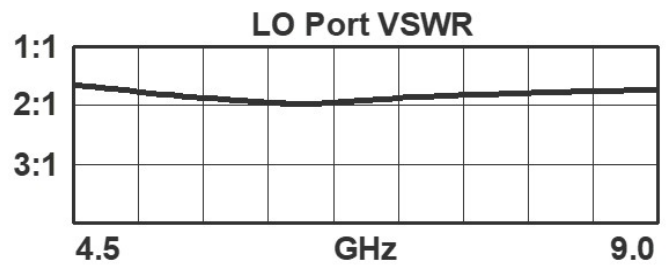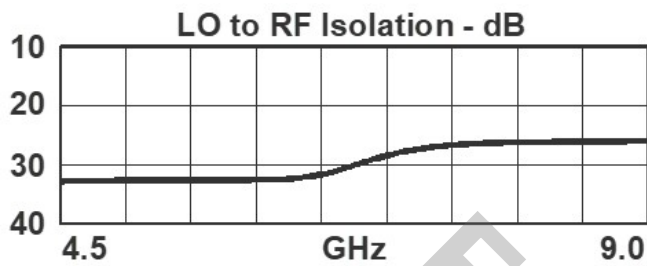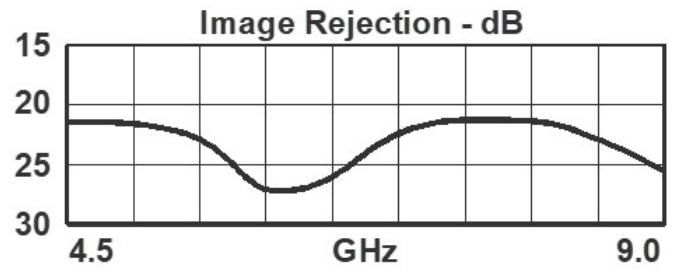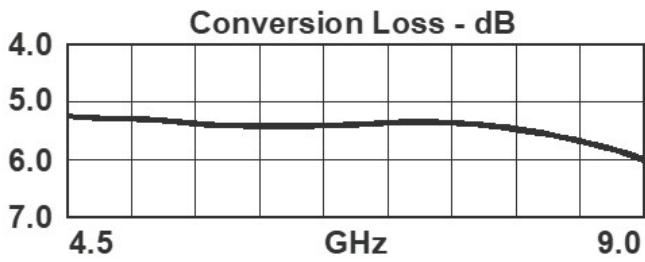

IR-4509MXP-1


Image Reject Double-Balanced 4.5 - 9.0 GHz Mixers

Mechanical Data

Outline Drawing

Port	Connector	Models >26.5 GHz
LO	SMA Female	2.92 mm Female
RF	SMA Female	2.92 mm Female
I1/I2	SMA Female	SMA Female


Note: XP-Package Connectors are not removable.

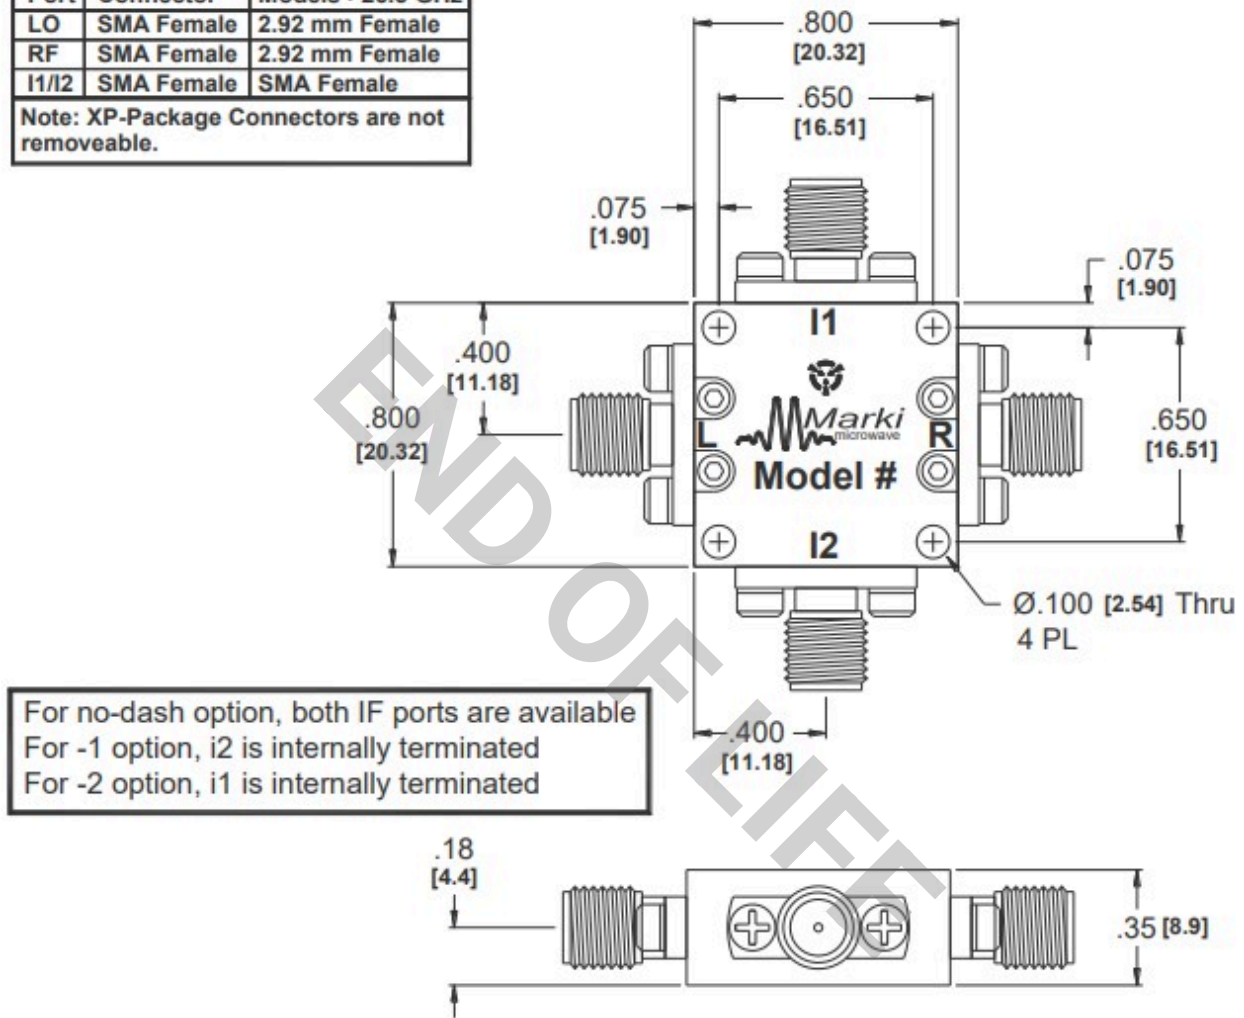

For no-dash option, both IF ports are available
 For -1 option, i2 is internally terminated
 For -2 option, i1 is internally terminated

Weight: 30 gms typ

XP-Style Package

Projection		XXX=±.005 XX=±.02
	Inch [mm]	

IR-4509MXP-1

Image Reject Double-Balanced 4.5 - 9.0 GHz Mixers

Notes

1. Mixer Conversion Loss Plot IF frequency is 70 MHz.
2. Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.
3. Conversion Loss typically degrades less than 0.5 dB for LO drives 2 dB below the lowest and 3 dB above highest nominal LO drive levels.
4. Conversion Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
5. Maximum input power is +26 dBm at +25°C, derated linearly to +23 dBm at +100°C.
6. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
7. Catalog mixer circuits are continually improved. Configuration control requires custom mixer model numbers and specifications.

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2022 - 2025, Marki Microwave, Inc