


# MMIQ-0626HSM-2

## Passive GaAs MMIC IQ Mixer

### DEVICE OVERVIEW

#### General Description

MMIQ-0626HSM is a high linearity, passive GaAs MMIC IQ mixer. This is an ultra-broadband mixer spanning 6 to 26 GHz on the RF and LO ports with an IF from DC to 6 GHz. Up to 40 dB of image rejection is available due to the excellent phase and amplitude balance of its on-chip LO quadrature hybrid. Both surface QFNs and evaluation boards are available.




#### Features

| Parameter             | Typical | Unit |
|-----------------------|---------|------|
| RF/LO Frequency Range | 6 - 26  | GHz  |
| IF Frequency Range    | DC - 6  | GHz  |
| I+Q Conversion Loss   | 9       | dB   |
| Image Rejection       | 35      | dB   |
| LO-RF Isolation       | 36      | dB   |

#### Applications

- Single Sideband and Image Rejection Mixing
- IQ Modulation / Demodulation
- Vector Amplitude Modulation
- Band Shifting

#### Functional Block Diagram



#### Part Ordering Options

| Part Number     | Description   | Package | Packing Size | Green Status  | Product Lifecycle | Export Classification |
|-----------------|---|---------|--------------|---------------|-------------------|-----------------------|
| MMIQ-0626HSM-2  | Passive GaAs MMIC IQ Mixer                              | QFN     | -            | REACH<br>RoHS | Released          | EAR99                 |
| EVAL-MMIQ-0626H | Evaluation Board, Passive GaAs MMIC 6 - 26 GHz IQ Mixer | EVAL    | -            | REACH<br>RoHS | Released          | EAR99                 |
| MMIQ-0626H-2-TR | Tape and Reel, Passive GaAs MMIC IQ Mixer               | QFN     | 7"           | REACH<br>RoHS | Released          | EAR99                 |

## Table Of Contents

- **Device Overview**
  - General Description
  - Features
  - Applications
  - Functional Block Diagram
- **Port Configuration and Functions**
  - Port Diagram
  - Port Functions
- **Revision History**
- **Specifications**
  - Absolute Maximum Ratings
  - Package Information
  - Recommended Operating Conditions
  - Sequencing Requirements
  - Electrical Specifications
  - Typical Performance Plots
  - Spur Tables
- **Mechanical Data**
  - Outline Drawing
- **Footprint Image**
- **Evaluation Board**
  - Evaluation Board Outline Drawing


## Revision History

| Revision Code | Revision Date | Comment                           |
|---------------|---------------|-----------------------------------|
| -             | 2018-08-01    | Datasheet Initial Release         |
| A             | 2019-08-01    | Changed I/Q Max Current Rating    |
| B             | 2019-10-01    | Updated Max Power Rating          |
| C             | 2022-02-01    | I/Q Port Functions, Plots Updated |






## Port Configuration and Functions

### Port Diagram

A bottom-up view of the MMIQ-0626H's SM package outline drawing is shown below. The mixer may be operated as either a downconverter or an upconverter. Use of the RF or IF as the input or output port will depend on the application.

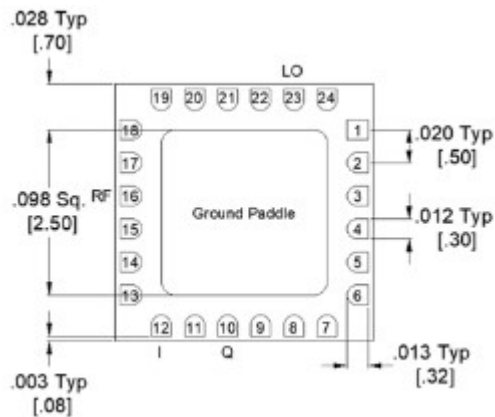

### Port Functions

| Port   | Function          | Description  | Equivalent Circuit for Package   |
|--------|-------------------|--|--|
| GND    | Ground            | SM package ground path is provided through the ground paddle.                            | <b>GND</b>  |
| Pin 10 | Q Input / Output  | Pin 10 is diode coupled and AC matched to 50Ω over the specified I port frequency range. | <b>P10</b>  |
| Pin 12 | I Input / Output  | Pin 12 is diode coupled and AC matched to 50Ω over the specified Q port frequency range. | <b>P12</b>  |
| Pin 16 | RF Input / Output | Pin 16 is DC short and AC matched to 50Ω over the specified RF frequency range.          | <b>P16</b>  |
| Pin 23 | LO Input          | Pin 23 is DC open and AC matched to 50Ω over the specified LO frequency range.           | <b>P23</b>  |

## Specifications

### Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

| Parameter                     | Maximum Rating | Unit |
|-------------------------------|----------------|------|
| Maximum Operating Temperature | 100            | °C   |
| Maximum Storage Temperature   | 125            | °C   |
| Minimum Operating Temperature | -55            | °C   |
| Minimum Storage Temperature   | -65            | °C   |
| Pin 10 DC Current             | 30             | mA   |
| Pin 12 DC Current             | 30             | mA   |
| Power Handling, at any Port   | 26             | dBm  |

### Package Information

| Parameter                  | Details            | Rating       |
|----------------------------|--------------------|--------------|
| ESD                        | 250 to < 500 Volts | HBM Class 1A |
| Dimensions                 | -                  | 4 x 4 mm     |
| Moisture Sensitivity Level | -                  | MSL 1        |

### Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications.

| Parameter           | Min | Nominal | Max | Unit |
|---------------------|-----|---------|-----|------|
| RF/IF Input Power   | -   | -       | 11  | dBm  |
| Ambient Temperature | -55 | 25      | 100 | °C   |
| LO Input Power      | 13  | 19      | 23  | dBm  |

### Sequencing Requirements

There is no requirement to apply power to the ports in a specific order. However, it is recommended to provide a 50Ω termination to each port before applying power. This is a passive diode mixer that requires no DC bias.

## Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for a down conversion application with a +19dBm sine wave LO input. Min and Max limits apply only to our connectorized units and are guaranteed at TA=+25°C. All bare die are 100% DC tested and visually inspected.

| Parameter                                   | Test Conditions                          | Minimum Frequency (GHz) | Maximum Frequency (GHz) | Min | Typ | Max | Unit |
|---|--|-------------------------|-------------------------|-----|-----|-----|------|
| Amplitude Balance <sup>1</sup>              | -  | -                       | -                       | -   | 0.5 | -   | dB   |
| Conversion Loss <sup>2</sup>                | RF/LO = 24 - 26 GHz<br>Q = DC - 0.2 GHz  | 24                      | 26                      | -   | 14  | 17  | dB   |
| Conversion Loss <sup>3</sup>                | RF/LO = 6 - 24 GHz<br>I = DC - 0.2 GHz   | 6                       | 24                      | -   | 12  | 16  | dB   |
| Conversion Loss <sup>4</sup>                | RF/LO = 6 - 24 GHz<br>Q = DC - 0.2 GHz   | 6                       | 24                      | -   | 12  | 14  | dB   |
| Conversion Loss <sup>5</sup>                | RF/LO = 6 - 26 GHz<br>I = 0.2 - 6 GHz    | 6                       | 26                      | -   | 12  | -   | dB   |
| Conversion Loss <sup>6</sup>                | RF/LO = 6 - 26 GHz<br>Q = 0.2 - 6 GHz    | 6                       | 26                      | -   | 13  | -   | dB   |
| IF Frequency Range                          | -  | -                       | -                       | 0   | -   | 6   | GHz  |
| Image Rejection <sup>7</sup>                | RF/LO = 6 - 26 GHz<br>I+Q = DC - 0.2 GHz | 6                       | 26                      | -   | 35  | -   | dB   |
| Input 1 dB Gain Compression Point (P1dB), I | -  | -                       | -                       | -   | 11  | -   | dBm  |
| Input 1 dB Gain Compression Point, Q        | -  | -                       | -                       | -   | 11  | -   | dBm  |
| Input IP3 <sup>8</sup>                      | RF/LO = 6 - 26 GHz<br>I+Q = DC - 0.2 GHz | 6                       | 26                      | -   | 25  | -   | dBm  |
| Isolation, LO to IF                         | IF/LO = 6 - 26 GHz                       | 6                       | 26                      | -   | 43  | -   | dB   |
| Isolation, LO to RF                         | RF/LO = 6 - 26 GHz                       | 6                       | 26                      | -   | 36  | -   | dB   |
| Isolation, RF to IF                         | RF/IF = 6 - 26 GHz                       | 6                       | 26                      | -   | 34  | -   | dB   |
| LO Frequency Range                          | -  | -                       | -                       | 6   | -   | 26  | GHz  |
| Noise Figure <sup>9</sup>                   | RF/LO = 6 - 24 GHz<br>I = DC - 0.2 GHz   | 6                       | 24                      | -   | 12  | -   | dB   |
| Noise Figure <sup>10</sup>                  | RF/LO = 6 - 24 GHz<br>Q = DC - 0.2 GHz   | 6                       | 26                      | -   | 12  | -   | dB   |
| Phase Balance                               | -  | -                       | -                       | -   | 3   | -   | °    |
| Q (Port 4) Frequency Range                  | -  | -                       | -                       | 0   | -   | 6   | GHz  |
| RF Frequency Range                          | -  | -                       | -                       | 6   | -   | 26  | GHz  |
| Conversion Loss <sup>11</sup>               | RF/LO = 24 - 26 GHz<br>I = DC - 0.2 GHz  | 24                      | 26                      | -   | 12  | 14  | dB   |

<sup>[1]</sup> Amplitude and phase balance measured in a down conversion.

<sup>[2][3][4][5][6][11]</sup> Measured as an I/Q down converter. (i.e., I and Q powers are not combined)

<sup>[7]</sup> Image Rejection and Single sideband performance plots are defined by the upper sideband (USB) or lower sideband (LSB) with respect to the LO signal. Plots are defined by which sideband is selected by the external IF quadrature hybrid.

<sup>[8]</sup> Typical IIP3 measured with I and Q ports combined with an external quadrature hybrid coupler in a down conversion.

<sup>[9][10]</sup> Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.

**Typical Performance Plots**

| Parameter                            |                  | Pin | Start | Nominal | Stop   | Units |
|--------------------------------------|------------------|-----|-------|---------|--------|-------|
| RF Input Frequency                   |                  | 16  | 0     |         | 26     | GHz   |
| RF Input Power                       |                  |     |       | -10     |        | dBm   |
| LO Input Frequency                   |                  | 23  | 0.091 |         | 26.091 | GHz   |
| LO Input Power                       |                  |     |       | +19     |        | dBm   |
| IF Output Frequency                  | Q                | 10  |       | 91      | MHz    |       |
|                                      | I                | 12  |       | 91      |        |       |
|                                      | I+Q <sup>8</sup> | 3+4 |       | 91      |        |       |
| T <sub>A</sub> , Ambient Temperature |                  |     |       | +25     |        | °C    |
| Z <sub>0</sub> , System Impedance    |                  |     |       | 50      |        | Ω     |





I output means that the IF output signal is measured at the I port of the mixer and the Q port is loaded. Q output means the IF output signal is measured at the Q port of the mixer while the I port is loaded.









<sup>4</sup>Image Rejection and Single sideband performance plots are defined by the upper sideband (USB) or lower sideband (LSB) with respect to the LO signal. Plots are defined by which sideband is selected by the external IF quadrature hybrid.









<sup>5</sup> Amplitude and phase balance measured in a down conversion.







<sup>6</sup> Typical IIP3 measured with I and Q ports combined with an external quadrature hybrid coupler in a down conversion.

<sup>8</sup>I+Q measurements taken with an external quadrature hybrid attached to the I and Q ports of the mixer. Orientation depends on up conversion or down conversion measurement.

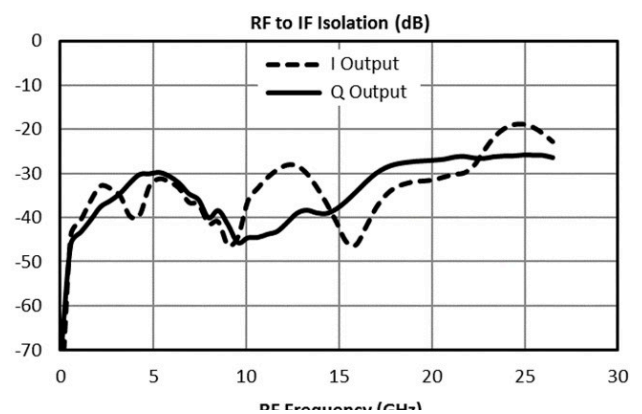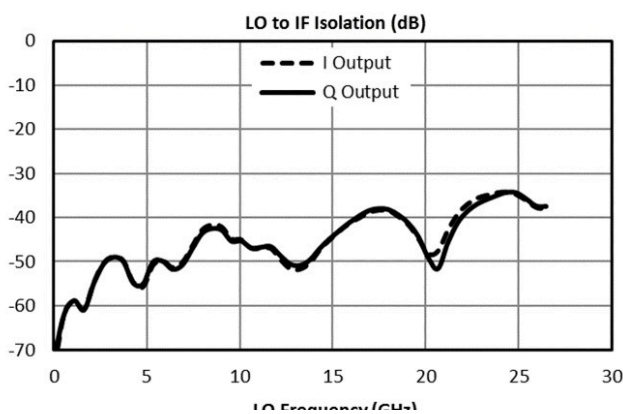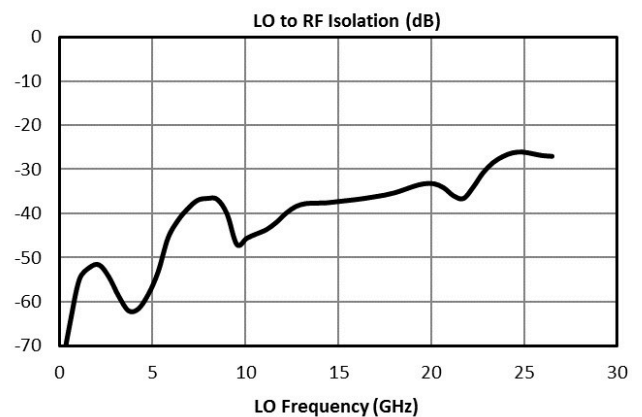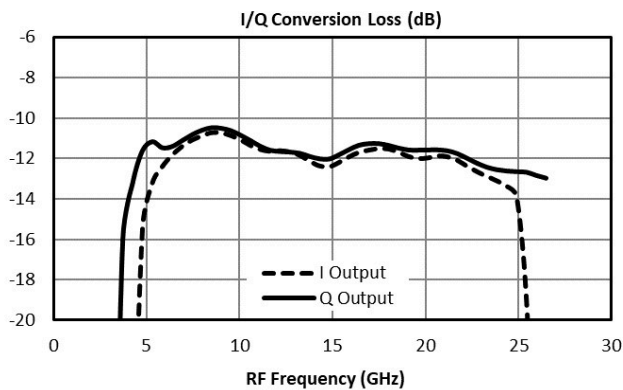

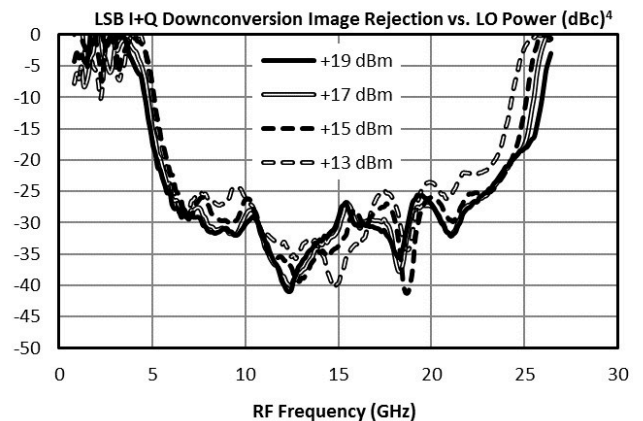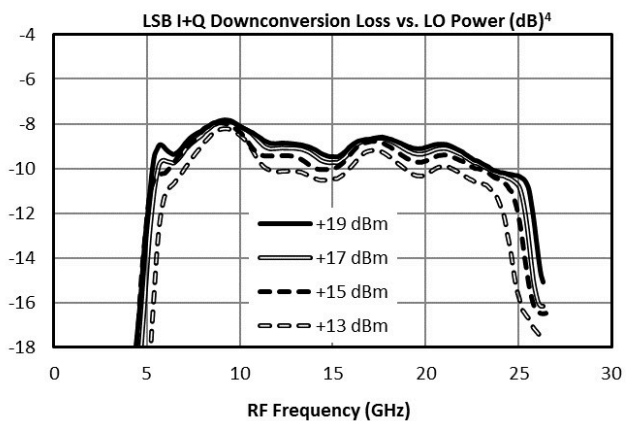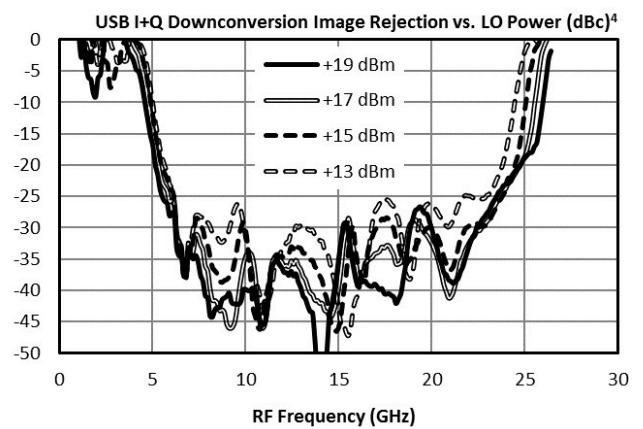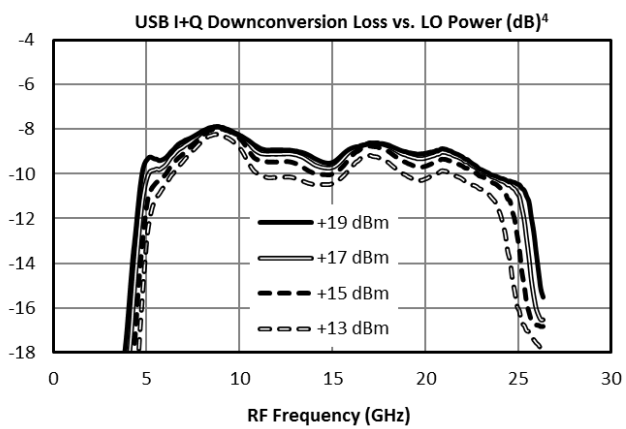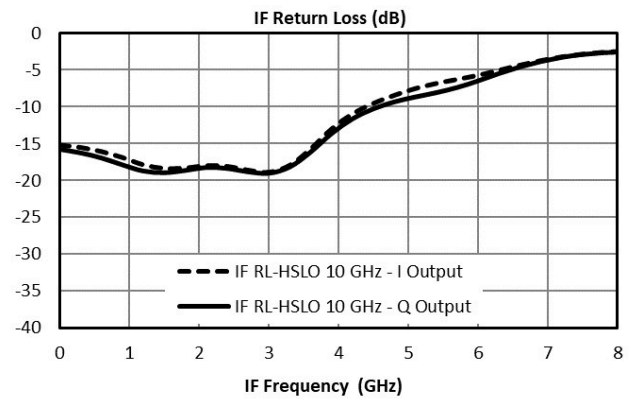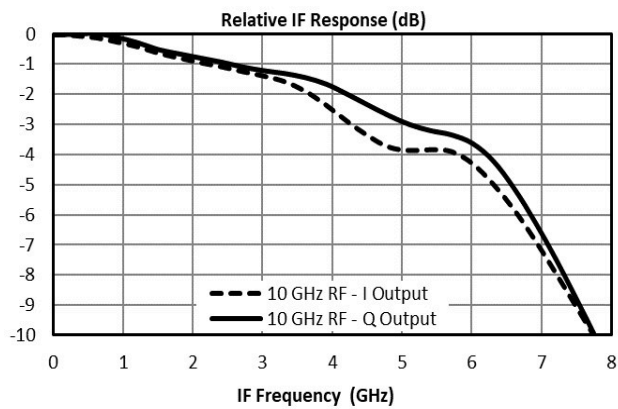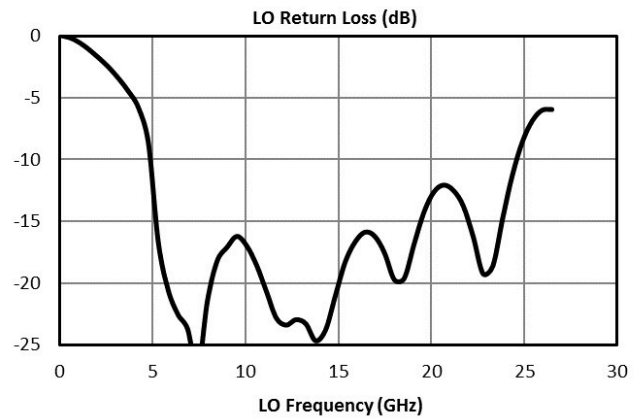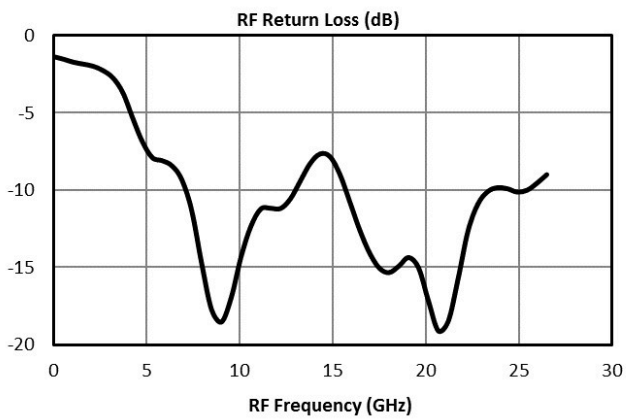

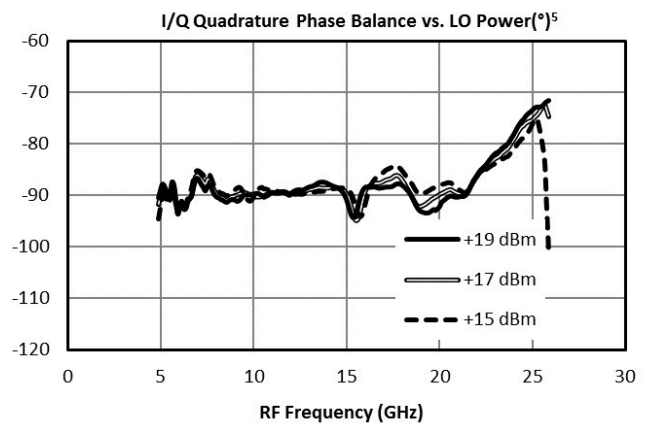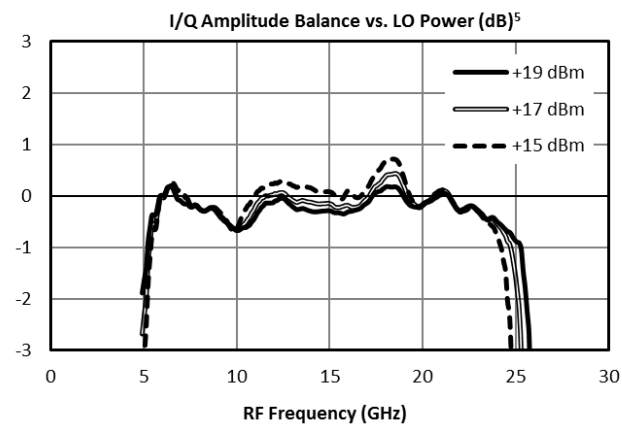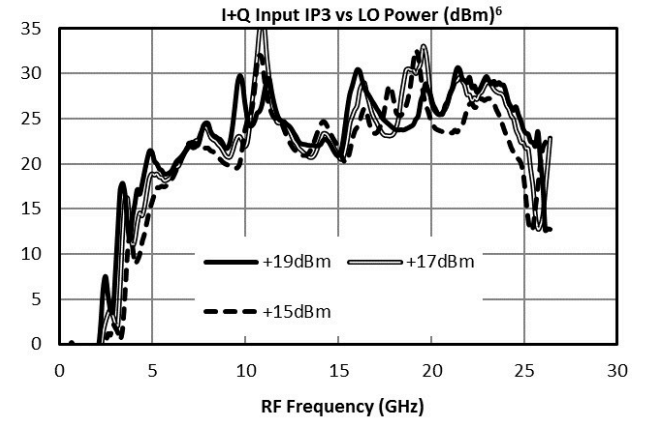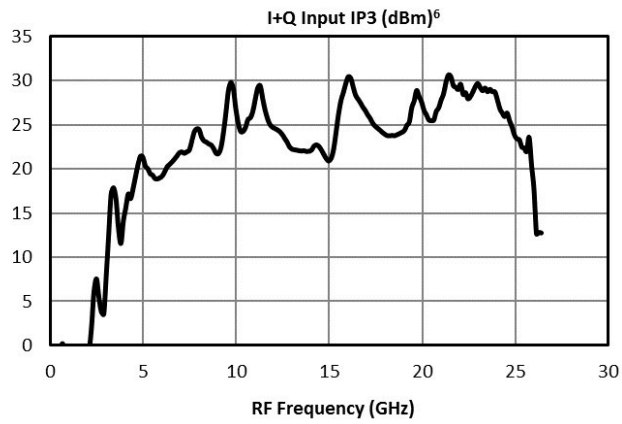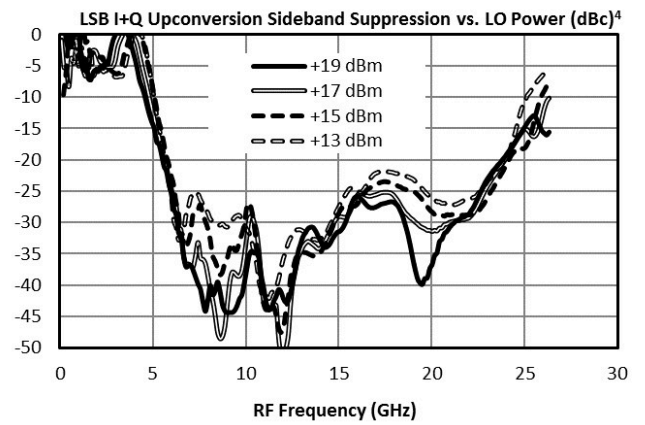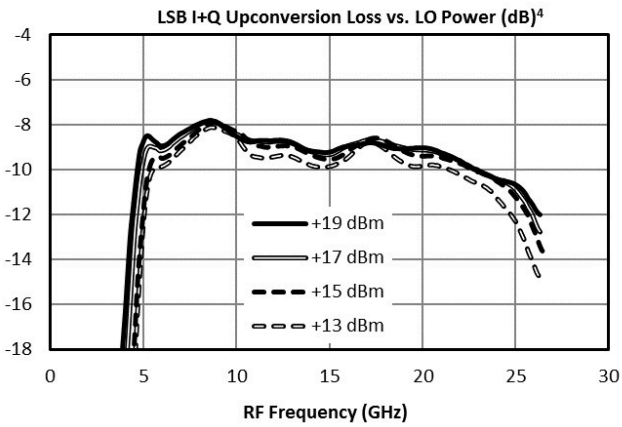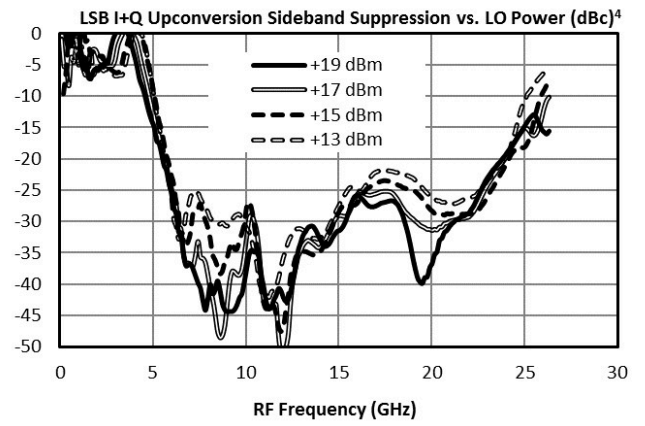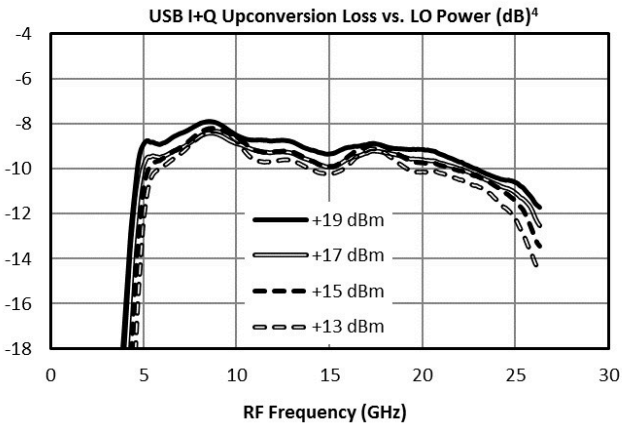

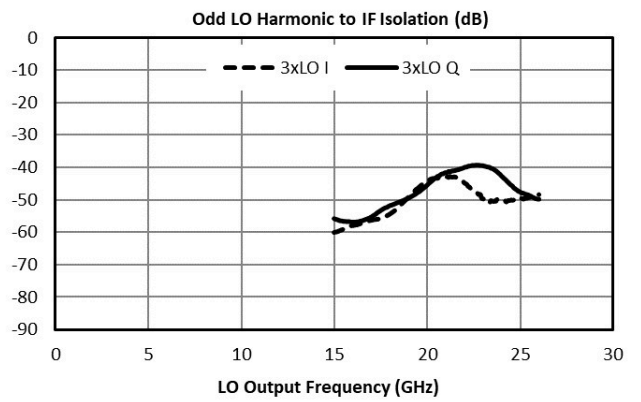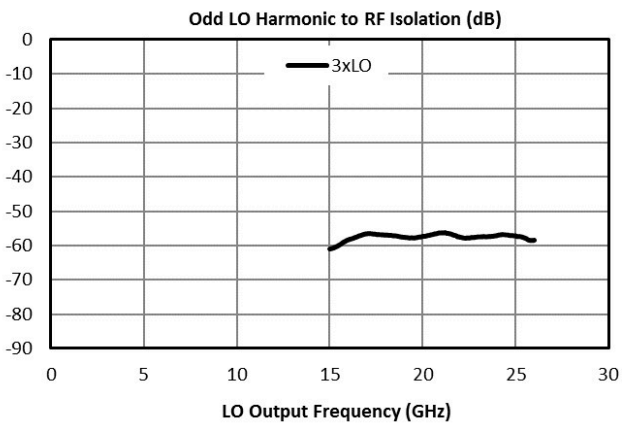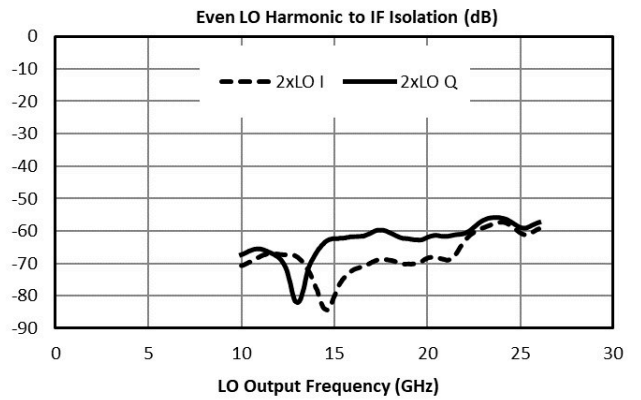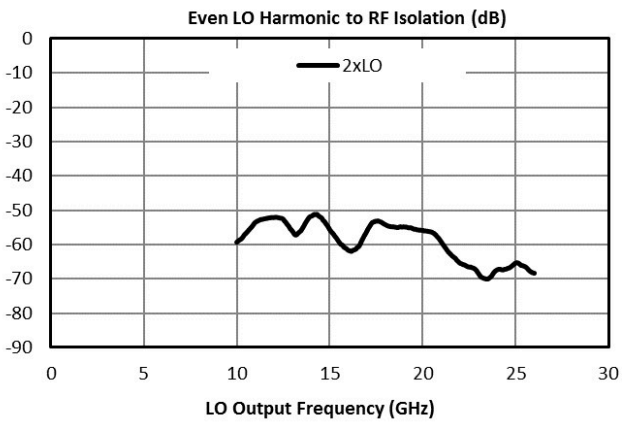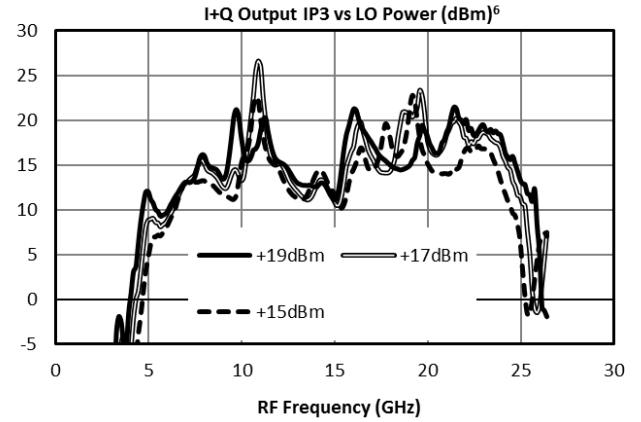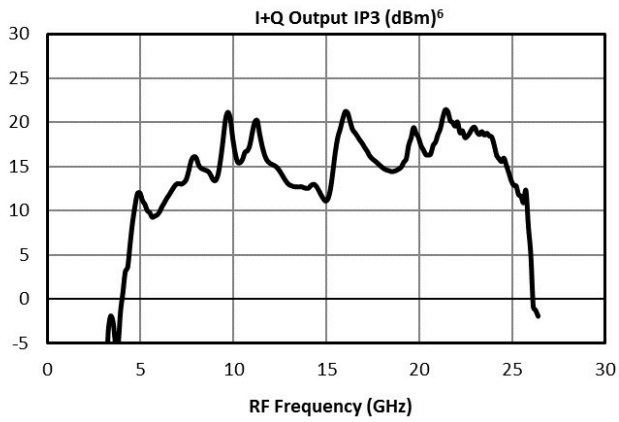

## Spur Table

### Typical Spurious Performance: Down-Conversion

Typical spurious data is provided by selecting RF and LO frequencies ( $\pm m \cdot LO \pm n \cdot RF$ ) within the RF/LO bands, to create a spurious output within the IF band. The mixer is swept across the full spurious band and the mean is calculated. The numbers shown in the table below are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by (n-1), where “n” is the RF spur order. For example, the 2RF x 2LO spur is 80 dBc for a -10 dBm input, so a -20 dBm RF input creates a spur that is (2-1) x (-10 dB) lower, or 90 dBc isolation.

Typical Down-conversion spurious suppression (dBc): Q Port (I Port)

| -10 dBm RF Input | 0xLO      | 1xLO      | 2xLO      | 3xLO      | 4xLO      | 5xLO      |
|------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| 0xRF             | -         | 49 (50)   | 60 (60)   | 57 (56)   | 74 (75)   | N/A       |
| 1xRF             | 33 (39)   | Reference | 47 (36)   | 60 (52)   | 51 (60)   | N/A       |
| 2xRF             | 73 (77)   | 54 (56)   | 80 (74)   | 63 (64)   | 79 (77)   | 78 (70)   |
| 3xRF             | 96 (95)   | 69 (69)   | 83 (86)   | 79 (81)   | 99 (99)   | 72 (74)   |
| 4xRF             | 131 (131) | 103 (109) | 119 (120) | 100 (110) | 122 (121) | 115 (115) |
| 5xRF             | N/A       | N/A       | 135 (137) | 131 (131) | 126 (134) | 131 (133) |

### Typical Spurious Performance: Up-Conversion


Typical spurious data is taken by mixing an input within the IF band, with LO frequencies ( $\pm m \cdot LO \pm n \cdot IF$ ), to create a spurious output within the RF output band. The mixer is swept across the full spurious output band and the mean is calculated. The numbers shown in the table below are for a -10 dBm IF input. Spurious suppression is scaled for different IF input power levels by  $(n-1)$ , where “n” is the IF spur order. For example, the  $2IF \times 1LO$  spur is typically 41 dBc for a -10 dBm input with a sine-wave LO, so a -20 dBm IF input creates a spur that is  $(2-1) \times (-10 \text{ dB})$  lower, or 51 dBc.

| -10 dBm IF Input | 0xLO      | 1xLO      | 2xLO      | 3xLO      | 4xLO      | 5xLO      |
|------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| 0xIF             | -         | 39 (44)   | 59 (59)   | 67 (67)   | 66 (66)   | N/A       |
| 1xIF             | 33 (39)   | Reference | 36 (33)   | 22 (26)   | 58 (49)   | N/A       |
| 2xIF             | 54 (55)   | 41 (41)   | 65 (66)   | 64 (56)   | 100 (101) | 89 (75)   |
| 3xIF             | 88 (85)   | 54 (55)   | 83 (84)   | 66 (59)   | 101 (91)  | 90 (84)   |
| 4xIF             | 112 (113) | 84 (84)   | 103 (107) | 95 (89)   | 110 (106) | 121 (104) |
| 5xIF             | 131 (132) | 108 (109) | 128 (129) | 104 (103) | 126 (127) | 125 (110) |

**Mechanical Data**

**Outline Drawing**

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

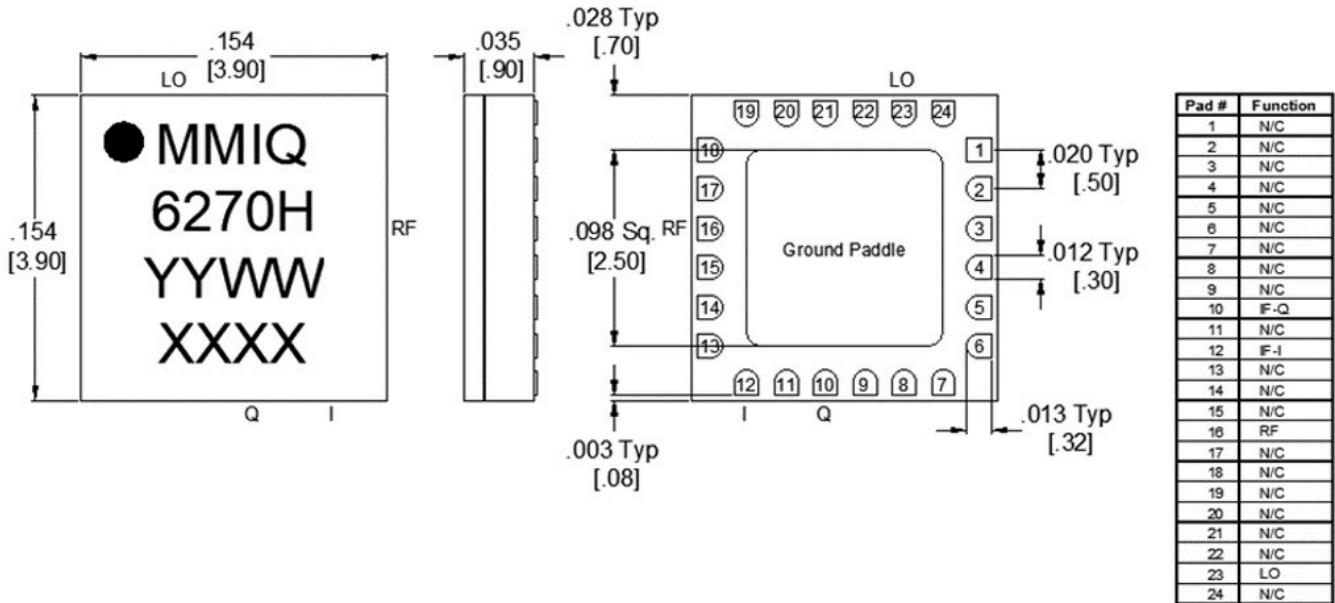


- Substrate material is ceramic.
- I/O Leads and Ground Paddle plating is (from base to finish):
 

|     |             |            |
|-----|-------------|------------|
| Ni: | 8.89um MAX  | 1.27um MIN |
| Pd: | 0.17um MAX  | 0.07um MIN |
| Au  | 0.254um MAX | 0.03um MIN |
- All unconnected pads should be connected to PCB RF ground.

**Footprint Image**


Download : [Footprint Drawing](#)

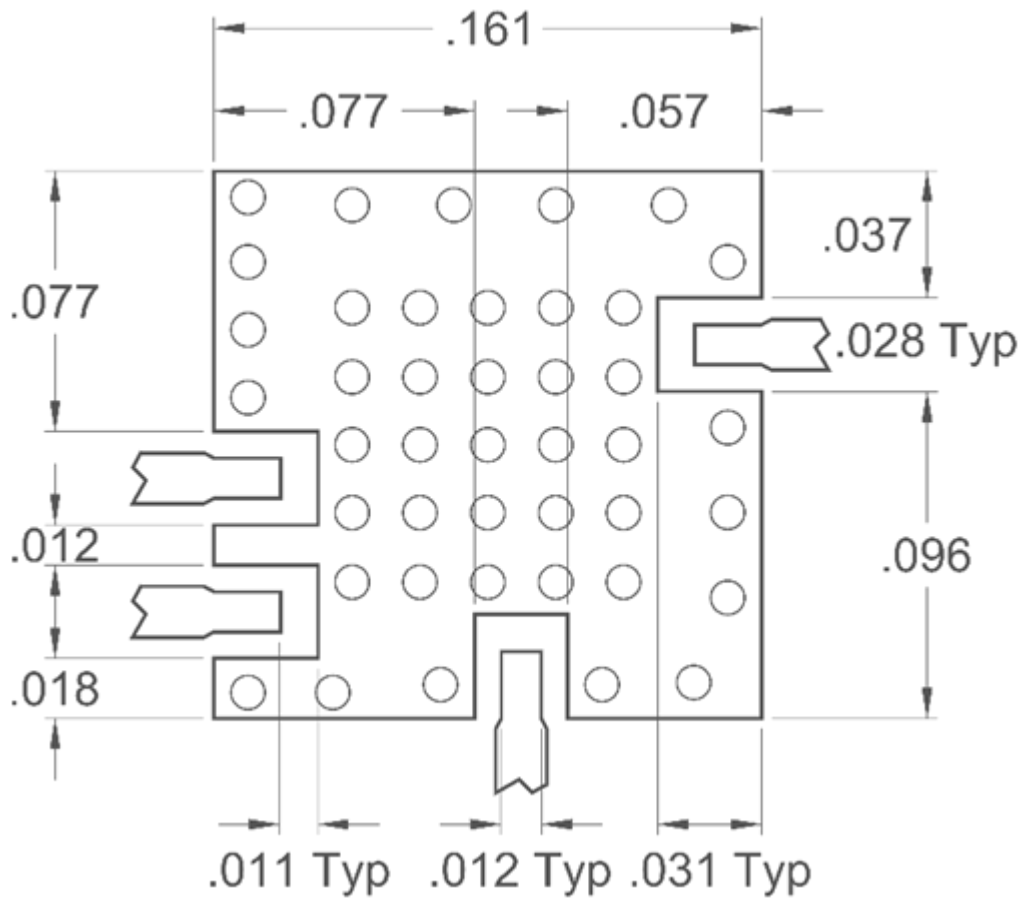

**Evaluation Board - Outline Drawing**

| Port | Connector Type |
|------|----------------|
| LO   | SMA Female     |
| RF   | SMA Female     |
| I/Q  | SMA Female     |

Note: Eval Connectors are not removeable.

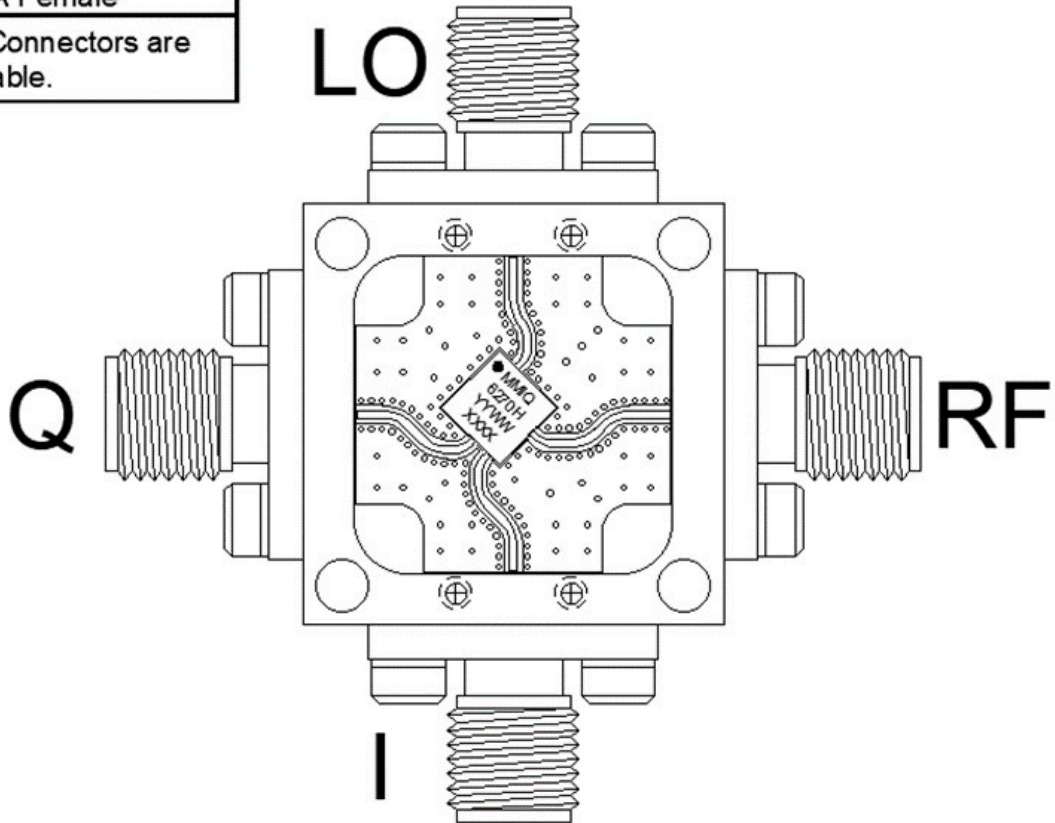

#### **DISCLAIMER**

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2018 - 2019, 2022, Marki Microwave, Inc