


# MBAL-0624PSM

## 6 - 24GHz MMIC Isolation Balun

### DEVICE OVERVIEW

#### General Description

The MBAL-0624PSM is a GaAs passive MMIC balun in a DFN surface mount package. This high isolation balun features excellent amplitude and phase balance across its 4 to 22 GHz frequency range and offers a 2:1 impedance ratio. The compact DFN package allows for extreme miniaturization of SMT footprints. The MBAL-0624PSM is an excellent choice for balanced amplifiers, clock distribution, and higher order Nyquist sampling in analog to digital converters.



[Download s-parameters here](#)


#### Features

- 2:1 Impedance Ratio
- 6 to 24 GHz (Balanced to Unbalanced Transformer)
- Insertion Loss as a Mode Converter, 1.7 dB Typical
- Common Mode Rejection, 28 dB Typical

#### Applications

- Test Equipment
- Electronic Warfare
- Radar and satellite communications
- High Channel Count Systems

#### Functional Block Diagram

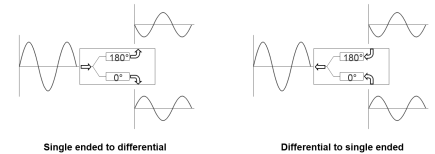

#### Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MBAL-0624PSM	6 - 24GHz MMIC Isolation Balun	DFN	REACH RoHS	Released	EAR99
EVB-MBAL-0624P	Evaluation Board, 6-24 GHz Passive MMIC DFN Package Balun	EVB	REACH RoHS	Released	EAR99

## Table Of Contents


- **Device Overview**
  - General Description
  - Features
  - Applications
  - Functional Block Diagram
- **Port Configuration and Functions**
  - Port Diagram
  - Port Functions
- **Revision History**
- **Specifications**
  - Absolute Maximum Ratings
  - Package Information
  - Electrical Specifications
  - Mixed Mode Scattering Parameters
  - Typical Performance Scattering Parameters
- **Mechanical Data**
  - Outline Drawing
- **Footprint Image**
- **Evaluation Board**
  - Evaluation Board Outline Drawing

## Revision History








Revision Code	Revision Date	Comment
-	2026-02-24	Initial Release

## Port Configuration and Functions

### Port Diagram

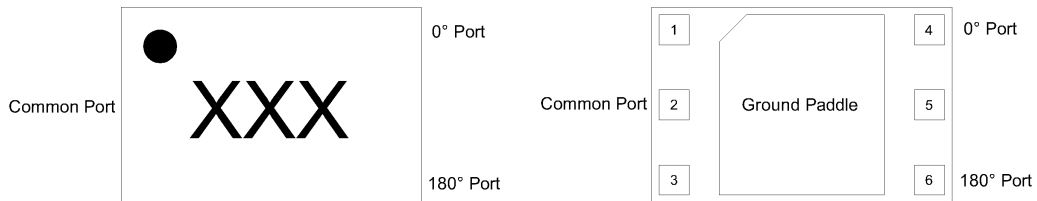

**Port Functions**

Port	Function	Description	DC Equivalent Circuit
Ground Paddle	Gnd	Ground paddle should be connected to RF ground	
Pin 1	Non-connect (NC)	Pin 1 is not connected internally and should be tied to RF ground.	
Pin 2	Common	Pin 2 is the common input port. It is DC open to ground.	
Pin 3	Non-connect (NC)	Pin 3 is not connected internally and should be tied to RF ground.	
Pin 4	Out 1 / 0° Port (Balanced)	Pin 4 is an output port. It is DC short to ground.	
Pin 5	Non-connect (NC)	Pin 5 is not connected internally and should be tied to RF ground.	
Pin 6	Out 2 / 180° Port (Balanced)	Pin 6 is an output port. It is DC short to ground.	

**Specifications**

**Absolute Maximum Ratings**

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C

**Package Information**







Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Dimensions	-	2.0 x 1.3 mm
Moisture Sensitivity Level	-	MSL 1

**Electrical Specifications**







The electrical specifications apply at TA=+25°C in a 50Ω system. Min and Max limits are guaranteed at TA=+25°C.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Insertion Loss as a Mode Converter	Configuration A, Temp = 25°C	6	24	-	1.7	-	dB
Nominal Phase Shift	Configuration A, Temp = 25°C	-	-	-	180	-	°
Common Port Return Loss	Configuration A, Temp = 25°C	6	24	-	14	-	dB
Common Mode Return Loss	Configuration A, Temp = 25°C	6	24	-	14	-	dB
Output Return Loss	Configuration A, Temp = 25°C	6	24	-	13	-	dB
Isolation	Configuration A, Temp = 25°C	6	24	-	19	-	dB
Amplitude Balance	Configuration A, Temp = 25°C	6	24	-	0.2	-	dB
Phase Balance	Configuration A, Temp = 25°C	6	24	-	3.5	-	°
Common Mode Rejection	Configuration A, Temp = 25°C	6	24	-	28	-	dB
Impedance	Configuration A, Temp = 25°C	-	-	-	50	-	Ω
Impedance Ratio	-	6	24	-	2:1	-	

**Mixed Mode Scattering Parameters**

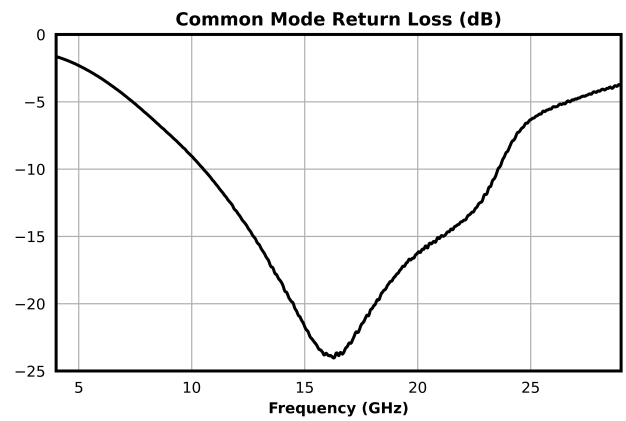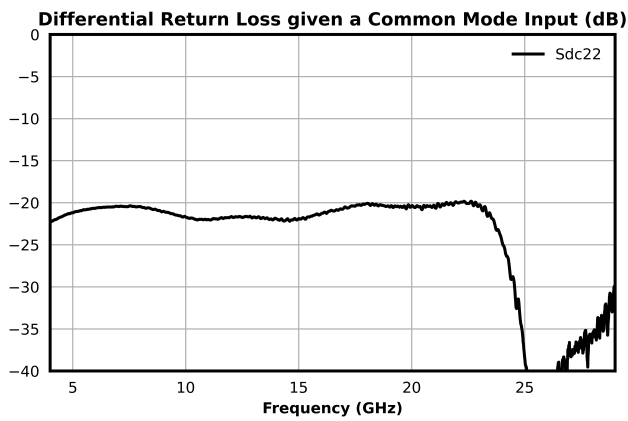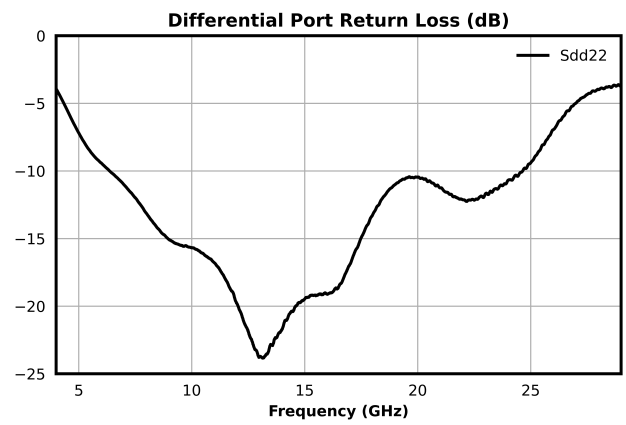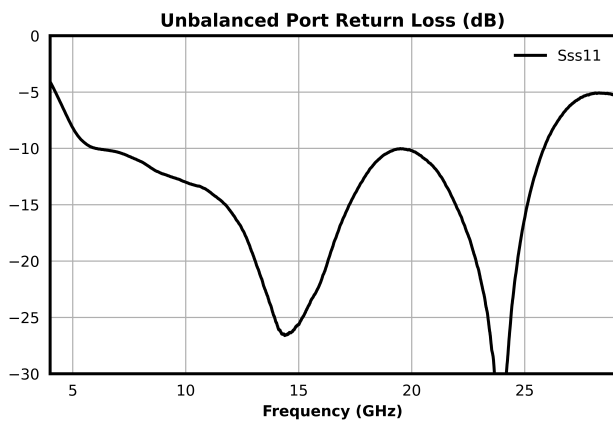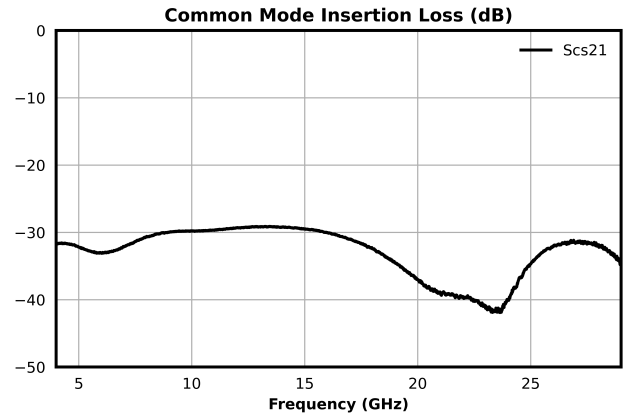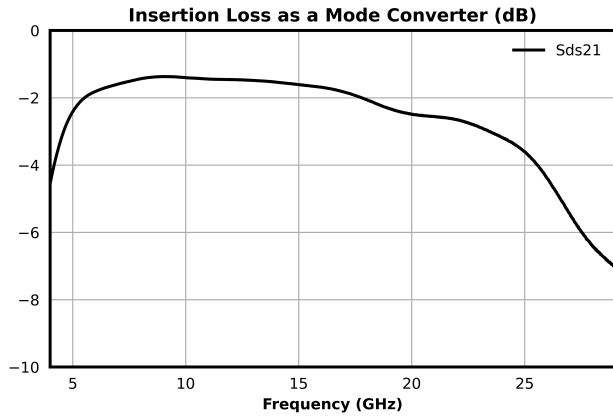

**Typical Performance Scattering Parameters**

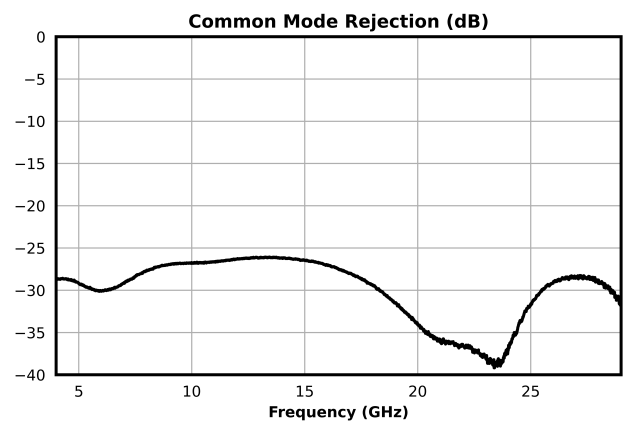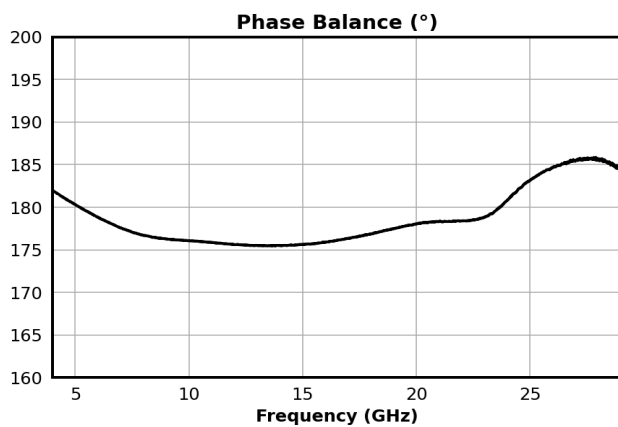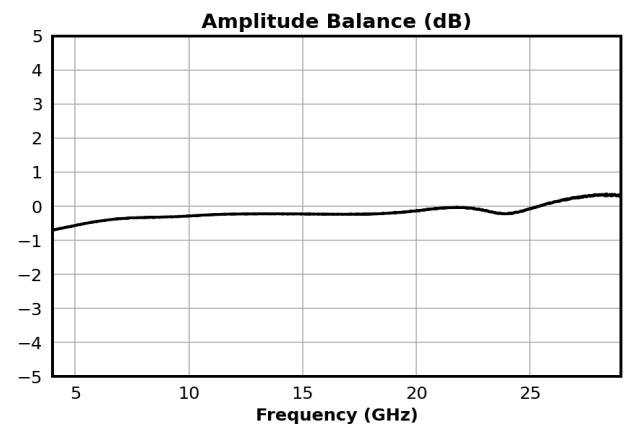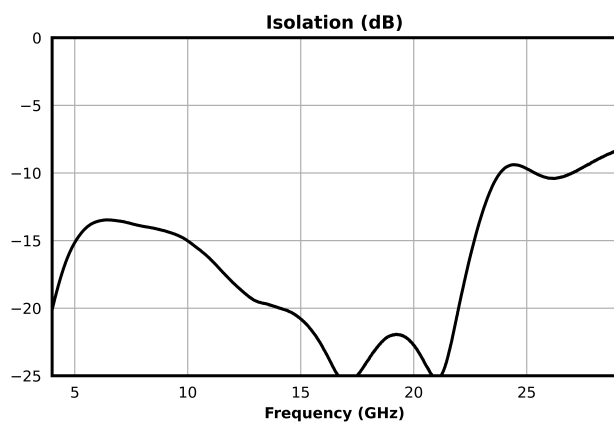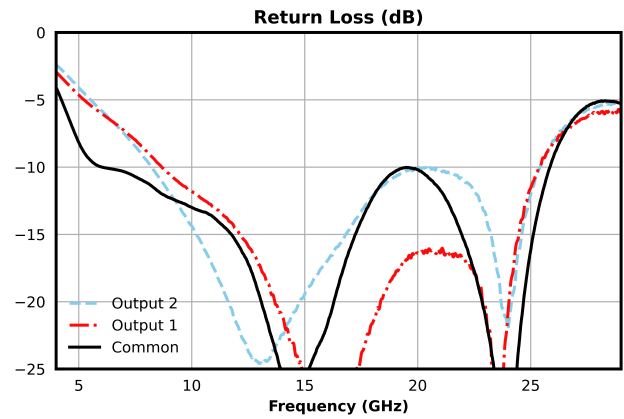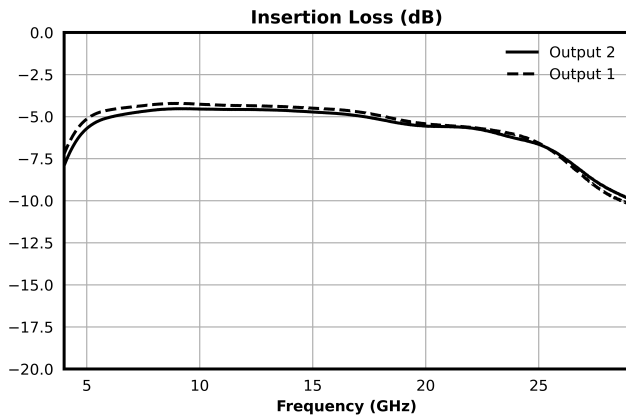


Measured data is de-embedded from fixture using AFR.




**Footprint Image**

Download : [Footprint Drawing](#)


**\*Units are in Inches**



Recommended to have the ground plane flooded. Ground plane are left to PCB designer's discretion.

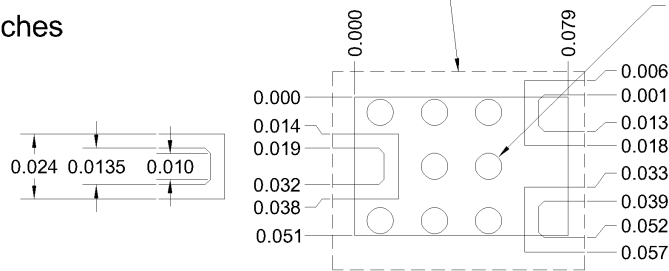

Ø0.010 Plated thru via. Recommended conductive or non-conductive fill, 8 PL. Vias can be added or reduced at PCB designer's discretion.

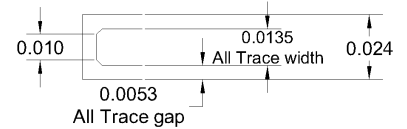



The landing pattern is to be used on Rogers 4003, 0.008" thick, 1/2 Oz Cu.

**Evaluation Board - Outline Drawing**

**All measurements are typical**

Port	Connector Type
RF in	2.92 mm F Edge Mount
RF out	2.92 mm F Edge Mount
RF out	2.92 mm F Edge Mount

Connectors are not removable

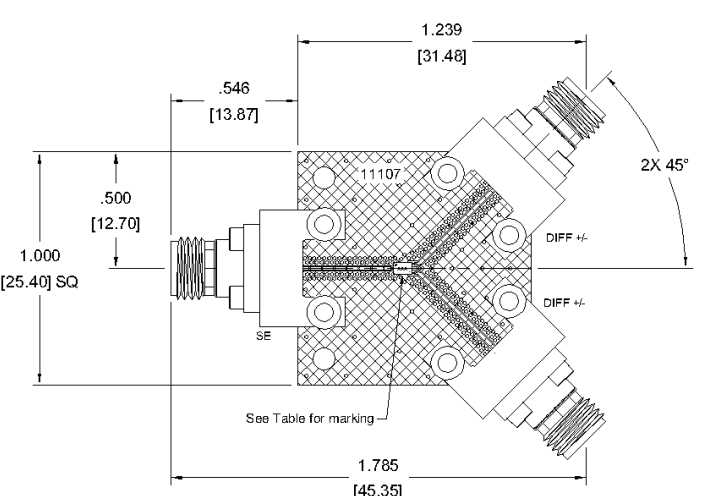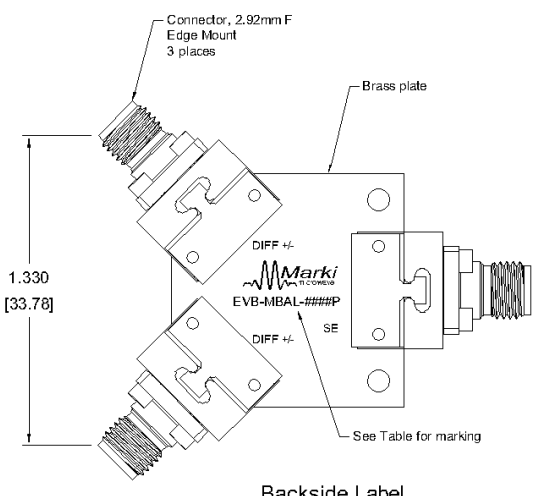**Backside Label**

EVB-MBAL-####P	Surface Mount PN	XXX
EVB-MBAL-0214P	MBAL-0214PSM	B0X
EVB-MBAL-0422P	MBAL-0422PSM	B1X
EVB-MBAL-0624P	MBAL-0624PSM	B2X

PROJECTION		REVISIONS			
INCH	(MM)	REV	DESCRIPTION	DATE	APPROVALS
		A	Initial Release	11/18/25	AT

NOTES:		Marki microwave		www.markimicrowave.com										
J1, 258 OF 15, 32 6P 25, 10 2 INCH 0.001 INCH 1 INCH 0.001 TOL. 0.001 INCH 10.000 2.00 0.02 0.05 0.10 +.002 .XX .02 -.001 .XX .010		<table border="1"> <thead> <tr> <th>DRAWN BY</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td>Tnn</td> <td>09/22/2025</td> </tr> <tr> <td>AR</td> <td>11/17/25</td> </tr> <tr> <td>AN</td> <td>11/17/25</td> </tr> </tbody> </table>	DRAWN BY	DATE	Tnn	09/22/2025	AR	11/17/25	AN	11/17/25	<b>Outline, MBAL PSM Eval Board</b>			
DRAWN BY	DATE													
Tnn	09/22/2025													
AR	11/17/25													
AN	11/17/25													
MATERIAL: FINISH:		<table border="1"> <thead> <tr> <th>SIZE</th> <th>CAGE CODE</th> <th>DWG. NO.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>0UC32</td> <td>EVB-MBAL-####P</td> </tr> </tbody> </table>	SIZE	CAGE CODE	DWG. NO.	A	0UC32	EVB-MBAL-####P	SHEET 1 OF 1					
SIZE	CAGE CODE	DWG. NO.												
A	0UC32	EVB-MBAL-####P												

Proprietary: This document was originated by and is the property of Marki Microwave. Unauthorized disclosure is prohibited.

**DO NOT SCALE DRAWING**

**DISCLAIMER**

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2026, Marki Microwave, LLC