


# IQ-0618MXP

## Quadrature-If Double-Balanced Mixers

### DEVICE OVERVIEW

#### General Description

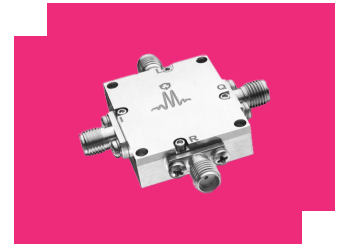The IQ-0618 is a passive IQ mixer. This broadband mixer spans 6 to 18 GHz on the RF and LO ports with an IF from DC to 500 MHz. Up to 23 dB of image rejection is available due to the excellent phase and amplitude balance of its LO quadrature hybrid. IQ series mixers have generally been replaced with MMIQ mixers with superior performance, repeatability, and availability. IQ series mixers are still used in legacy systems and are suitable for laboratory use.




#### Features

- LO/RF 6.0 to 18.0 GHz
- IF DC to 500 MHz
- 7.5 dB Typical Conversion Loss
- 35 dB Typical LO to RF Isolation
- 3 Degree Typical Quadrature Phase Deviation
- .4 dB Typical Amplitude Deviation

#### Applications

N/A
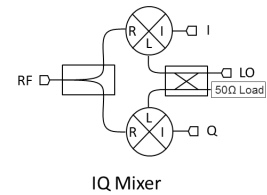
#### Functional Block Diagram



#### Part Ordering Options

| Part Number       | Description                          | Package | Connectors      | Green Status | Product Lifecycle              | Export Classification | Recommended Replacement |
|-------------------|--------------------------------------|---------|-----------------|--------------|--------------------------------|-----------------------|-------------------------|
| <u>IQ-0618LXP</u> | Quadrature-If Double-Balanced Mixers | XP      | <u>Standard</u> | Non-RoHS     | Not Recommended for New Design | EAR99                 | -                       |
| IQ-0618MXP        | Quadrature-If Double-Balanced Mixers | XP      | <u>Standard</u> | Non-RoHS     | Not Recommended for New Design | EAR99                 | -                       |

## Table Of Contents

- **Device Overview**

- General Description
- Features
- Applications
- Functional Block Diagram

- **Port Configuration and Functions**

- Port Functions

- **Specifications**

- Package Information
- Recommended Operating Conditions
- Electrical Specifications
- Typical Performance Plots

- **Mechanical Data**






- Outline Drawing

- **Notes**

NOT RECOMMENDED FOR NEW DESIGN

**Port Configuration and Functions**

**Port Functions**

| Port | Function          | Connector Type | Description  | Equivalent Circuit for Package   |
|------|-------------------|----------------|--|--|
| GND  | Ground            | -              | XP package ground taken through metal housing.   | <b>GND</b>  |
| I    | I Input / Output  | SMAF           | I port is diode coupled and AC matched to 50Ω over the specified I port frequency range. |             |
| LO   | LO Input          | SMAF           | LO port is DC short and AC matched to 50Ω over the specified LO frequency range.         |             |
| Q    | Q Input / Output  | SMAF           | Q port is diode coupled and AC matched to 50Ω over the specified Q port frequency range. |             |
| RF   | RF Input / Output | SMAF           | RF port is DC short and AC matched to 50Ω over the specified RF frequency range.         |            |

NOT RECOMMENDED FOR NEW DESIGN

**Specifications**

**Package Information**

| Parameter  | Details          | Rating           |
|------------|------------------|------------------|
| Weight     | Package name: XP | 30g              |
| Dimensions | -                | 20.32 x 20.32 mm |

**Recommended Operating Conditions**

| Parameter      | Min | Nominal | Max | Unit |
|----------------|-----|---------|-----|------|
| LO Input Power | 13  | -       | 16  | -    |

NOT RECOMMENDED FOR NEW DESIGN

**Electrical Specifications**

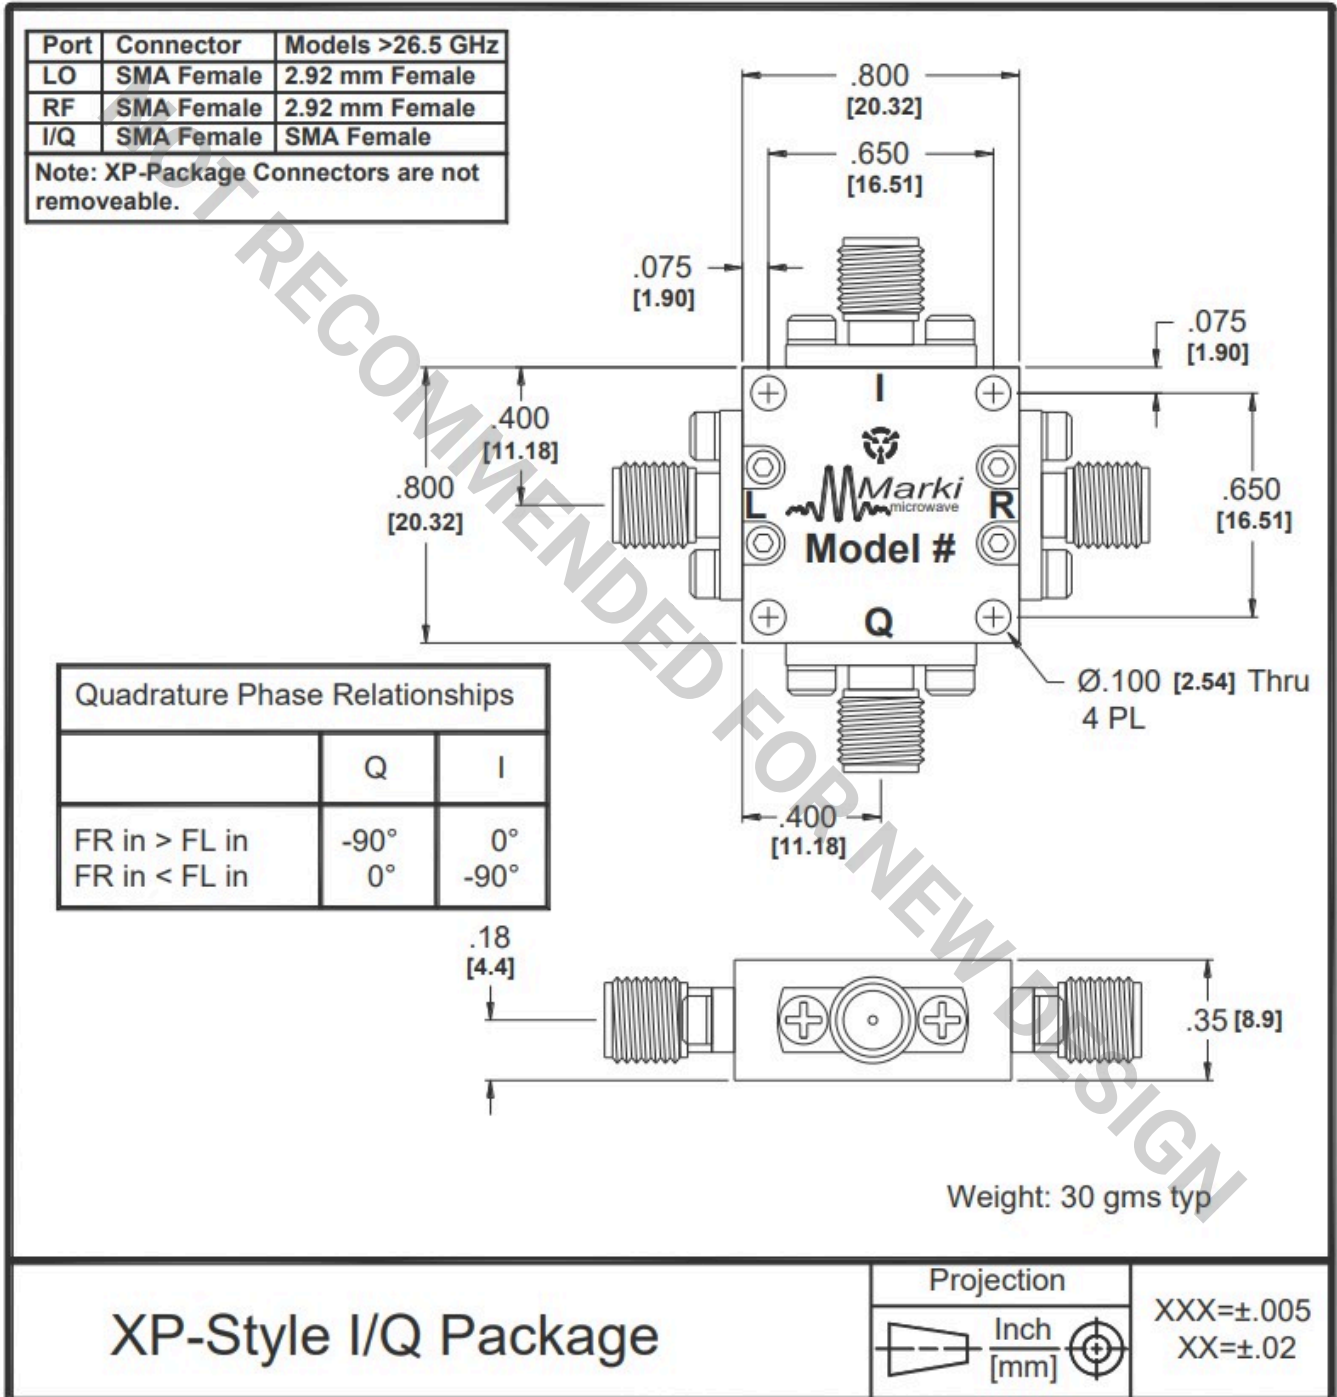
Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system.

| Parameter                      | Test Conditions  | Minimum Frequency (GHz) | Maximum Frequency (GHz) | Min | Typ | Max | Unit |
|--------------------------------|--|-------------------------|-------------------------|-----|-----|-----|------|
| Conversion Loss                | LO/RF=6-18 GHz<br>IF=DC-.5 GHz                             | 6                       | 18                      | -   | 7.5 | 9   | dB   |
| Image Rejection                | LO/RF=6-18 GHz<br>IF=DC-.5 GHz                             | 6                       | 18                      | 14  | 23  | -   | dB   |
| Image Rejection                | LO/RF=8-18 GHz<br>IF=DC-.5 GHz                             | 8                       | 18                      | 16  | 23  | -   | dB   |
| Input 1 dB Compression         | LO/RF=6-18 GHz<br>LO drive level, M Diode Option=13-16 dBm | 6                       | 18                      | -   | 6   | -   | dBm  |
| Input IP3                      | LO/RF=6-18 GHz<br>LO drive level, M Diode Option=13-16 dBm | 6                       | 18                      | -   | 16  | -   | dBm  |
| I/Q Amplitude Deviation        | LO/RF=6-18 GHz<br>IF=DC-.5 GHz                             | 6                       | 18                      | -   | 0.4 | -   | dB   |
| I/Q Quadrature Phase Deviation | LO/RF=6-18 GHz<br>IF=DC-.5 GHz                             | 6                       | 18                      | -   | 3   | -   | dB   |
| Isolation, LO to IF            | LO/RF=6-18 GHz   | 6                       | 18                      | -   | 20  | -   | dB   |
| Isolation, LO to RF            | LO/RF=6-18 GHz   | 6                       | 18                      | 25  | 35  | -   | dB   |
| Isolation, RF to IF            | LO/RF=6-18 GHz   | 6                       | 18                      | -   | 20  | -   | dB   |
| IF Frequency Range             | -  | -                       | -                       | 0   | -   | 0.5 | GHz  |
| RF Frequency Range             | -  | -                       | -                       | 6   | -   | 18  | GHz  |

**Mechanical Data**

**Outline Drawing**

Download : [Outline 2D Drawing](#)



## Notes

1. Mixer Conversion Loss Plot IF frequency is 70 MHz.
2. Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.
3. Conversion Loss typically degrades less than 0.5 dB for LO drives 2 dB below the lowest and 3 dB above highest nominal LO drive levels.
4. Conversion Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
5. Maximum input power is +26 dBm at +25°C, derated linearly to +23 dBm at +100°C.
6. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
7. Catalog mixer circuits are continually improved. Configuration control requires custom mixer model numbers and specifications.

## DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2022 - 2025, Marki Microwave, Inc