


MMD-2050LSM

GaAs MMIC Millimeter Wave Doubler

DEVICE OVERVIEW

General Description

The MMD-2050LSM is a MMIC millimeter wave doubler fabricated with GaAs Schottky diodes. This operates over a guaranteed 10 to 25 GHz input frequency range or a doubled output frequency range of 20 to 50 GHz. It features excellent conversion loss, superior isolations, and high harmonic suppressions across a broad bandwidth. Both surface mount QFN and evaluation boards are available.




Features

- Low input drive
- High fundamental rejection
- Millimeter wave output frequencies
- RoHS Compliant

Applications

- High frequency synthesis
- LO signal chain

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MMD-2050LSM	GaAs MMIC Millimeter Wave Doubler	QFN	REACH RoHS	Released	EAR99
EVAL-MMD-2050L	Evaluation Board, GaAs MMIC 20 - 50 GHz Millimeter Wave Doubler	EVAL	REACH RoHS	Released	EAR99

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Recommended Operating Conditions
 - Electrical Specifications
 - Typical Performance Plots
- **Mechanical Data**
 - Outline Drawing
- **Footprint Image**
- **Evaluation Board**
 - Evaluation Board Outline Drawing


Revision History

Revision Code	Revision Date	Comment
-	2019-11-01	Datasheet Initial Release
A	2020-01-01	Updated Landing Pattern




Port Configuration and Functions

Port Diagram

A bottom-up view of the MMD-2050LSM outline drawing is shown below. The MMD-2050L should only be used in the forward direction, with the input and output ports given in Port Functions.

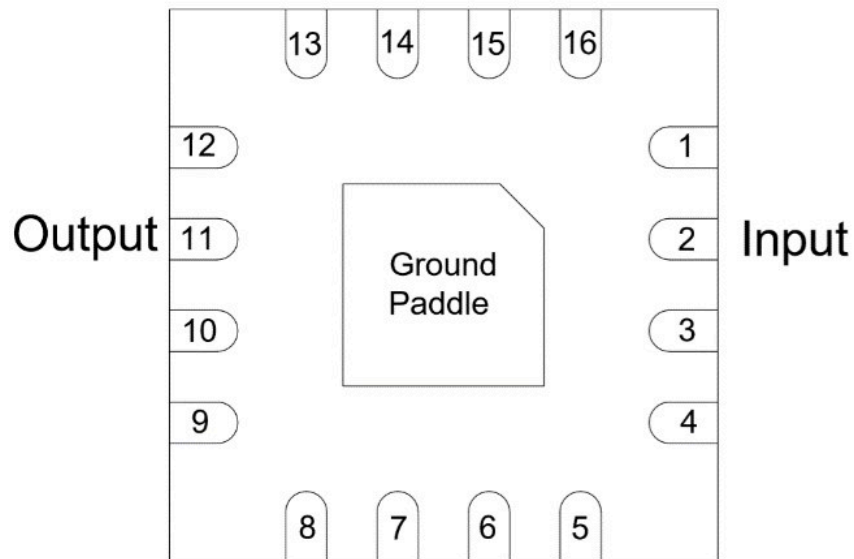

Port Functions

Port	Function	Description	DC Equivalent Circuit
GND	Ground	SM package ground path is provided through the ground paddle.	
Pin 11	2F Output	Pin 11 is DC open and AC matched to 50 Ohms from 20-50GHz.	
Pin 2	1F Input	Pin 2 is diode coupled and AC matched to 50 Ohms from 10-25GHz.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Dimensions	-	3 x 3 mm
Moisture Sensitivity Level	-	MSL 1

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Ambient Temperature	-55	25	100	°C
Input Power	5	-	10	dBm

Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the EVAL package doubler used in the forward direction with a +7 dBm sine wave input.


Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Conversion Loss ¹	Second Harmonic Output	-	-	-	12.5	15	dB
Input Frequency Range	-	-	-	10	-	25	GHz
Input Power	-	-	-	5	-	10	dBm
Isolation, 1F ²	Input = 10 - 25 GHz Output = 10 - 25 GHz	-	-	-	47	-	dB
Isolation, 3F ³	Input = 10 - 17 GHz Output = 30 - 51 GHz	-	-	-	58	-	dB
Isolation, 4F ⁴	Input = 10 - 12.5 GHz Output = 40 - 50 GHz	-	-	-	26	-	dB
Output Frequency Range	-	-	-	20	-	50	GHz
Suppression, 1F ⁵	Input = 10 - 25 GHz Output = 10 - 25 GHz	-	-	-	34.5	-	dBc
Suppression, 3F ⁶	Input = 10 - 17 GHz Output = 30 - 51 GHz	-	-	-	46	-	dBc
Suppression, 4F ⁷	Input = 10 - 12.5 GHz Output = 40 - 50 GHz	-	-	-	14	-	dBc





[1][5][6][7] Suppressions and isolations measured with an input source with >60dBc (relative to fundamental input) harmonic suppression. Suppression is defined as the harmonic power relative to the 2F doubled output power.

[2][3][4] Isolation is defined as the harmonic power relative to the 1F fundamental input power.

All typical performance data includes fixturing losses from the EVAL package. The actual DUT performs better than the displayed results, especially as the frequency increases.

Typical Performance Plots

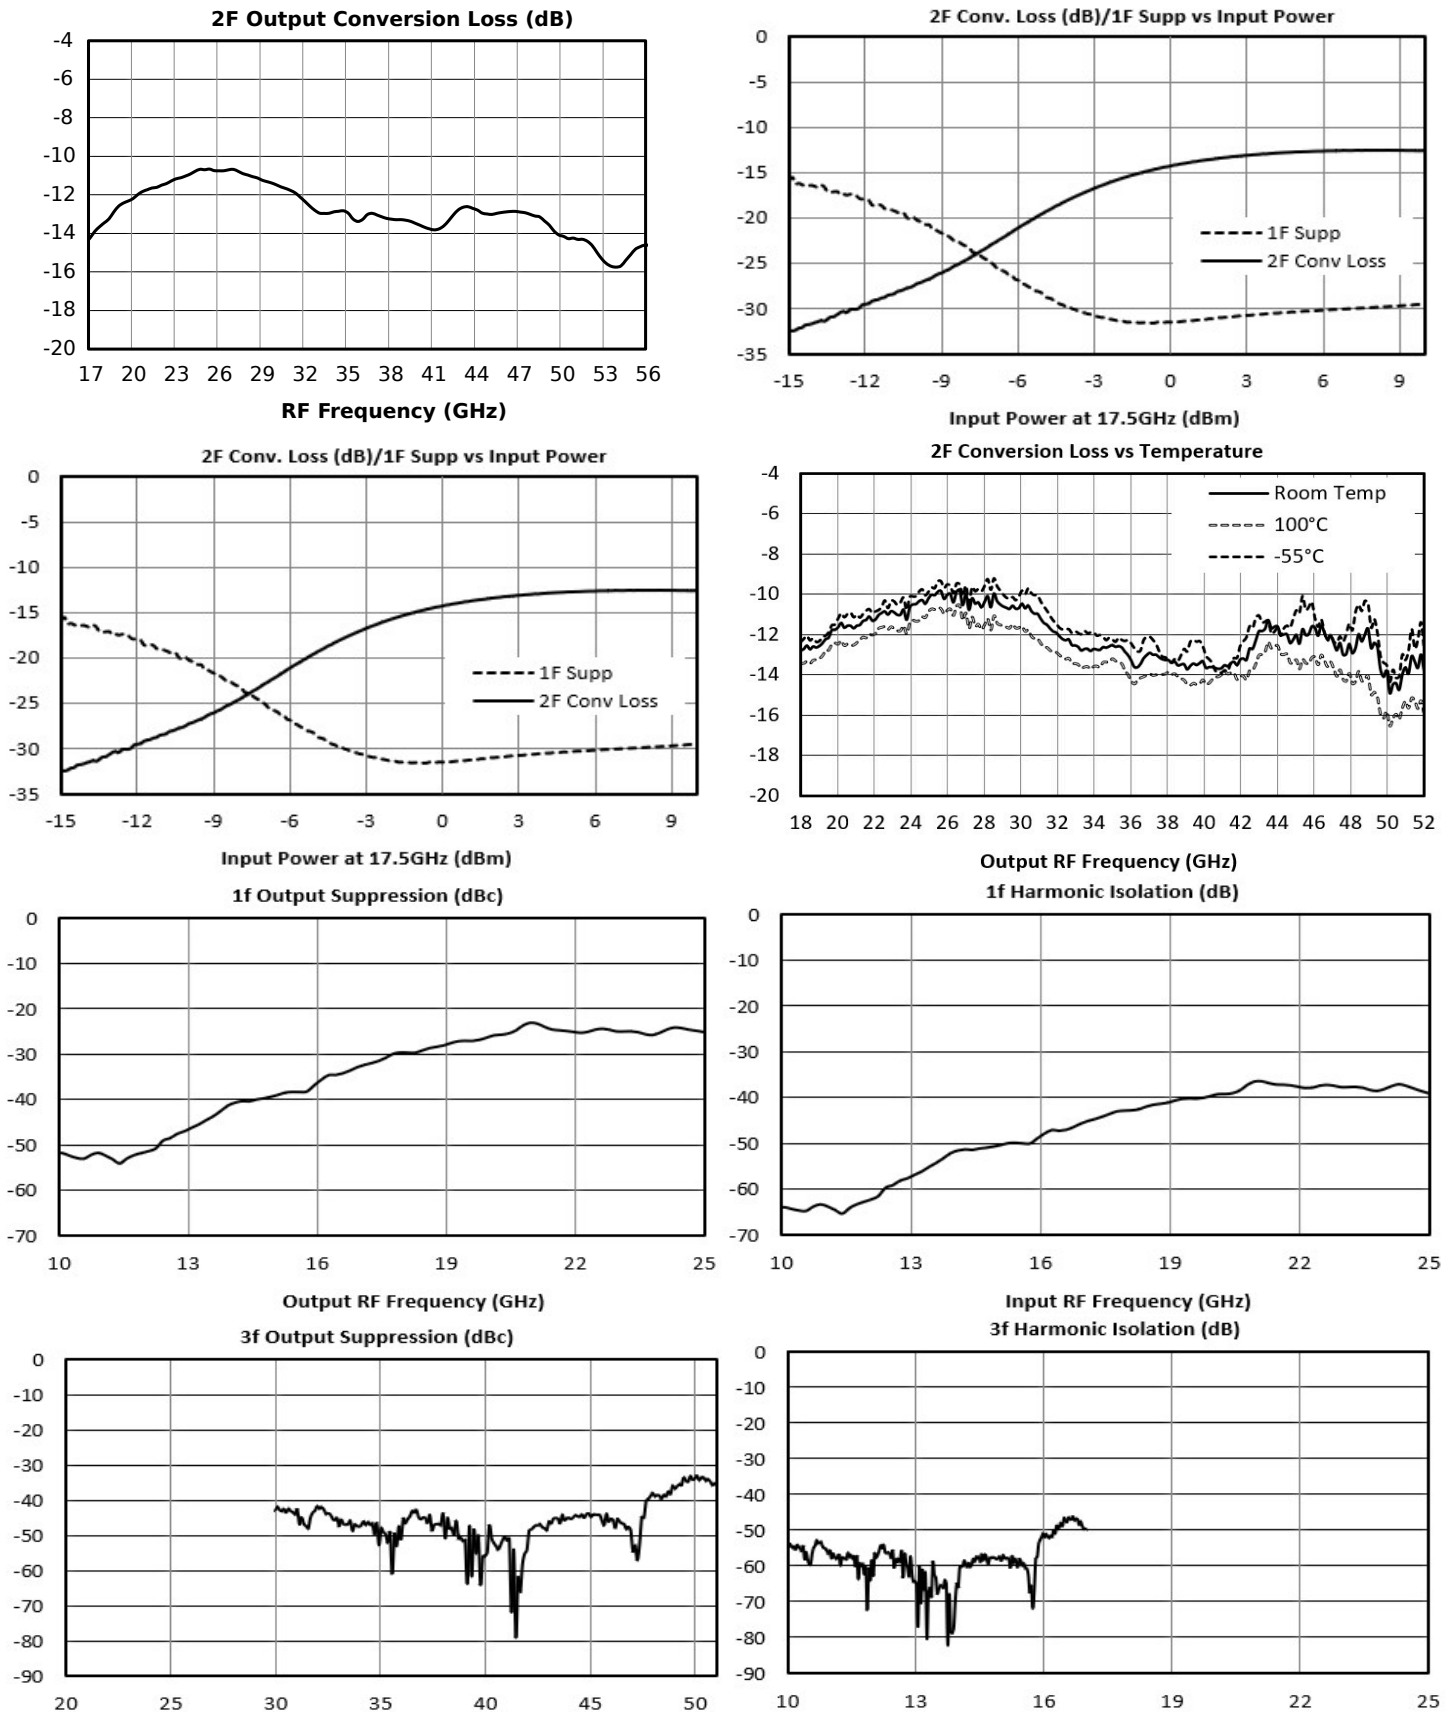

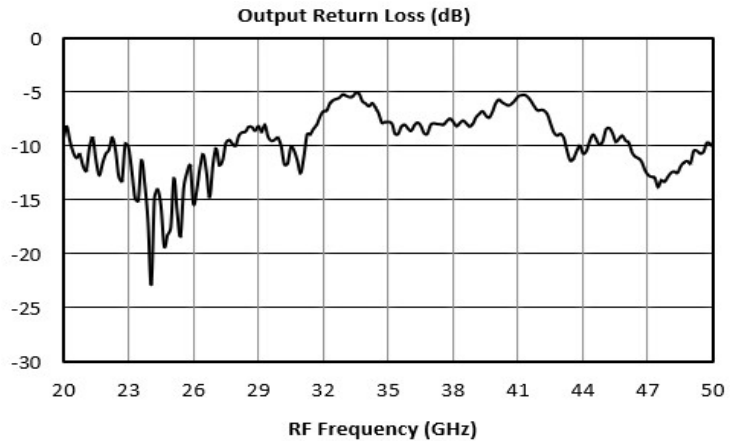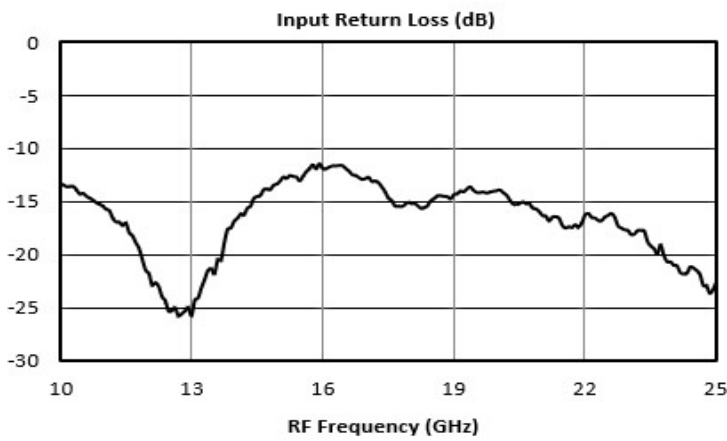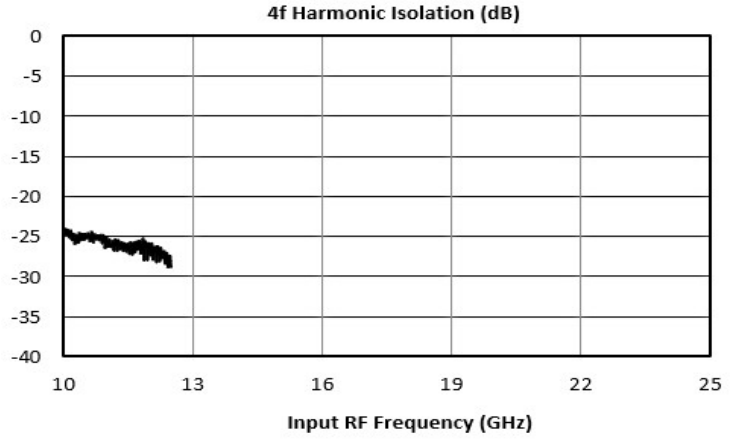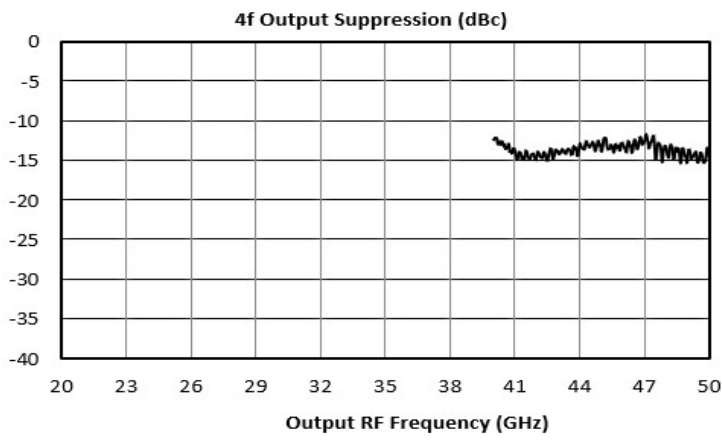


Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

Pin #	Config A
1	N/C
2	Input
3	N/C
4	N/C
5	N/C
6	N/C
7	N/C
8	N/C
9	N/C
10	N/C
11	Output
12	N/C
13	N/C
14	N/C
15	N/C
16	N/C

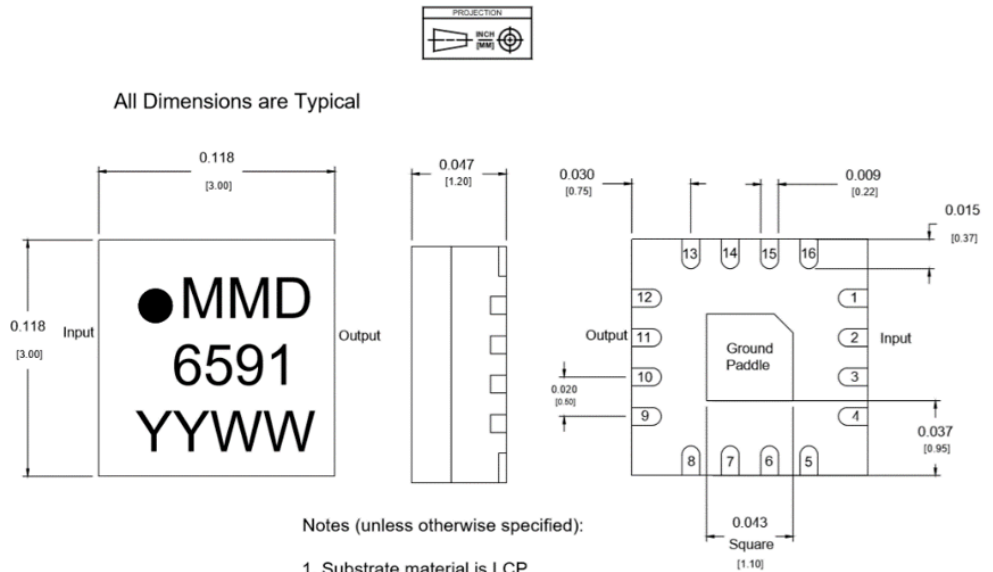


Notes (unless otherwise specified):


- Substrate material is LCP
- I/O Leads and Die Paddle is (from base to finish):
Ni: 0.5um MIN
Pd: 0.02um MIN
Au: 0.05um MAX
- All unconnected pins should be connected to PCB RF ground.

Footprint Image

Download : [Footprint Drawing](#)

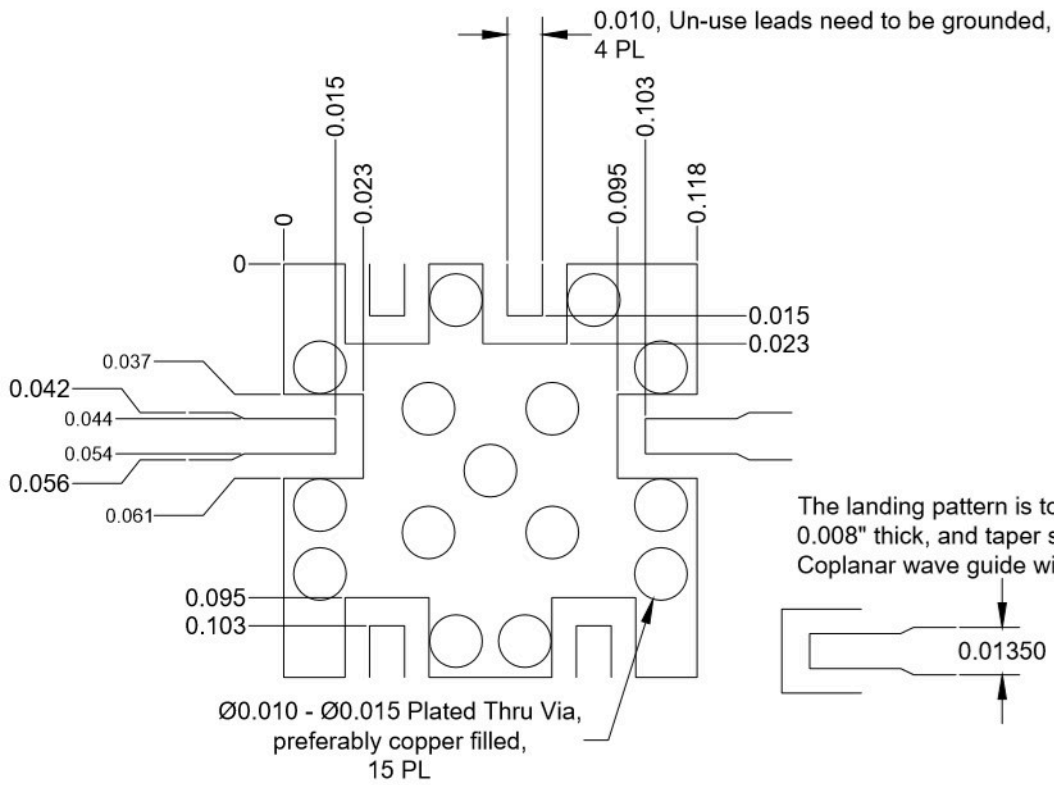

Evaluation Board - Outline Drawing


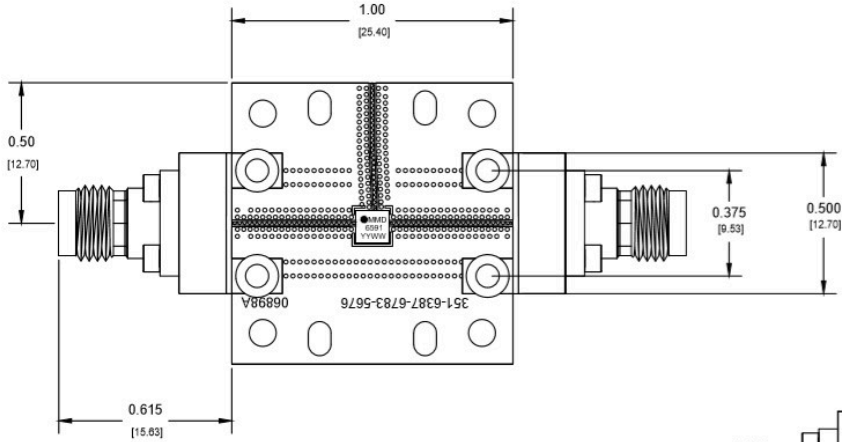


All measurements are typical

Port	Connector Type	Port	DC Voltage
F	2.40mm Female	F	0.253 V
2F	2.40mm Female	2F	DC Open

Note: Connectors are not removable on EVAL board

Backside Label

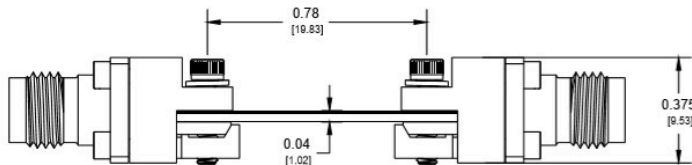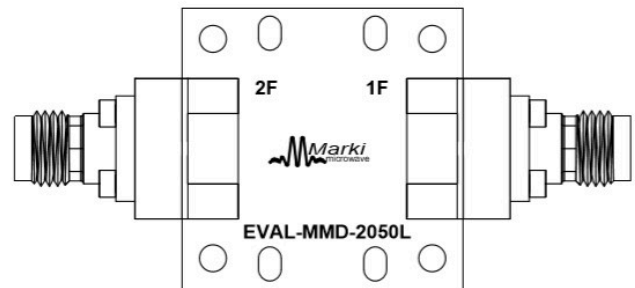

DISCLAIMER

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2019 - 2020, Marki Microwave, LLC