


BT-0014SMG-2

Miniature Surface-Mount 0.0005 - 14 GHz Bias-Tee

DEVICE OVERVIEW

General Description

The BT-0014SMG is a packaged bias tee featuring excellent insertion loss and superior isolations over a broad 500 kHz to 14 GHz bandwidth. Tight fabrication tolerances allow for low unit to unit variation enabling accurate simulations using the provided s3p file taken from measured production units. The bias tee is available in a compact package and is suitable for applications such as amplifier biasing, diode biasing and DC level shifting.




Features

- Frequency Range: 500 kHz to 14 GHz
- Frequency Range with External Coil: 5 kHz to 14 GHz
- DC Current 500 mA
- Miniature Surface Mount Package
- Lead Free Assembly
- Reflow Solderable

Applications

- Test and Measurement Equipment

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
BT-0014SMG-2	Miniature Surface-Mount 0.0005 - 14 GHz Bias-Tee	SMG	RoHS REACH	Obsolete	EAR99
<u>BT-0014SMG-1</u>	Miniature Surface-Mount 0.0005 - 14 GHz Bias-Tee	SMG	REACH RoHS	Obsolete	EAR99

BT-0014SMG-2

Miniature Surface-Mount 0.0005 - 14 GHz Bias-Tee

Table Of Contents


- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Electrical Specifications
 - Typical Performance Plots
 - Typical Performance vs Bias Current at Low frequencies
- **Mechanical Data**
 - Outline Drawing
- **Footprint Image**

Revision History




Revision Code	Revision Date	Comment
D	2020-10-01	Bias Current plots added
E	2021-10-01	EOL

Port Configuration and Functions

Port Diagram

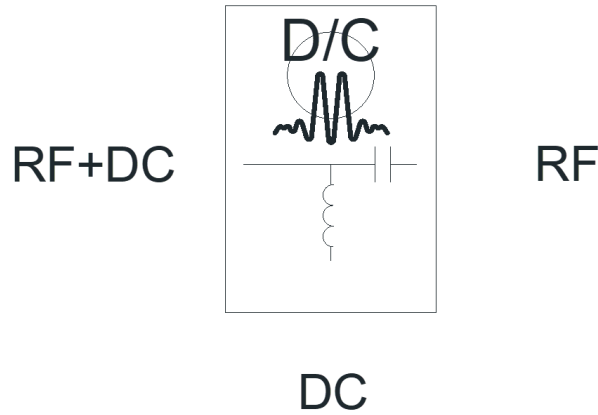

Port Functions

Port	Function	Description	DC Equivalent Circuit
Common	RF+DC	This port is DC blocked to the RF port and DC connected to the DC port through an internal RF choke.	
DC	DC	This port is internally connected to an RF choke which is Dc connected to the RF+DC port and DC blocked to the RF port.	
RF	RF	This port is internally DC blocked to the RF+DC and DC ports.	

BT-0014SMG-2

Miniature Surface-Mount 0.0005 - 14 GHz Bias-Tee

Specifications

Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
DC Current	0.5	A
DC Voltage	30	V
Maximum Storage Temperature	125	°C
Minimum Storage Temperature	-65	°C
RF Power Handling	1	W

Package Information

Parameter	Details	Rating
Dimensions	-	3.81 x 6.10 mm
Moisture Sensitivity Level	-	MSL 3

OBSOLETE

BT-0014SMG-2

Miniature Surface-Mount 0.0005 - 14 GHz Bias-Tee

Electrical Specifications

Specifications guaranteed at +25C, measured in a 50-Ohm system




Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
DC Port Isolation	-	0.0005	14	-	40	-	dB
DC Resistance	-	0.0005	14	-	1.5	-	Ω
Insertion Loss	-	0.005	14	-	0.5	1.5	dB
Insertion Loss	-	0.0005	0.005	-	1	6	dB

OBSOLETE

BT-0014SMG-2




Miniature Surface-Mount 0.0005 - 14 GHz Bias-Tee

Typical Performance Plots

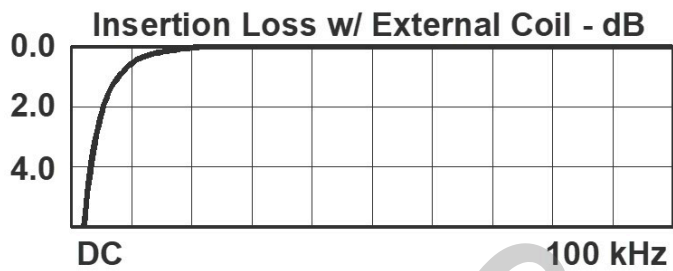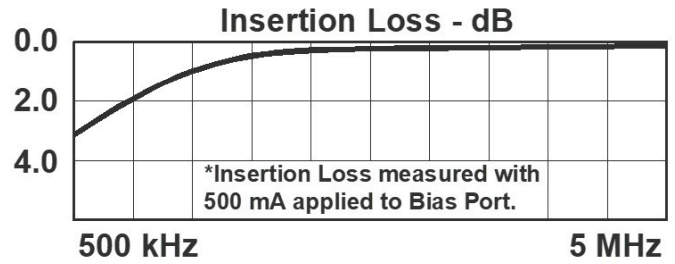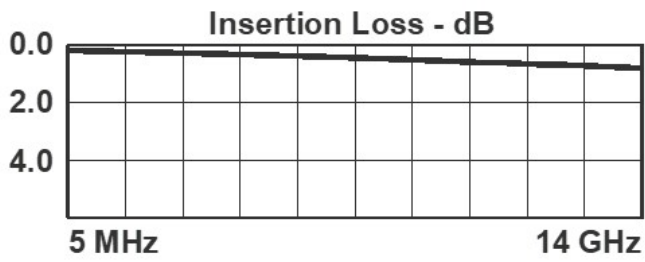

OBSOLETE


Typical Performance vs Bias Current at Low frequencies

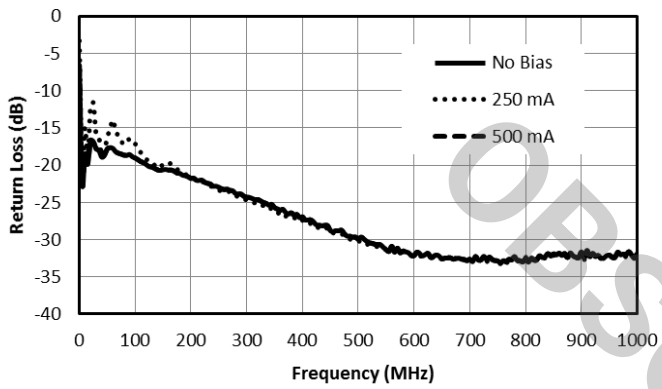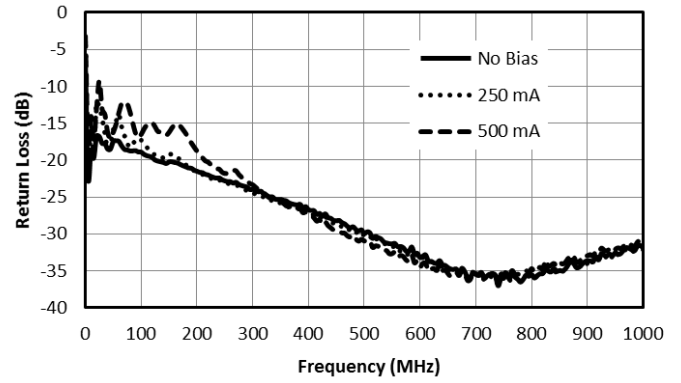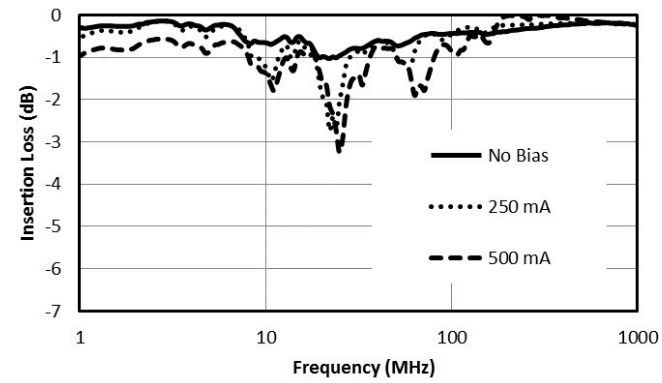

Mechanical Data

Outline Drawing

Download : [Outline 3D Drawing](#) | [Outline 3D STP](#)

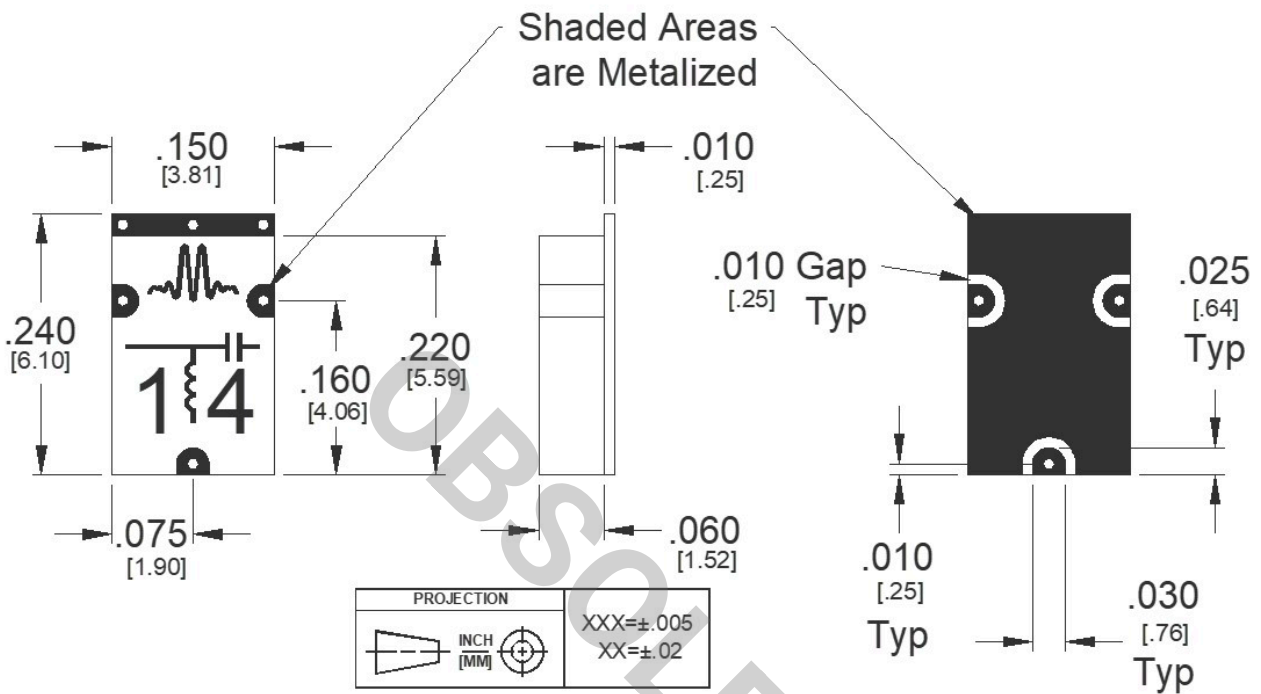

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2020 - 2021, Marki Microwave, Inc

OBSOLETE