


ML1-0110LSM-2

Microlithic™ Double-Balanced Mixer

DEVICE OVERVIEW

General Description

The ML1-0110SM is a Surface Mount Microlithic™ double balanced mixer. As with all Microlithic™ mixers, it features excellent conversion loss, isolation, and spurious performance across a broad bandwidth and in a miniaturized form factor. Accurate, nonlinear software models are available for Microwave Office through the Marki Microwave PDK. The ML1-0110SM is a lead free, RoHS compliant package compatible with standard leaded and lead-free solder reflows. SMA connectorized evaluation packages are available. The ML1-0110SM is an excellent alternative to Marki Microwave M1 and M3 mixers packaged in surface mount packages such as the EZ package.




Features

- Compact SMT Style Package (0.152" x 0.090"x0.045")
- CAD Optimized for Superior Isolation and Spurious Response
- Broadband Performance
- Excellent Unit-to-Unit Repeatability
- Fully nonlinear software models available with Marki PDK for Microwave Office
- RoHS Compliant

Applications

N/A

Functional Block Diagram

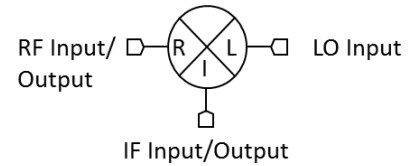

Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification	Recommended Replacement
ML1-0110SSM-2	Microlithic™ Double-Balanced Mixer	SMT	REACH RoHS	Obsolete	EAR99	-
ML1-0110LSM-2	Microlithic™ Double-Balanced Mixer	SMT	REACH RoHS	End of Life	EAR99	-
ML1-0110HSM-1	Microlithic™ Double-Balanced Mixer	SMT	REACH RoHS	End of Life	EAR99	-
ML1-0110HSM-2	Microlithic™ Double-Balanced Mixer	SMT	REACH RoHS	End of Life	EAR99	-
ML1-0110LSM-1	Microlithic™ Double-Balanced Mixer	SMT	REACH RoHS	End of Life	EAR99	-
ML1-0110SSM-1	Microlithic™ Double-Balanced Mixer	SMT	REACH RoHS	Obsolete	EAR99	-
EVAL-ML1-0110S	Evaluation Board, Microlithic™ Double-Balanced 1.5 - 10 GHz Mixer	EVAL	REACH RoHS	Obsolete	EAR99	-




Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification	Recommended Replacement
EVAL-ML1-0110S	Evaluation Board, Microlithic™ Double-Balanced 1.5 - 10 GHz Mixer	EVAL	REACH RoHS	Obsolete	EAR99	-
EVAL-ML1-0110L	Evaluation Board, Microlithic Double-balanced 1.5 - 10 GHz Mixer	EVAL	REACH RoHS	End of Life	EAR99	-
EVAL-ML1-0110H	Evaluation Board, Microlithic™ Double-Balanced Mixer	EVAL	REACH RoHS	End of Life	EAR99	-

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Functions
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Electrical Specifications
 - Typical Performance Plots
 - Spur Tables
- **Mechanical Data**
 - Outline Drawing
- **Footprint Image**
- **Evaluation Board**
- **Notes**

Port Configuration and Functions

Port Functions

Port	Function	Description	Equivalent Circuit for Package
IF	IF Input/Output	The IF port is DC coupled to the diodes. Blocking capacitor is optional.	
LO	LO Input	The LO port is DC short to ground and AC matched to 50 Ohms from 1.5 to 10 GHz. Blocking capacitor is optional.	
RF	RF Input / Output	The RF port is DC short to ground and AC matched to 50 Ohms from 1.5 to 10 GHz. Blocking capacitor is optional.	

END OF LIFE

Specifications

Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
IF DC Current	50	mA
LO DC Current	1	Amp
Maximum Operating Temperature	-55	°C
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Storage Temperature	-65	°C
RF DC Current	1	Amp
RF Power Handling (RF+LO), 100°C	20	dBm
RF Power Handling (RF+LO), 25°C	25	dBm

Package Information

Parameter	Details	Rating
Dimensions	-	3.86x2.29mm
Moisture Sensitivity Level	-	MSL 1

END OF LIFE









Electrical Specifications









Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.




Parameter	Test Conditions	Min	Typ	Max	Unit
Conversion Loss	LO/RF=1.5-10 GHz ID=1-2 GHz	-	9	11	dB
Conversion Loss	LO/RF=1.5-10 GHz ID=DC-1 GHz	-	7	10	dB
Input 1 dB Compression	LO/RF=1.5-10 GHz LO drive level, L Diode Option=8-13 dBm	-	3	-	dBm
Input IP3	LO/RF=1.5-10 GHz LO drive level, L Diode Option=8-13 dBm	-	12	-	dBm

END OF LIFE

Typical Performance Plots

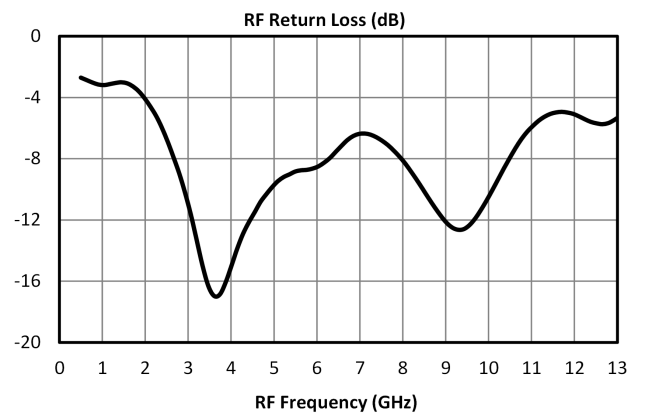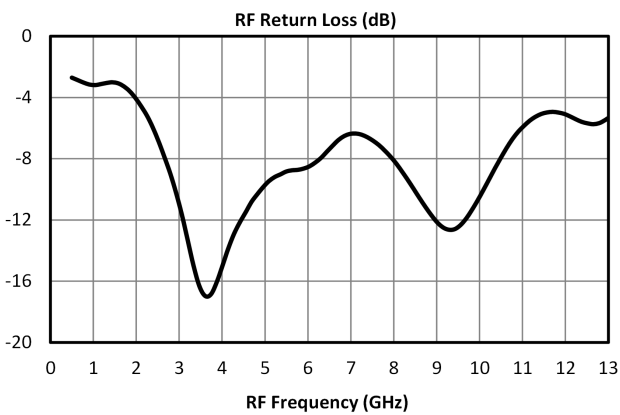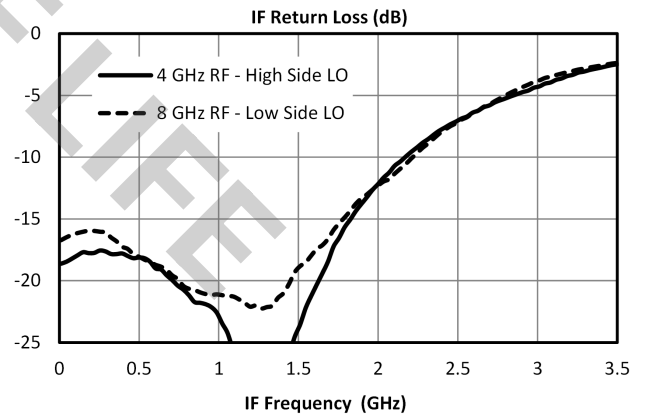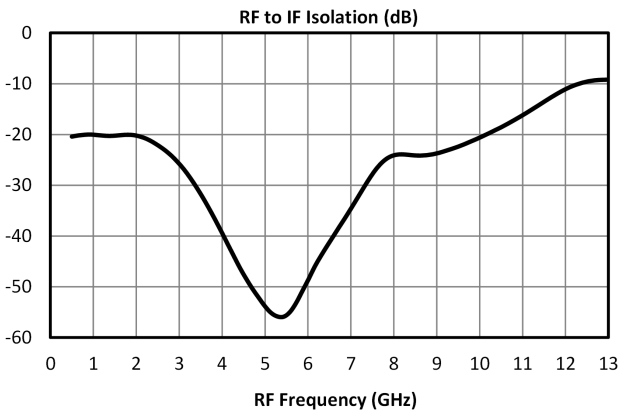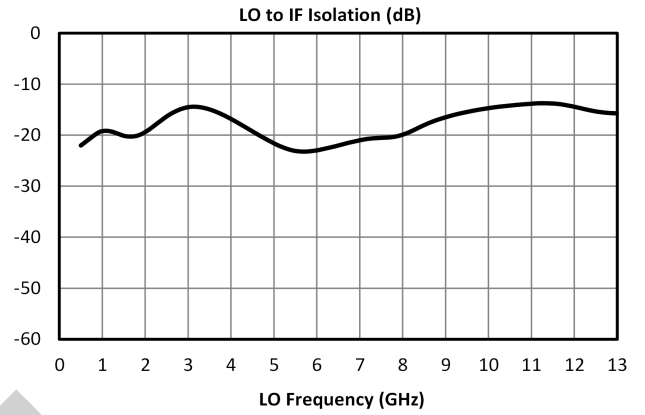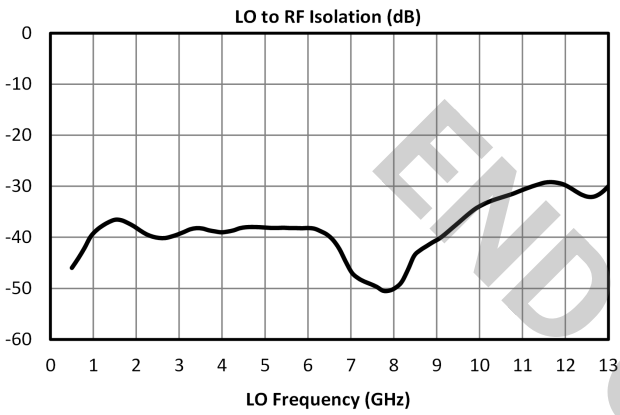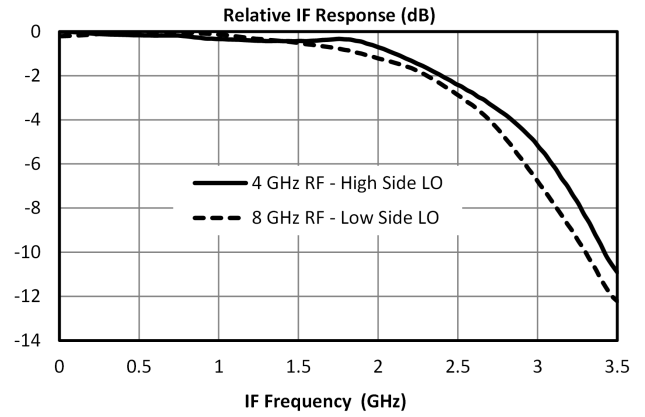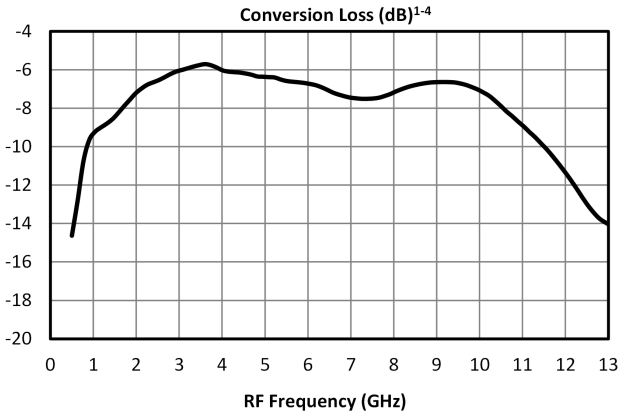

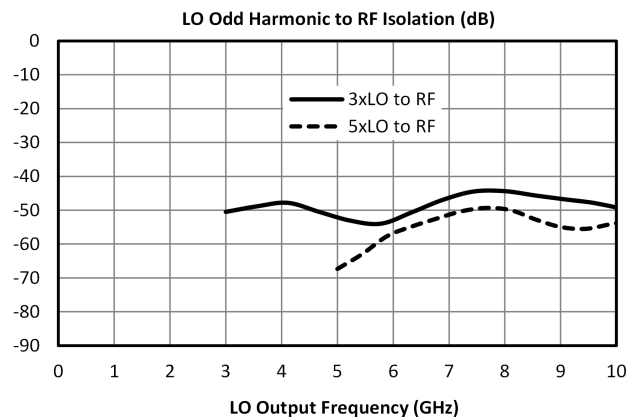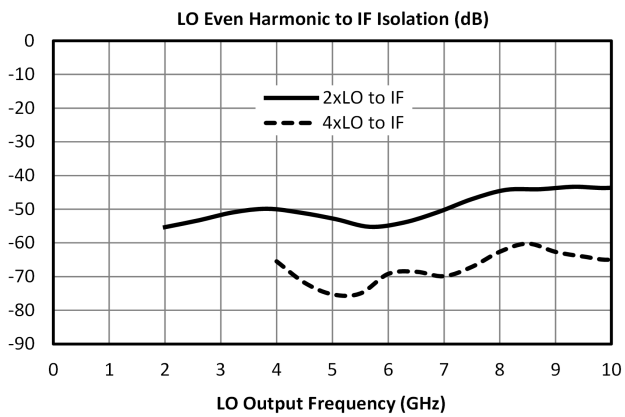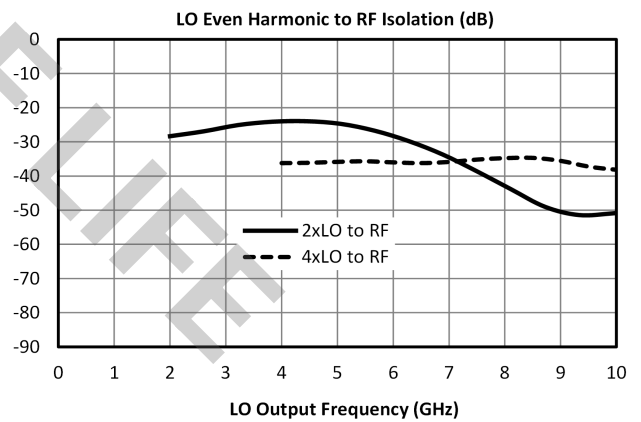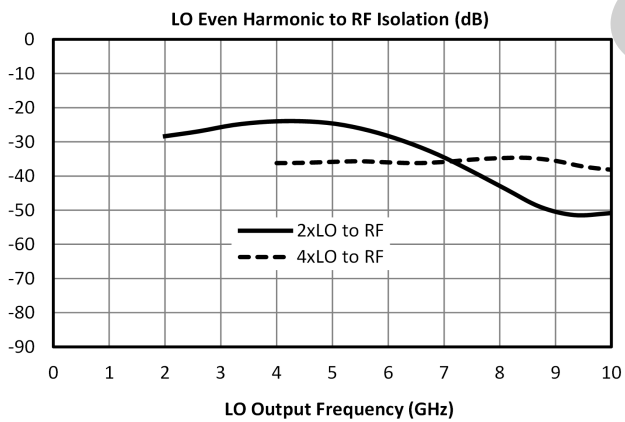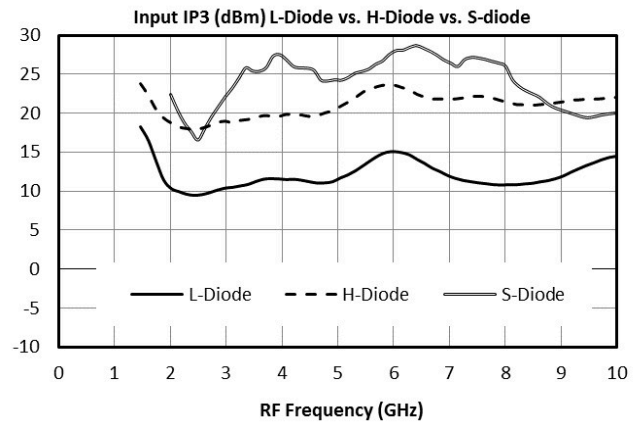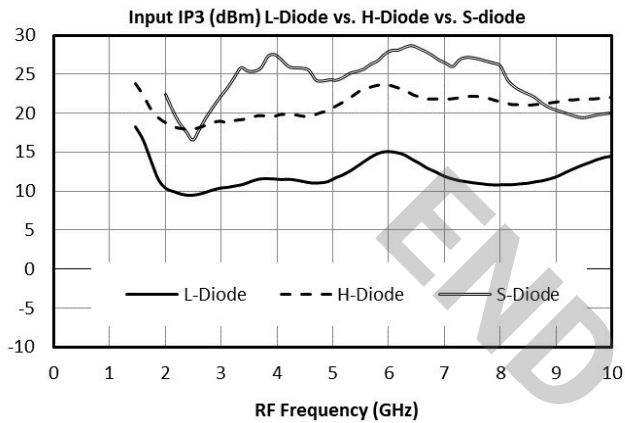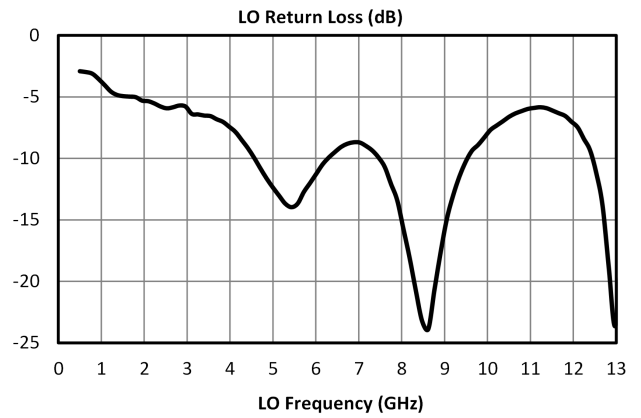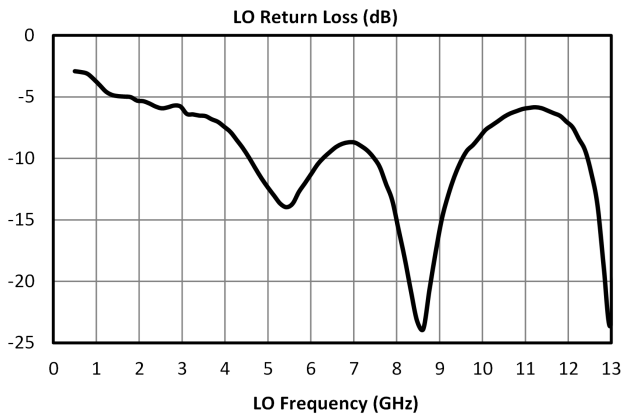

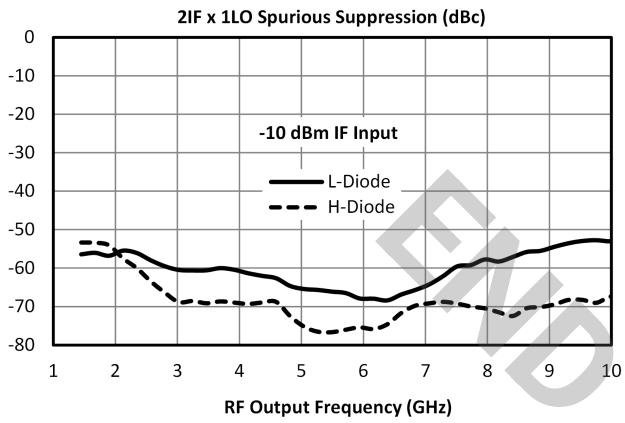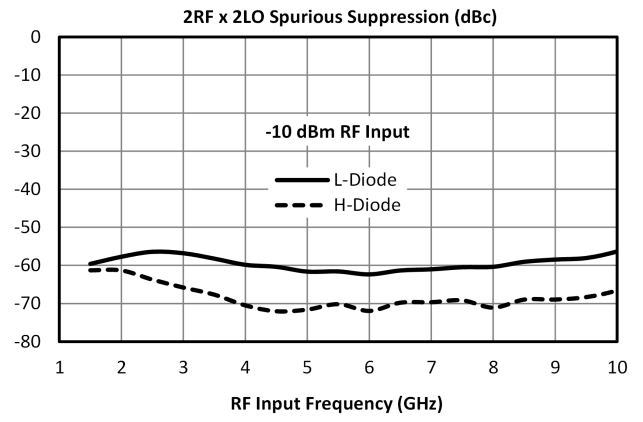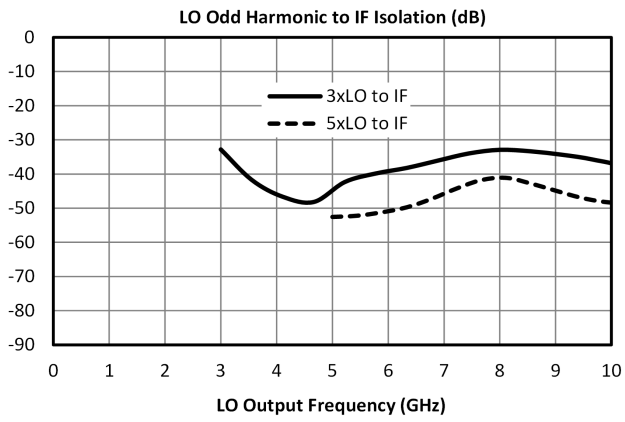

OF LIFE

Spur Table

Downconversion Spurious Suppression

Spurious data is taken by selecting RF and LO frequencies (+mLO+nRF) within the RF/LO bands, to create a spurious output within the IF band. The mixer is swept across the full spurious band and the mean is calculated. The numbers shown in the table below are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by (n-1), where “n” is the RF spur order. For example, the 2RFx2LO spur is 68 dBc for the H-diode version for a -10 dBm input, so a -20 dBm RF input creates a spur that is (2-1) x (-10 dB) dB lower, or 78 dBc.

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xRF	18 (18)	Reference	29 (31)	12 (11)	30 (31)	25 (23)
2xRF	68 (63)	55 (49)	68 (59)	56 (48)	65 (59)	54 (51)
3xRF	90 (75)	66 (50)	79 (65)	72 (56)	80 (64)	70 (54)
4xRF	96 (87)	112 (86)	109 (88)	107 (83)	111 (93)	106 (85)
5xRF	112 (96)	119 (91)	126 (99)	119 (84)	129 (102)	122 (93)

Unless otherwise specified L diode data taken with +10 dBm LO drive, H diode data is taken with +17 dBm LO drive, S diode data is taken with +17 dBm LO drive.

Upconversion Spurious Suppression

Spurious data is taken by mixing an input within the IF band, with LO frequencies (+mLO+nIF), to create a spurious output within the RF output band. The mixer is swept across the full spurious output band and the mean is calculated. The numbers shown in the table below are for a -10 dBm IF input. Spurious suppression is scaled for different IF input power levels by (n-1), where “n” is the IF spur order. For example, the 2IFx1LO spur is typically 68 dBc for the H-diode version for a -10 dBm input, so a -20 dBm IF input creates a spur that is (2-1) x (-10 dB) dB lower, or 78 dBc.

-10 dBm IF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xIF	13 (14)	Reference	29 (30)	11 (11)	29 (32)	20 (20)
2xIF	57 (51)	68 (61)	55 (50)	58 (53)	42 (38)	58 (54)
3xIF	89 (75)	74 (61)	81 (69)	65 (53)	71 (60)	62 (50)
4xIF	117 (98)	113 (94)	106 (90)	101 (92)	88 (77)	95 (88)
5xIF	132 (115)	118 (93)	124 (108)	110 (91)	116 (100)	102 (92)


Unless otherwise specified L diode data taken with +10 dBm LO drive, H diode data is taken with +17 dBm LO drive, S diode data is taken with +17 dBm LO drive.

END OF LIFE

Mechanical Data


Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

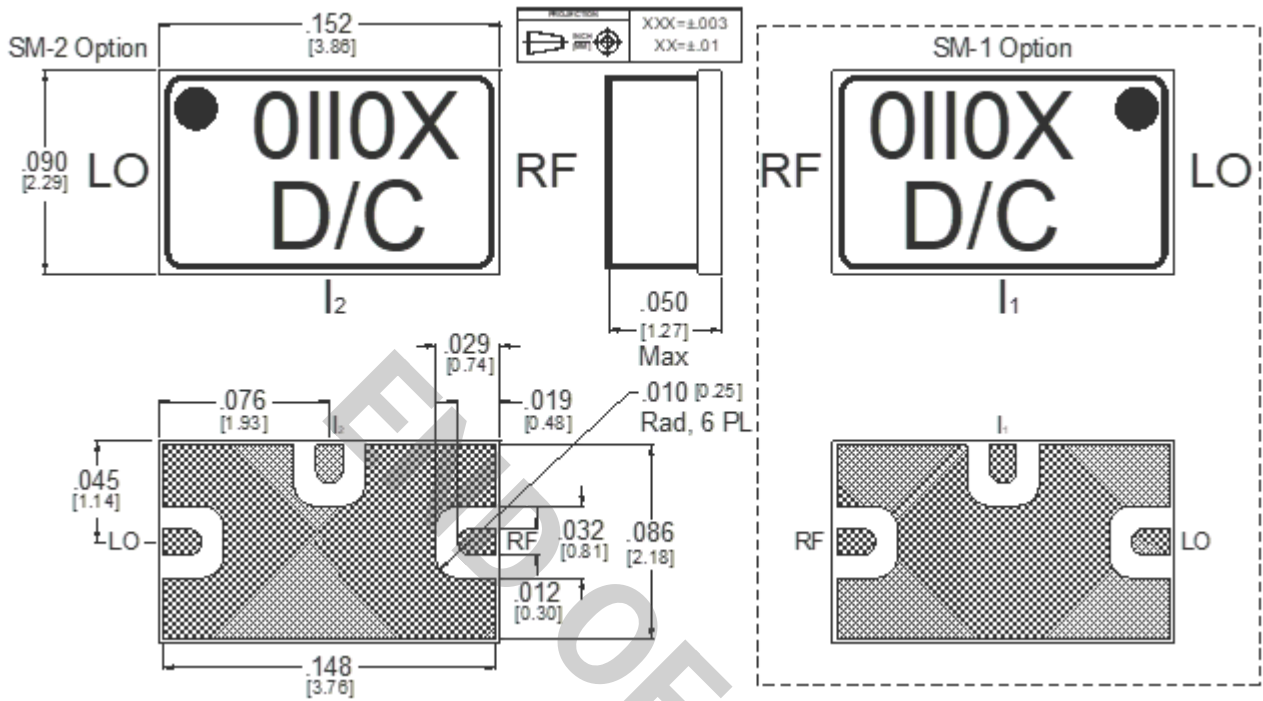

Footprint Image

Download : [Footprint Drawing](#)

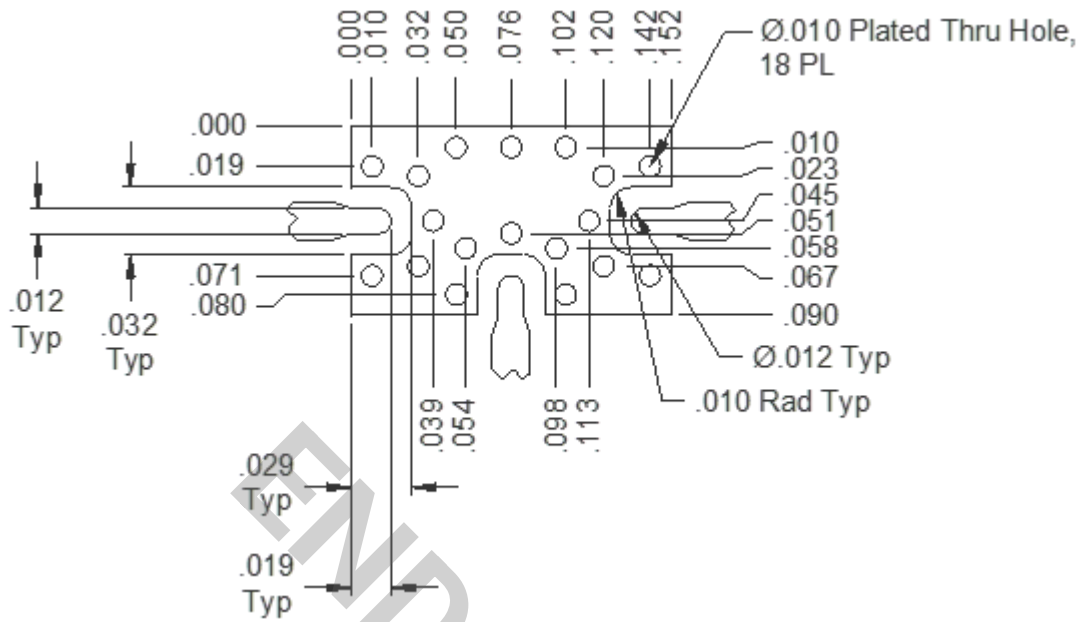

Notes

DATA SHEET NOTES:

1. Mixer Conversion Loss Plot IF frequency is 100 MHz.
2. Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.
3. Conversion Loss typically degrades less than 0.5 dB for LO drives 2 dB below the lowest and 3 dB above highest nominal LO drive levels.
4. Conversion Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
5. Unless otherwise specified L diode data taken with +10 dBm LO drive, H diode data is taken with +17 dBm LO drive, S diode data is taken with +17 dBm LO drive
6. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
7. Catalog mixer circuits are continually improved. Configuration control requires custom mixer model numbers and specifications.

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2022 - 2025, Marki Microwave, Inc