


MMIQ-0626LSM-2

Surface Mount MMIC IQ Mixer

DEVICE OVERVIEW

General Description

The MMIQ-0626LSM is a passive GaAs MMIC IQ mixer. This is an ultra-broadband mixer spanning 6 to 26GHz on the RF and LO ports with an IF from DC to 6 GHz. Up to 40 dB of image rejection is available due to the excellent phase and amplitude balance of its on-chip LO quadrature hybrid. Banded performance is possible at lower LO drives. Both surface QFNs and evaluation boards are available.




Features

RF/LO Frequency Range: 6 - 26 GHz
 IF Frequency Range: DC - 6 GHz
 I+Q Conversion Loss: 9 dB
 Image Rejection: 35 dB
 LO-RF Isolation: 39 dB

Applications

- Single Sideband and Image Rejection Mixing
- IQ Modulation / Demodulation
- Vector Signal Modulation and Demodulation
- Band Shifting

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
MMIQ-0626LSM-2	Surface Mount MMIC IQ Mixer	QFN	-	REACH RoHS	Released	EAR99
EVAL-MMIQ-0626L	Evaluation Board, Surface Mount MMIC 6-26 GHz IQ Mixer	EVAL	-	REACH RoHS	Released	EAR99
MMIQ-0626L-2-TR	Tape and Reel, Surface Mount MMIC IQ Mixer	QFN	13"	REACH RoHS	Released	EAR99

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Recommended Operating Conditions
 - Sequencing Requirements
 - Electrical Specifications
 - Typical Performance Plots
 - Spur Tables
- **Mechanical Data**
 - Outline Drawing
- **Footprint Image**
- **Evaluation Board**
 - Evaluation Board Outline Drawing


Revision History

Revision Code	Revision Date	Comment
-	2012-03-01	Datasheet Initial Release
A	2019-08-01	Changed I/Q Max Current Rating
B	2019-10-01	Updated Max Power Rating
C	2022-02-01	I/Q Port Functions, Plots, ESD Updated






Port Configuration and Functions

Port Diagram

A bottom-up view of the MMIQ-0626L's SM package outline drawing is shown below. The mixer may be operated as either a downconverter or an upconverter. Use of the RF or IF as the input or output port will depend on the application.

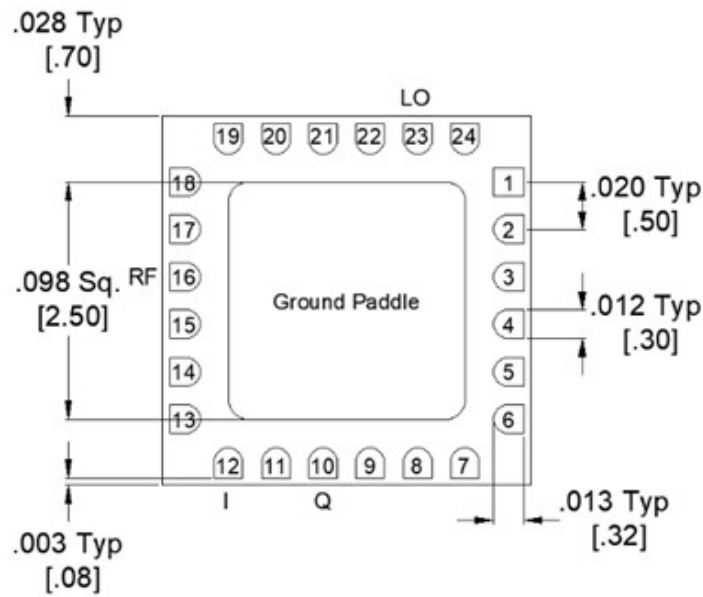

Port Functions

Port	Function	Description	Equivalent Circuit for Package
GND	Ground	SM package ground path is provided through the ground paddle.	GND 
Pin 10	Q Input / Output	Port 3 is diode coupled and AC matched to 50Ω over the specified Q port frequency range.	P10 
Pin 12	I Input / Output	Port 4 is diode coupled and AC matched to 50Ω over the specified I port frequency range.	P12 
Pin 16	RF Input / Output	Port 1 is DC short and AC matched to 50Ω over the specified RF frequency range.	P16 
Pin 23	LO Input	Port 2 is DC open and AC matched to 50Ω over the specified LO frequency range.	P23 

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Pin 10 DC Current	30	mA
Pin 12 DC Current	30	mA
Power Handling, at any Port	26	dBm

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Dimensions	-	4 x 4 mm
Moisture Sensitivity Level	-	MSL 1

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
LO Input Power	11	15	20	dBm
RF/IF Input Power	-	-	6	dBm
Ambient Temperature	-55	25	100	°C

Sequencing Requirements

There is no requirement to apply power to the ports in a specific order. However, it is recommended to provide a 50Ω termination to each port before applying power. This is a passive diode mixer that requires no DC bias.

Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for a down conversion application with a +15dBm sine wave LO input. Min and Max limits apply only to our connectorized units and are guaranteed at TA=+25°C.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Amplitude Balance ¹	-	-	-	-	0.5	-	dB
Conversion Loss ²	RF/LO = 24 - 26 GHz I = DC - 0.2 GHz	24	26	-	12	15	dB
Conversion Loss ³	RF/LO = 24 - 26 GHz Q = DC - 0.2 GHz	24	26	-	14	17	dB
Conversion Loss ⁴	RF/LO = 6 - 24 GHz I = DC - 0.2 GHz	6	24	-	12	15	dB
Conversion Loss ⁵	RF/LO = 6 - 24 GHz Q = DC - 0.2 GHz	6	24	-	12	15	dB
Conversion Loss ⁶	RF/LO = 6 - 26 GHz I = 0.2 - 6 GHz	6	26	-	14	-	dB
Conversion Loss ⁷	RF/LO = 6 - 26 GHz Q = 0.2 - 6 GHz	6	26	-	14	-	dB
IF Frequency Range	-	-	-	0	-	6	GHz
Image Rejection ⁸	RF/LO = 6 - 26 GHz I+Q = DC - 0.2 GHz	6	26	-	35	-	dBc
Input 1 dB Gain Compression Point (P1dB), I	-	-	-	-	6	-	dBm
Input 1 dB Gain Compression Point (P1dB), Q	-	-	-	-	6	-	dBm
Input IP3 ⁹	RF/LO = 6 - 26 GHz I = DC - 0.2 GHz	6	26	-	14	-	dBm
Isolation, LO to IF	IF/LO = 6 - 26 GHz	6	26	-	48	-	dB
Isolation, LO to RF	RF/LO = 6 - 26 GHz	6	26	-	39	-	dB
Isolation, RF to IF	RF/IF = 6 - 26 GHz	6	26	-	31	-	dB
LO Frequency Range	-	-	-	6	-	26	GHz
Noise Figure ¹⁰	RF/LO = 6 - 24 GHz I = DC - 0.2 GHz	6	24	-	12	-	dB
Noise Figure ¹¹	RF/LO = 6 - 24 GHz Q = DC - 0.2 GHz	6	24	-	12	-	dB
Phase Balance	-	-	-	-	4	-	°
Q (Pin 10) Frequency Range	-	-	-	0	-	6	GHz
RF Frequency Range	-	-	-	6	-	26	GHz

^[1] Amplitude and phase balance measured in a down conversion.

^{[2][3][4][5][6][7]} Measured as an I/Q down converter. (i.e., I and Q powers are not combined)

^[8] Image Rejection and Single sideband performance plots are defined by the upper sideband (USB) or lower sideband (LSB) with respect to the LO signal. Plots are defined by which sideband is selected by the external IF quadrature hybrid.







^[9] Typical IIP3 measured with I and Q ports combined with an external quadrature hybrid coupler in a down conversion.









^[10] Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.









^[11] Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.





Typical Performance Plots

I output means that the IF output signal is measured at the I port of the mixer and the Q port is loaded. Q output means the IF output signal is measured at the Q port of the mixer while the I port is loaded.

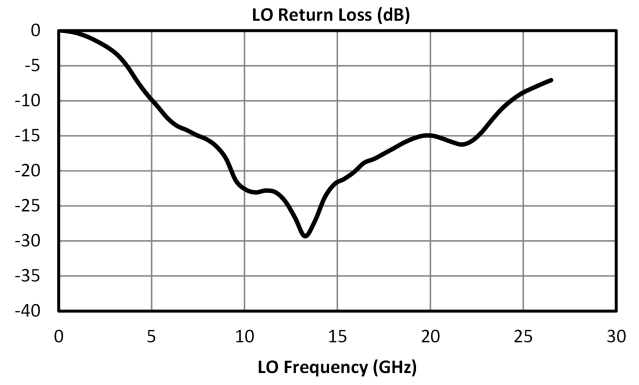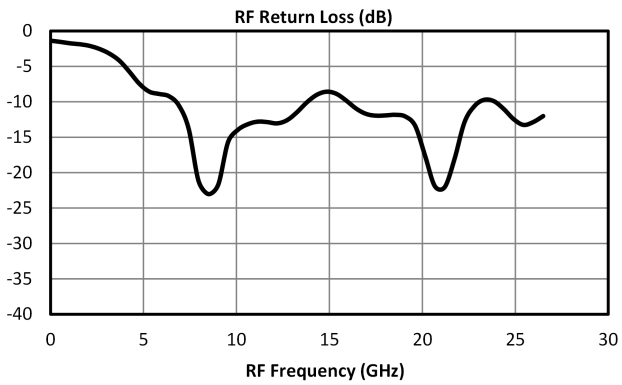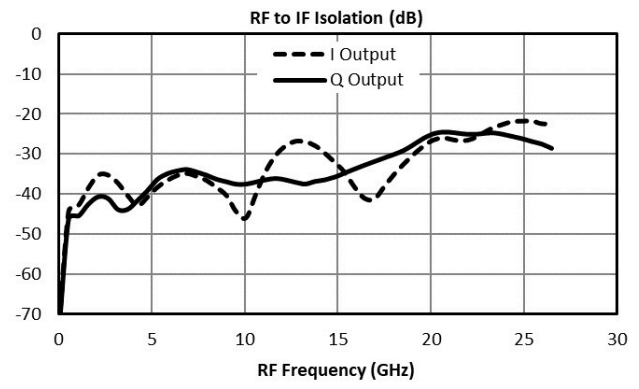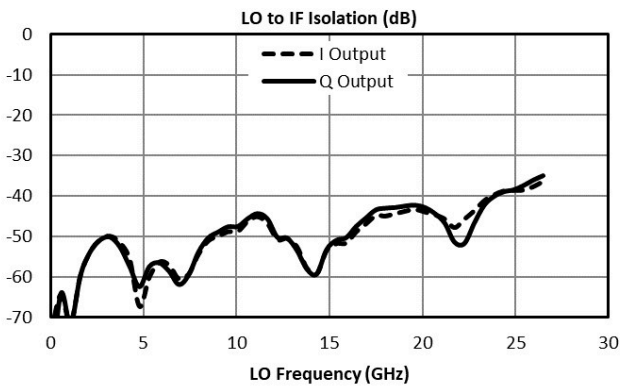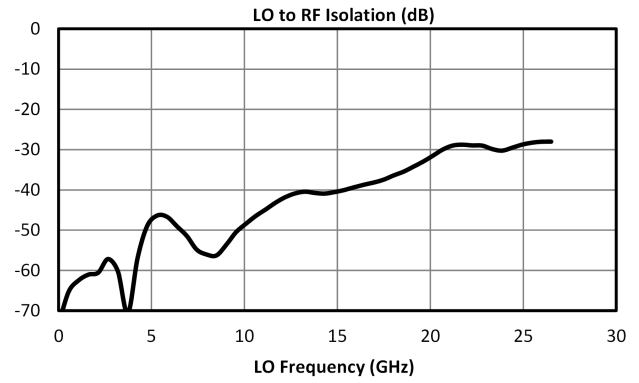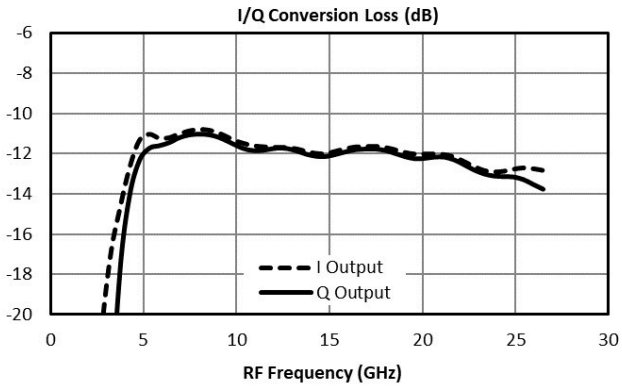

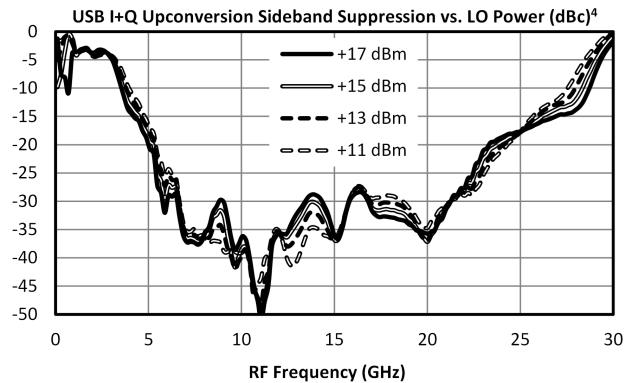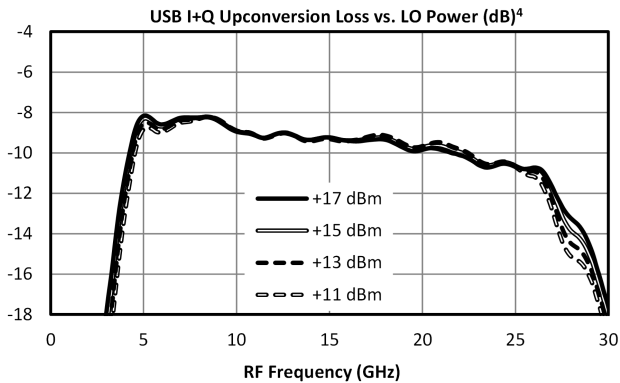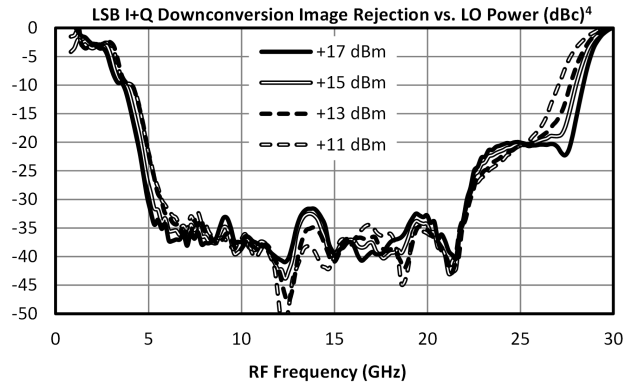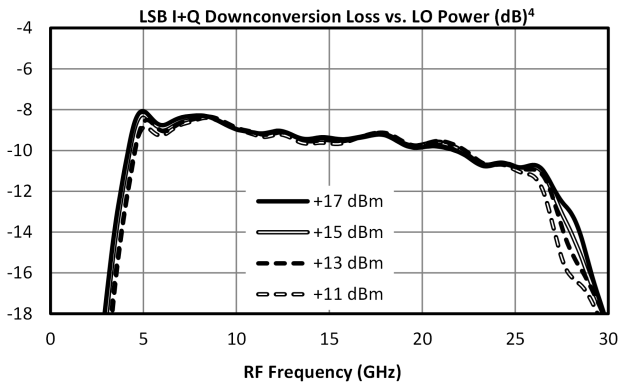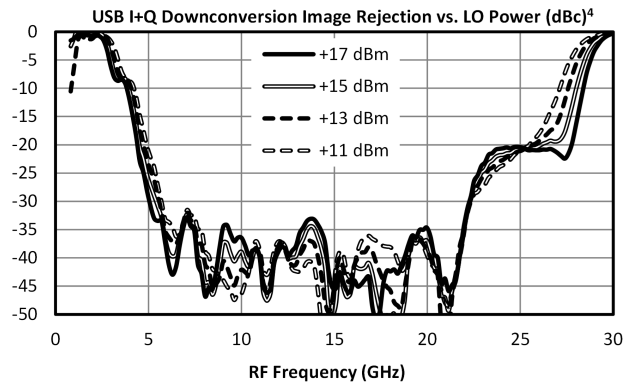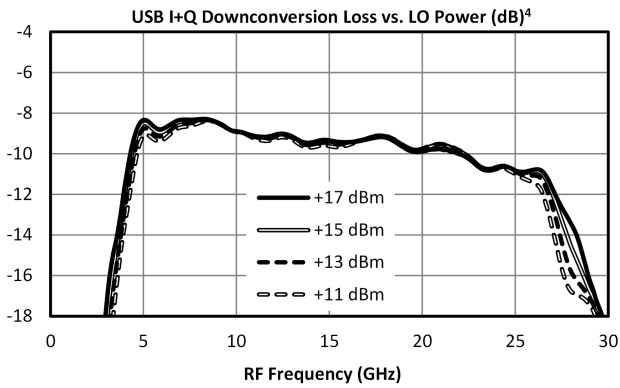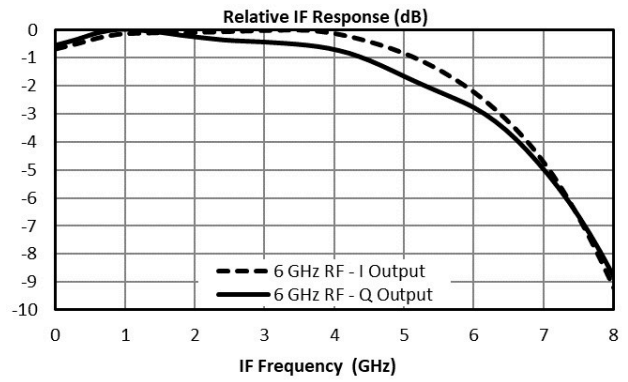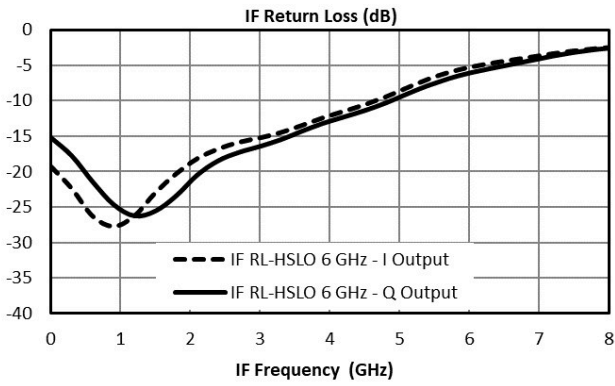

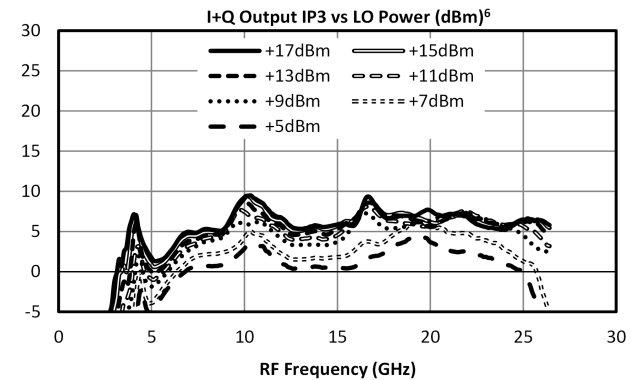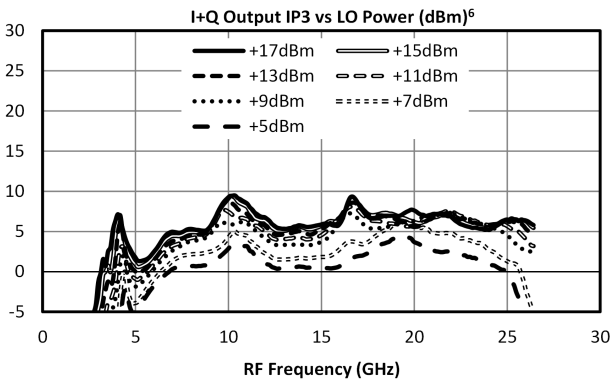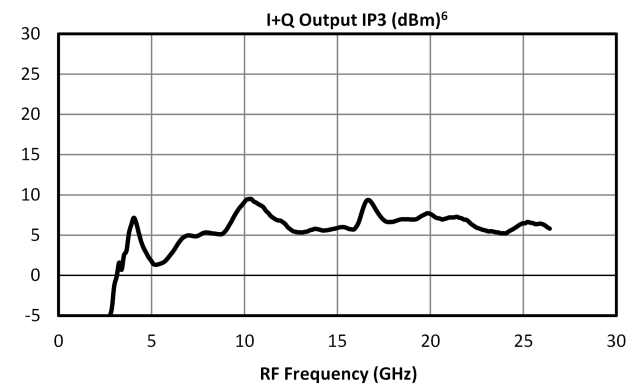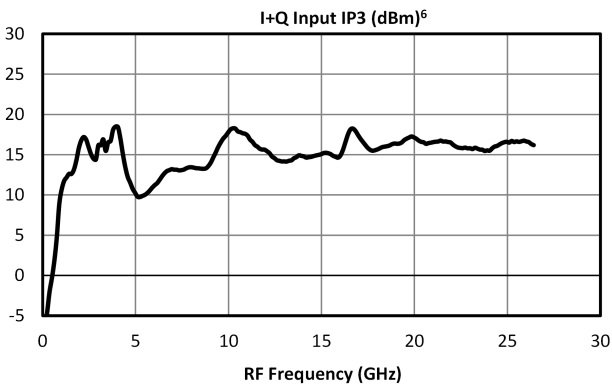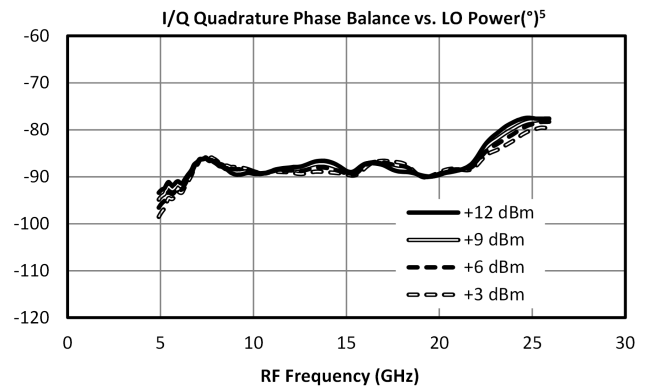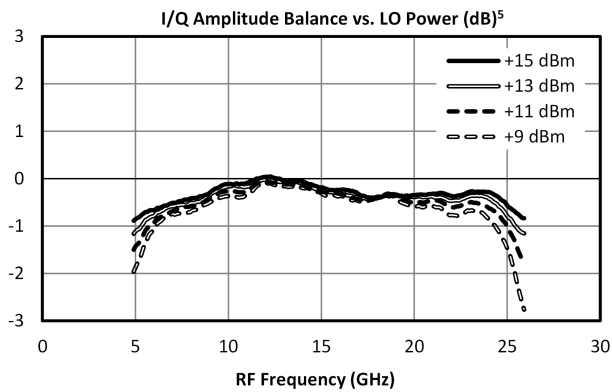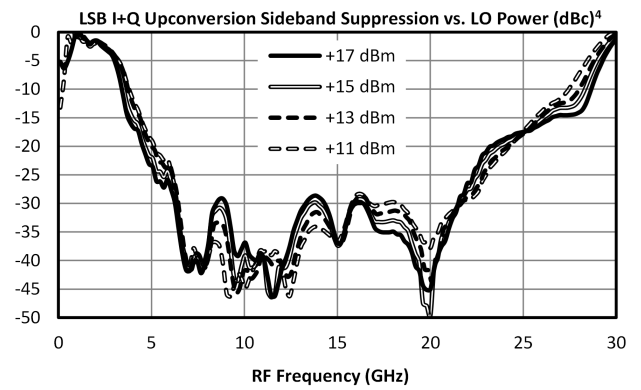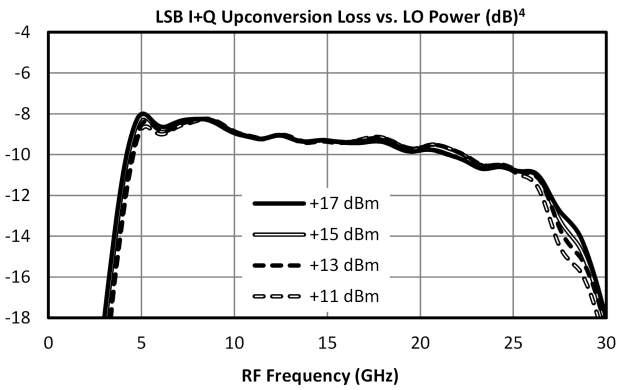

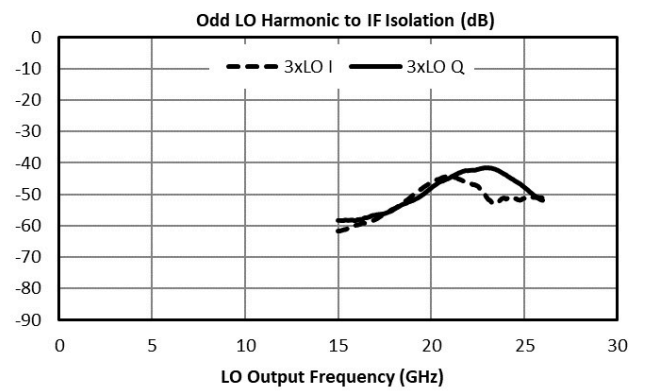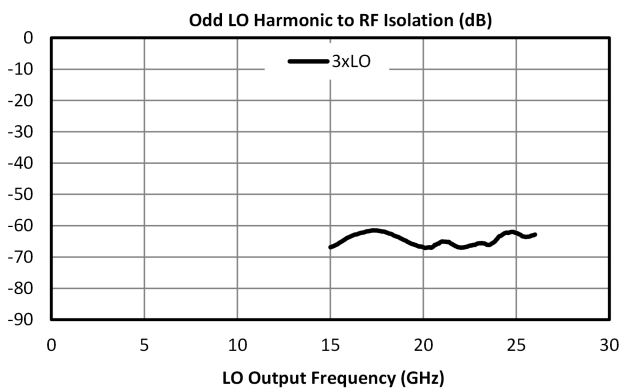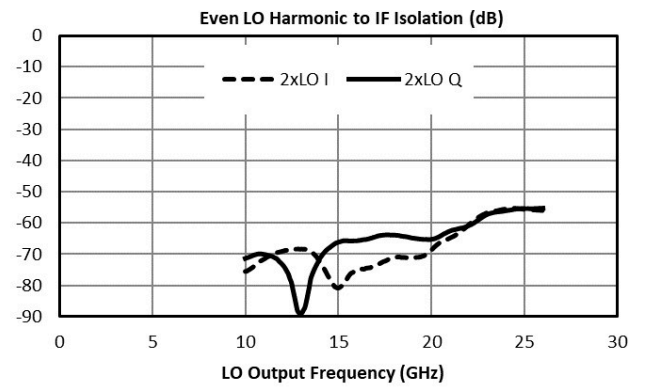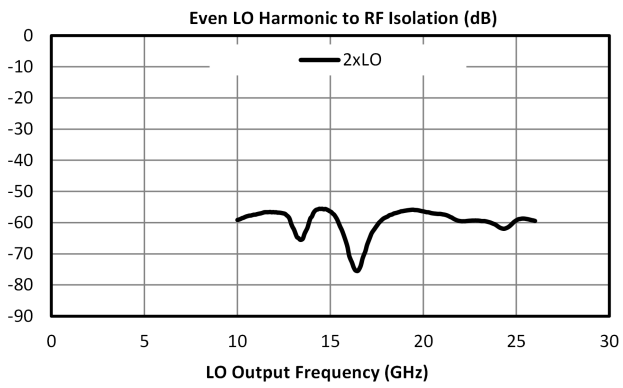

Spur Table

Typical Spurious Performance: Down-Conversion

Typical spurious data is provided by selecting RF and LO frequencies ($\pm m \cdot LO \pm n \cdot RF$) within the RF/LO bands, to create a spurious output within the IF band. The mixer is swept across the full spurious band and the mean is calculated. The numbers shown in the table below are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by (n-1), where “n” is the RF spur order. For example, the 2RF x 2LO spur is 64 dBc for a -10 dBm input, so a -20 dBm RF input creates a spur that is (2-1) x (-10 dB) lower, or 74 dBc. Data is shown for the frequency plan in Typical Performance.

Typical Down-conversion spurious suppression (dBc): Q Port (I Port)

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
0xRF	-	48 (48)	65 (68)	50 (52)	N/A	N/A
1xRF	21 (21)	Reference	41 (32)	17 (10)	55 (44)	N/A
2xRF	72 (73)	47 (48)	64 (65)	57 (57)	67 (68)	59 (55)
3xRF	74 (73)	50 (51)	52 (57)	61 (62)	67 (69)	60 (61)
4xRF	N/A	69 (81)	69 (76)	77 (81)	89 (88)	87 (87)
5xRF	N/A	N/A	74 (81)	76 (80)	88 (93)	93 (93)

Typical Spurious Performance: Up-Conversion

Typical spurious data is taken by mixing an input within the IF band, with LO frequencies ($\pm m \cdot LO \pm n \cdot IF$), to create a spurious output within the RF output band. The mixer is swept across the full spurious output band and the mean is calculated. The numbers shown in the table below are for a -10 dBm IF input. Spurious suppression is scaled for different IF input power levels by (n-1), where “n” is the IF spur order. For example, the 2IFx1LO spur is typically 62 dBc for a -10 dBm input with a sine-wave LO, so a -20 dBm IF input creates a spur that is (2-1) x (-10 dB) lower, or 72 dBc. Data is shown for the frequency plan in Typical Performance.


Typical Up-conversion spurious suppression (dBc): Q Port (I Port)

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
0xIF	-	39 (40)	60 (60)	64 (64)	N/A	N/A
1xIF	23 (21)	Reference	38 (33)	10 (9)	42 (42)	N/A
2xIF	70 (69)	62 (64)	53 (59)	67 (70)	50 (58)	58 (71)
3xIF	73 (74)	60 (61)	72 (72)	52 (55)	68 (71)	41 (46)
4xIF	94 (78)	91 (78)	81 (69)	92 (77)	78 (72)	83 (70)
5xIF	97 (77)	95 (75)	99 (79)	83 (68)	95 (76)	67 (54)

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

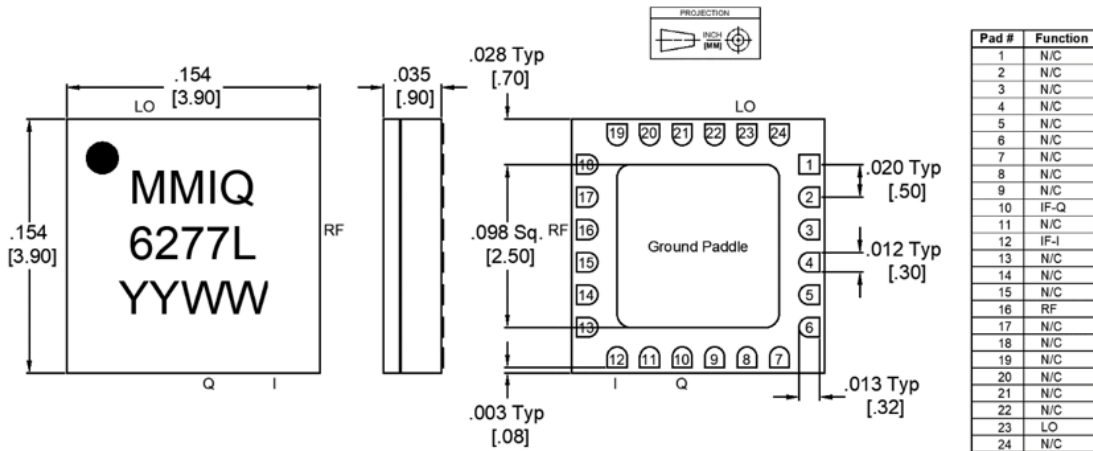


- Substrate material is ceramic.
- I/O Leads and Ground Paddle plating is (from base to finish):

Ni:	8.89um MAX	1.27um MIN
Pd:	0.17um MAX	0.07um MIN
Au	0.254um MAX	0.03um MIN
- All unconnected pads should be connected to PCB RF ground.

Footprint Image


Download : [Footprint Drawing](#)

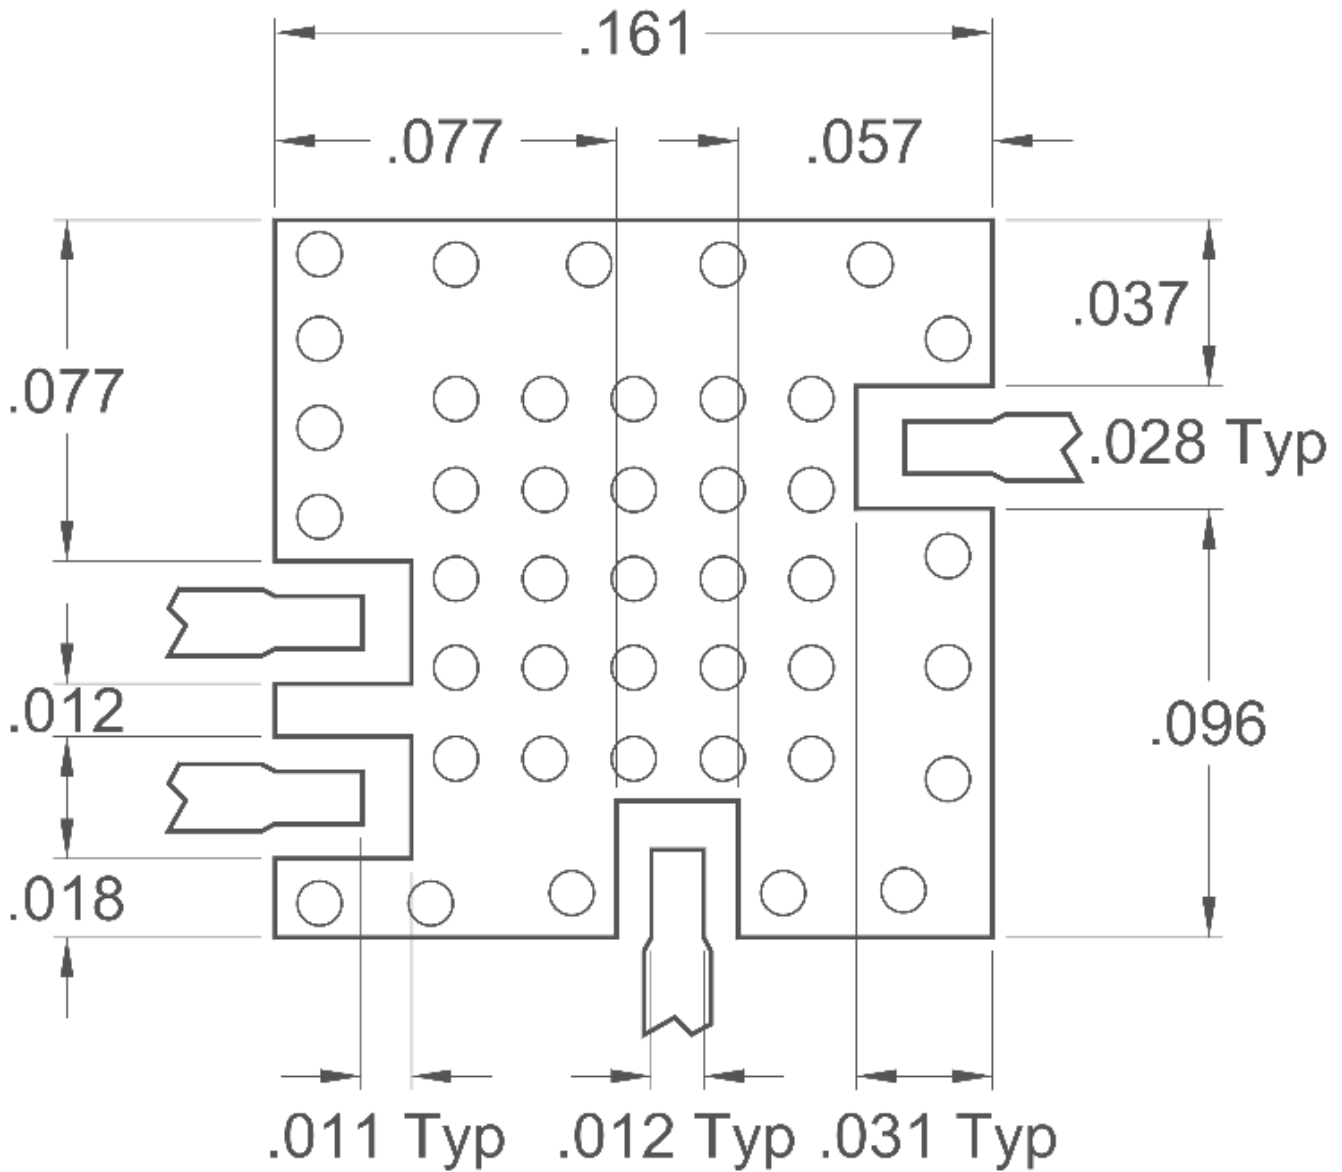

Evaluation Board - Outline Drawing

Port	Connector Type
LO	SMA Female
RF	SMA Female
I/Q	SMA Female

Note: Eval Connectors are not removeable.

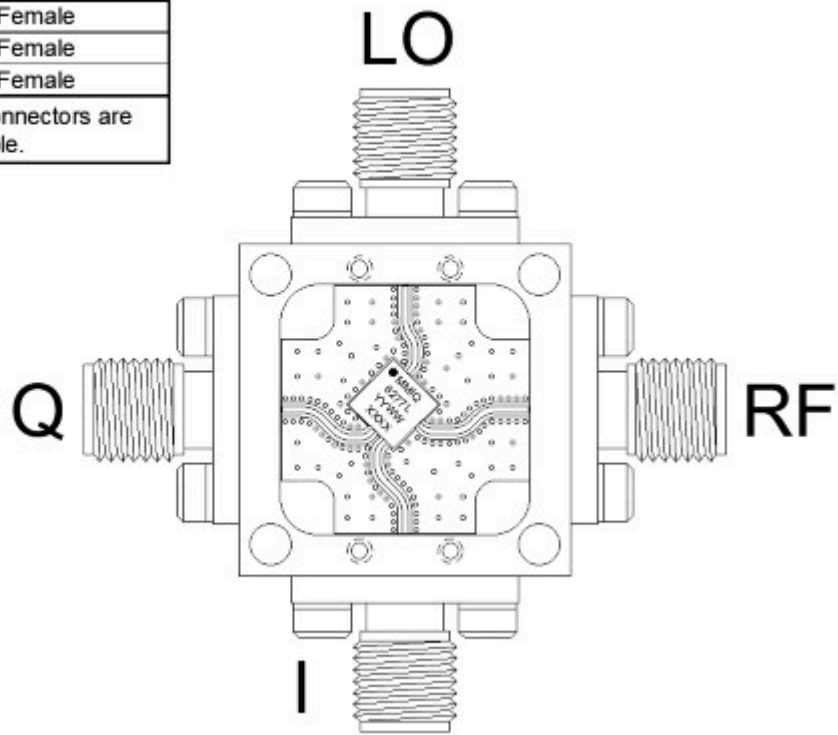

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2012, 2019, 2022, Marki Microwave, Inc