


BAL-0010 BROADBAND BALUN

DEVICE OVERVIEW

General Description

The BAL-0010 is a broadband balun, hand-tuned for optimal phase and amplitude balance over a 200 kHz to 10 GHz bandwidth. It serves as an excellent choice for analog to digital converters, balanced receivers, baseband digital modulations, and signal integrity enhancement.




Features

- 2:1 Impedance Ratio
- 200 kHz to 10 GHz Balun (Balanced to Unbalanced Transformer)
- Matched 50 Ohm Impedance on Input and Output Ports
- Tuned for Optimal Phase/Amplitude Balance

Applications

- Analog to Digital Converters
- Balanced Receivers
- Baseband Digital Modulation
- Signal Integrity

Functional Block Diagram

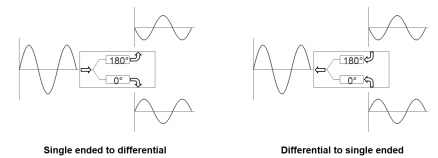

Part Ordering Options

| Part Number | Description | Connectors | Green Status | Product Lifecycle | Export Classification |
|-------------|-----------------|-----------------|---------------|-------------------|-----------------------|
| BAL-0010 | BROADBAND BALUN | <u>Standard</u> | REACH RoHS | Released | EAR99 |

Table Of Contents


- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Electrical Specifications
 - Typical Performance Scattering Parameters
 - Mixed Mode Scattering Parameters
- **Mechanical Data**
 - Outline Drawing

Revision History




| Revision Code | Revision Date | Comment |
|---------------|---------------|--|
| - | 2011-01-01 | Datasheet initial Release |
| A | 2014-01-01 | Typical Performance plots added |
| B | 2019-10-01 | Mixed Mode Scattering Parameters added |
| C | 2019-11-01 | RoHS Compliant assembly |
| D | 2020-07-01 | Specs Table update |
| E | 2020-10-01 | Specs Table update |

Port Configuration and Functions

Port Diagram

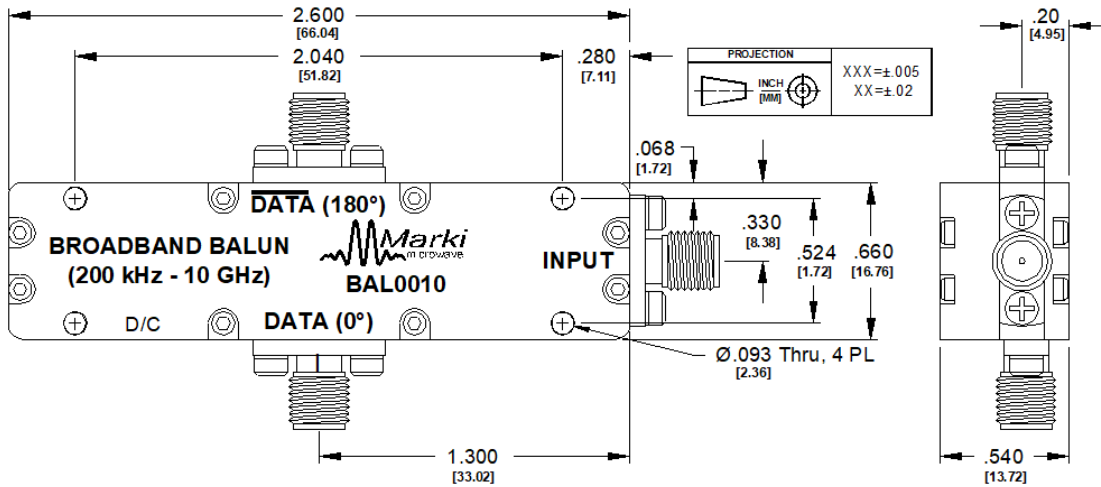

Port Functions

| Port | Function | Connector Type | Description | DC Equivalent Circuit |
|-------------------------------|-----------|----------------|--|---|
| 180° Port (Balanced) | 180° Port | SMAF | The 180 (degree) port is DC short to ground. |  |
| Common Port / In (Unbalanced) | RF Input | SMAF | The common port is DC short to ground. |  |
| Out 1 / 0° Port (Balanced) | 0° Port | SMAF | The 0 (degree) port is DC short to ground. |  |

Specifications

Absolute Maximum Ratings

| Parameter | Maximum Rating | Unit |
|-------------------|----------------|------|
| RF Power Handling | 1 | W |

Package Information

| Parameter | Details | Rating |
|------------|---------|------------------|
| Weight | - | 32g |
| Dimensions | - | 66.04 x 16.76 mm |

Electrical Specifications






Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

| Parameter | Test Conditions | Minimum Frequency (GHz) | Maximum Frequency (GHz) | Min | Typ | Max | Unit |
|------------------------------------|-----------------|-------------------------|-------------------------|-----|------|-----|------|
| Amplitude Balance | - | 0.0002 | 10 | - | 0.2 | 0.6 | dB |
| Common Mode Rejection | - | 0.0002 | 10 | 25 | 35 | - | dB |
| Impedance Ratio | - | - | - | - | 2:1 | - | |
| Insertion Loss as a Mode Converter | - | 0.0002 | 10 | - | 5 | 6.5 | dB |
| Isolation | - | 0.0002 | 10 | - | 9 | - | dB |
| Nominal Phase Shift | - | 0.0002 | 10 | - | 180 | - | ° |
| Phase Balance | - | 0.0002 | 10 | - | 2 | 6 | ° |
| Risetime/Falltime ¹ | - | 0.0002 | 10 | - | 20 | - | ps |
| VSWR (Input) | - | 0.0002 | 10 | - | 1.45 | - | |
| VSWR (Output) | - | 0.0002 | 10 | - | 1.8 | - | |

^[1] Specified as 90%/10%.







Typical Performance Scattering Parameters




Three port scattering parameters measured as three single-ended 50Ω ports showing relationship between any two ports. For example: S21 and S31, often referred to as insertion loss of a balun, is the output response on ports 2 and 3 with an input stimulus on port 1.

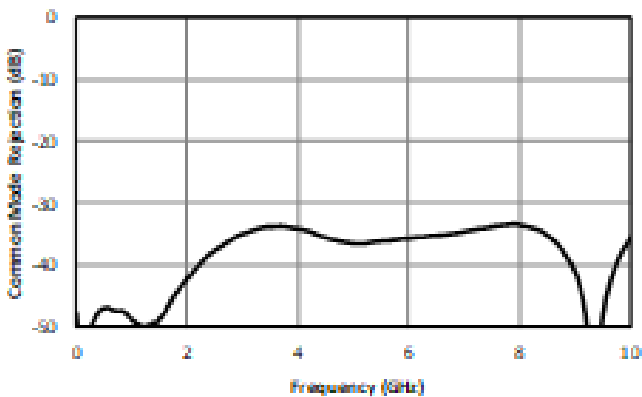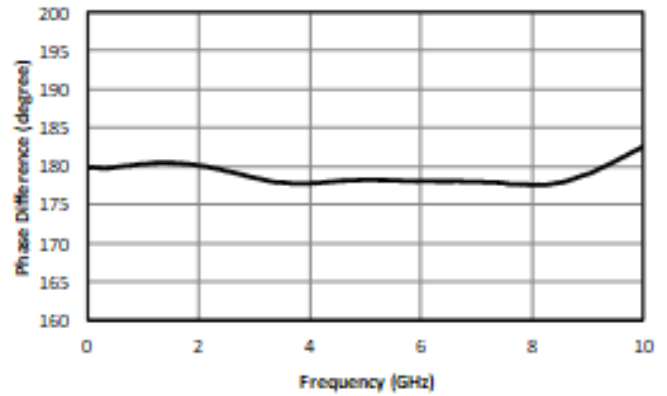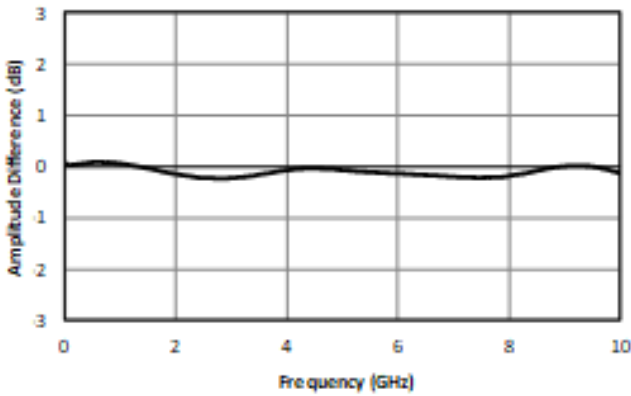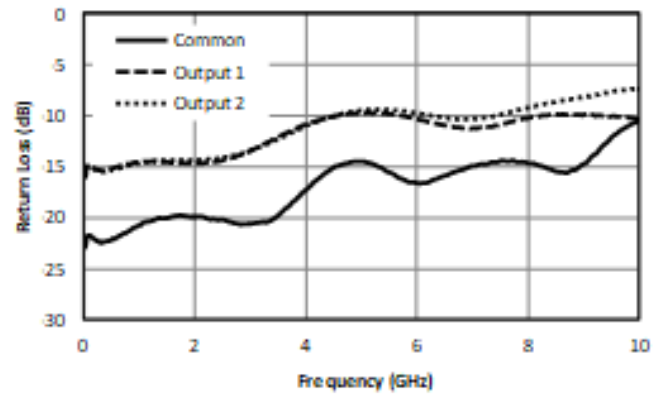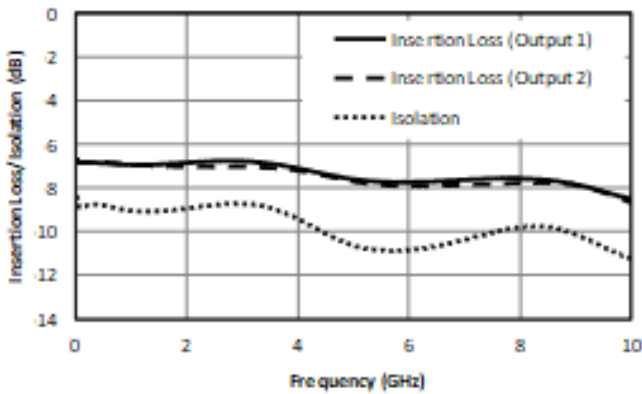

Mixed Mode Scattering Parameters

Mixed mode scattering parameters are used to characterize differential circuits. For baluns, this means that the 0° and 180° ports become a single 100Ω differential port and the common port remains the same 50Ω common port. The two-port s-parameters of the balun are then characterized based on differential (d), common mode (c), or single-ended (s) signals. For example: S12ds is the differential output response given a single ended input.

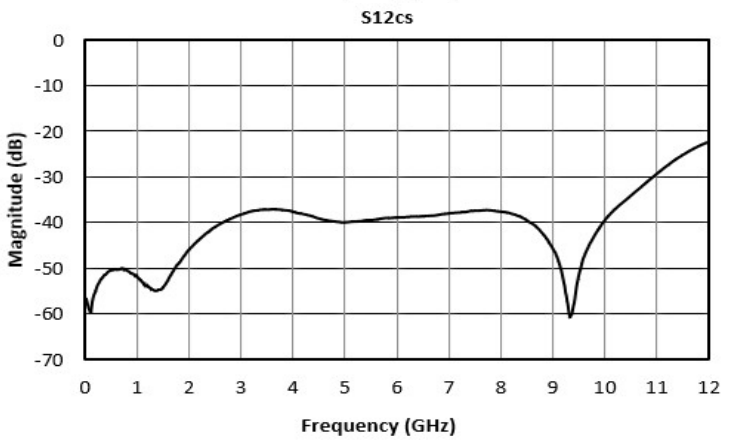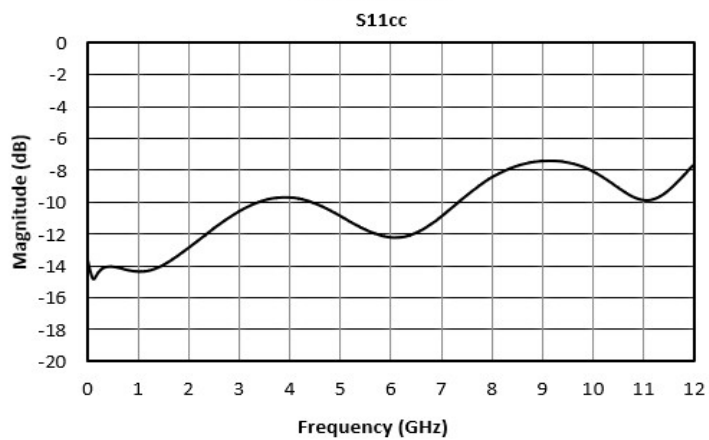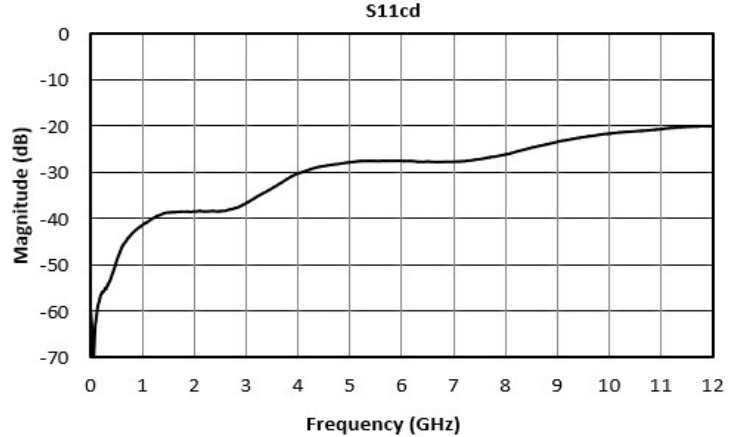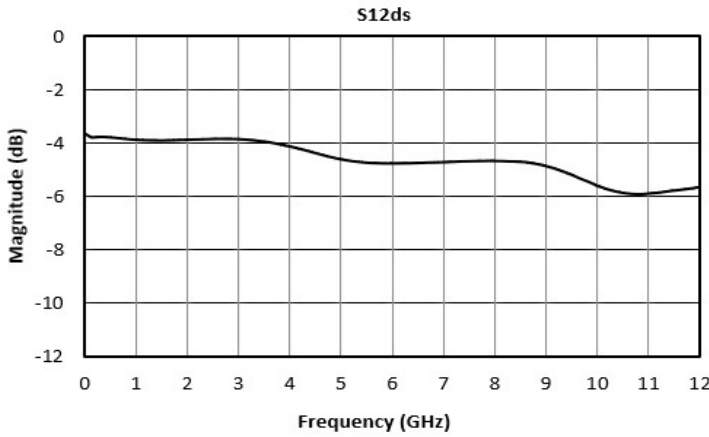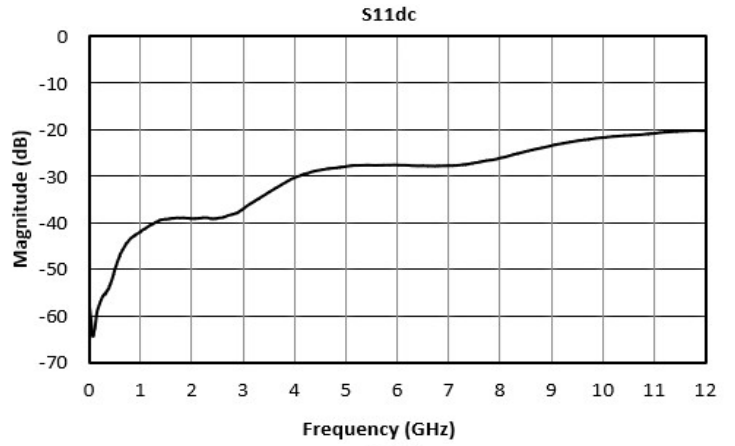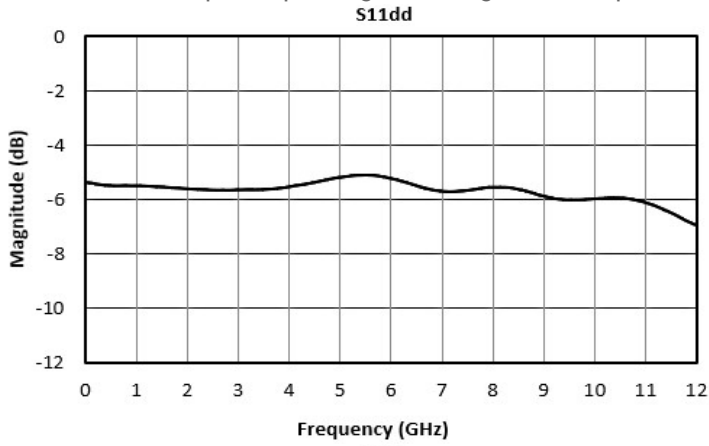


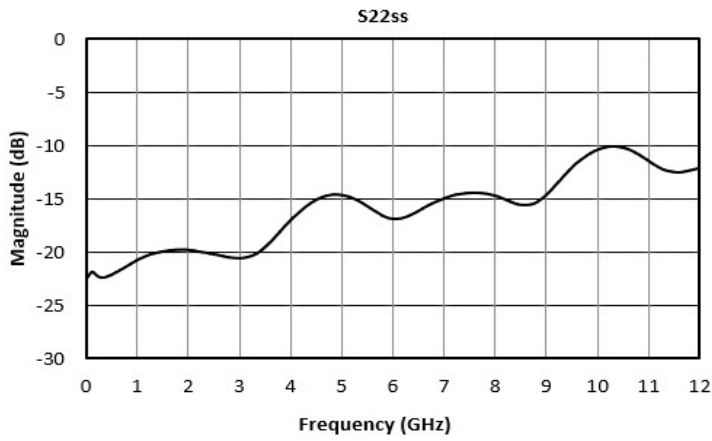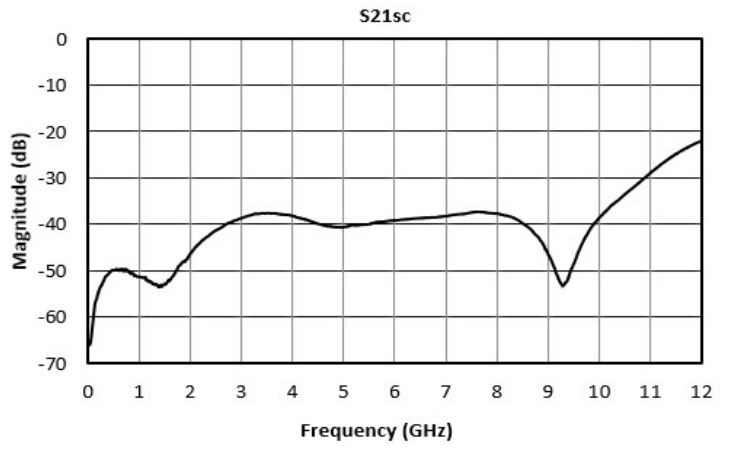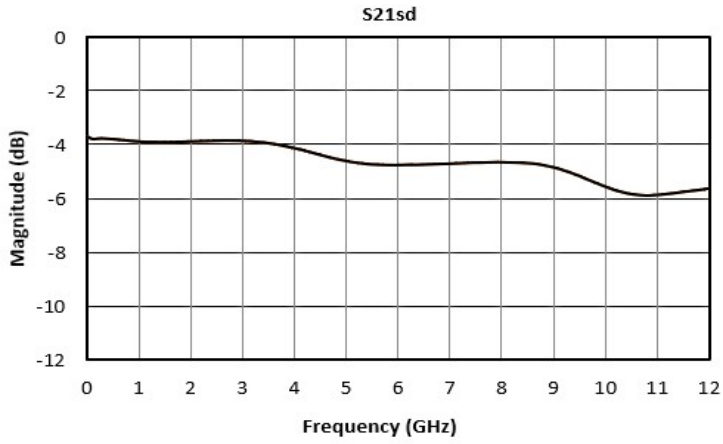

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

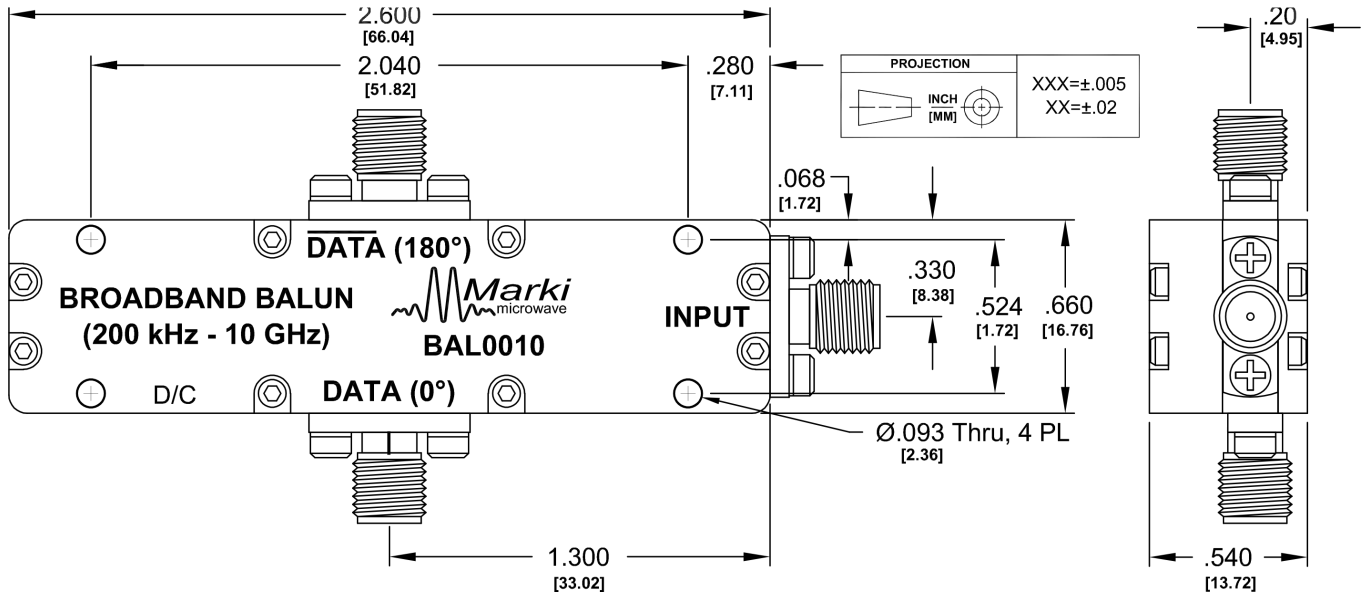

DISCLAIMER

MARKI MICROWAVE, LLC., (“MARKI”) PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES “AS IS” AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2011, 2014, 2019 - 2020, Marki Microwave, LLC