


BALH-0010

High Power Balun (200 kHz to 10 GHz)

DEVICE OVERVIEW

General Description

The BALH-0010 is a broadband balun, hand-tuned for optimal phase and amplitude balance over a 200 kHz to 10 GHz bandwidth. It serves as an excellent choice for analog to digital converters, balanced receivers, baseband digital modulations, and signal integrity enhancement.



[Download s-parameters here](#)


Features

- 1:1 Impedance Ratio
- 200 kHz to 10 GHz Balun (Balanced to Unbalanced Transformer)
- Better than 37 dBm 1-dB compression point
- Tuned for Optimal Phase/Amplitude Balance

Applications

- Analog to Digital Converters
- Balanced Receivers
- Baseband Digital Modulation
- Signal Integrity

Functional Block Diagram

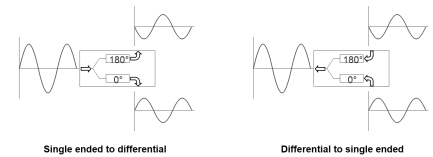

Part Ordering Options

Part Number	Description	Connectors	Green Status	Product Lifecycle	Export Classification
BALH-0010	High Power Balun (200 kHz to 10 GHz)	<u>Standard</u>	REACH RoHS	Released	EAR99

Table Of Contents




- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Functions
- **Revision History**
- **Specifications**
 - Package Information
 - Electrical Specifications
 - Time Domain Performance Plot
 - Typical Performance Scattering Parameters
 - Mixed Mode Scattering Parameters
- **Mechanical Data**
 - Outline Drawing

Revision History

Revision Code	Revision Date	Comment
-	2015-01-01	Datasheet initial Release
A	2019-10-01	Mixed Mode Scattering Parameters added
B	2019-11-01	RoHS Compliant assembly
C	2020-07-01	Specs table update
D	2020-10-01	Specs table update

Port Configuration and Functions

Port Functions

Port	Function	Connector Type	Description	DC Equivalent Circuit
Common Port / In (Unbalanced)	RF Input	SMAF	The common port is DC short to ground.	 Common Port (Unbalanced)
Out 1 / 0° Port (Balanced)	0° Port	SMAF	The 0° port is DC short to ground.	 0° Port (Balanced)
Out 2 / 180° Port (Balanced)	180° Port	SMAF	The 180° port is DC short to ground.	 180° Port (Balanced)

Specifications

Package Information

Parameter	Details	Rating
Weight	-	32g
Dimensions	-	66.04 x 16.76 mm

Electrical Specifications


Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Amplitude Balance	-	0.0002	10	-	0.2	0.6	dB
Common Mode Rejection	-	0.0002	10	25	35	-	dB
Impedance Ratio	-	-	-	-	1:1	-	
Input P1dB ¹	-	0.0002	10	37	-	-	dBm
Insertion Loss as a Mode Converter	-	0.0002	10	-	2.5	4.5	dB
Isolation	-	0.0002	10	-	8	-	dB
Nominal Phase Shift	-	0.0002	10	-	180	-	°
Phase Balance	-	0.0002	10	-	2	6	°
Risetime/Falltime ²	-	0.0002	10	-	13	-	ps
VSWR (Input)	-	0.0002	10	-	1.5	-	
VSWR (Output)	-	0.0002	10	-	1.75	-	

[1] Measured in a well-heat sinked environment.






[2] Specified as 90%/10%. Calculated from $\tau_{balun2} = (\tau_{out2} - \tau_{in2})$

Time Domain Performance Plot

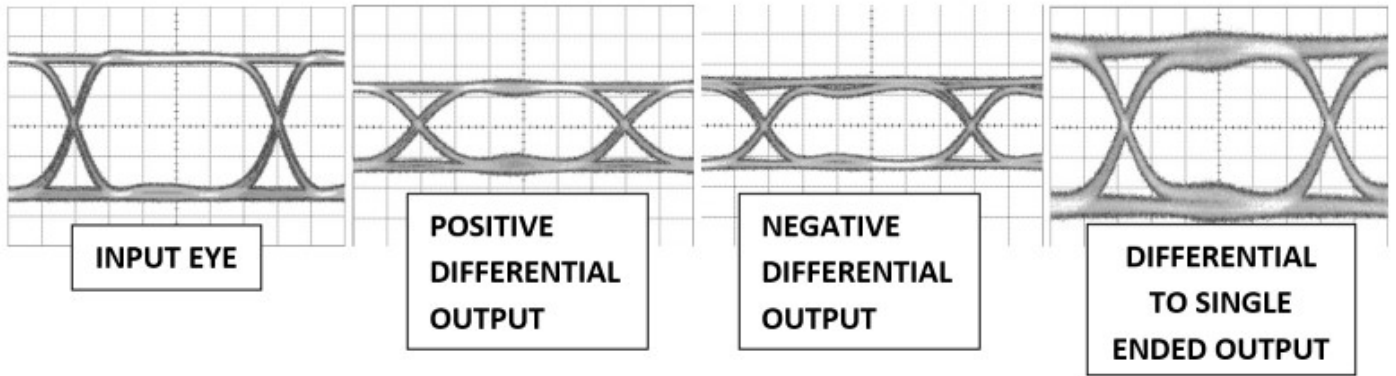







Typical Performance Scattering Parameters

Three port scattering parameters measured as three single-ended 50Ω ports showing relationship between any two ports. For example: S21 and S31, often referred to as insertion loss of a balun, is the output response on ports 2 and 3 with an input stimulus on port 1.

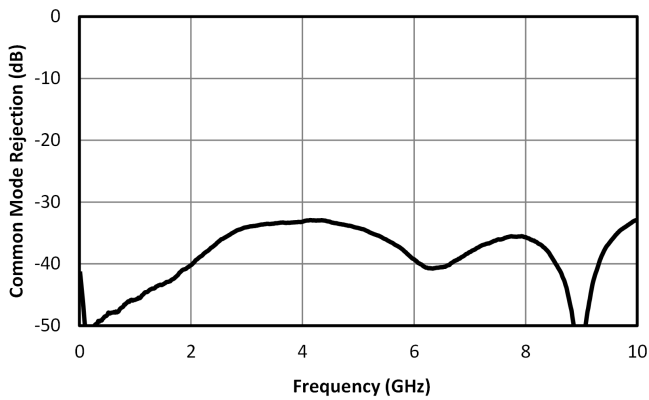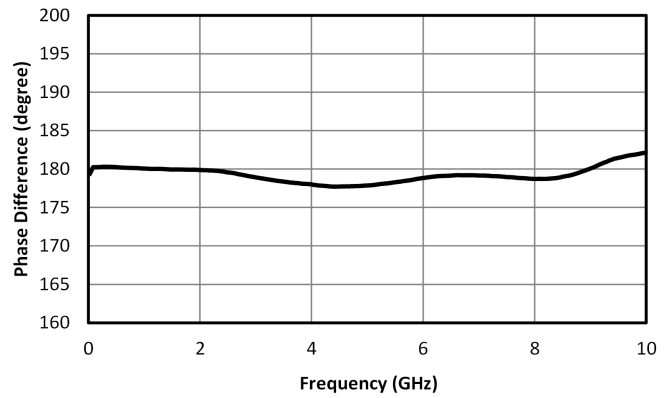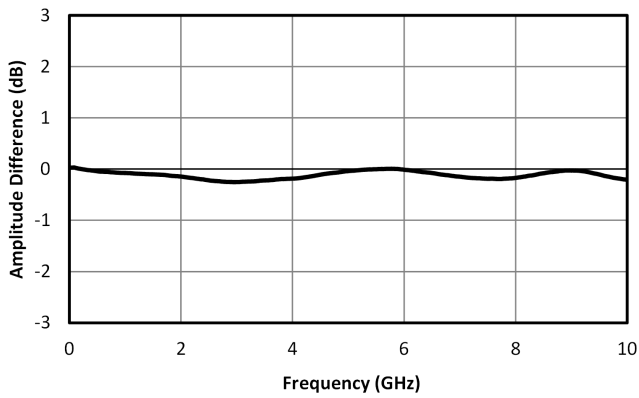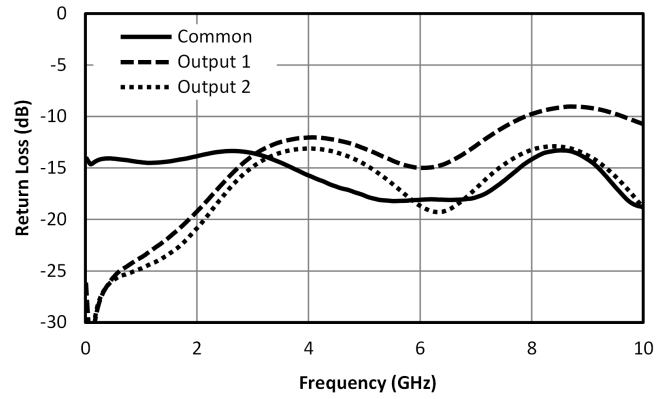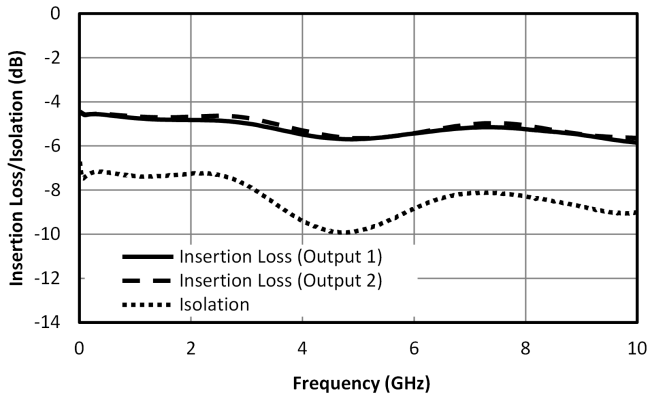




Mixed Mode Scattering Parameters

Mixed mode scattering parameters are used to characterize differential circuits. For baluns, this means that the 0° and 180° ports become a single 100Ω differential port and the common port remains the same 50Ω common port. The two-port s-parameters of the balun are then characterized based on differential (d), common mode (c), or single-ended (s) signals. For example: S12ds is the differential output response given a single ended input.

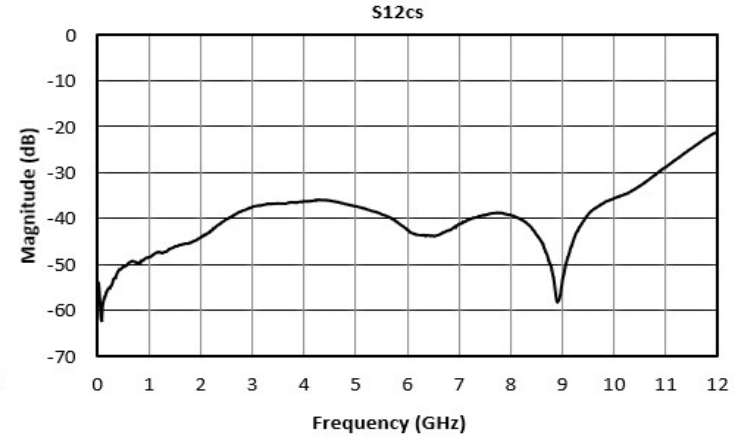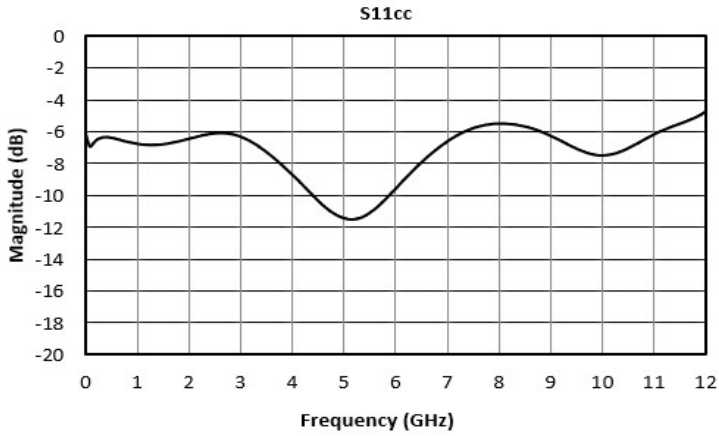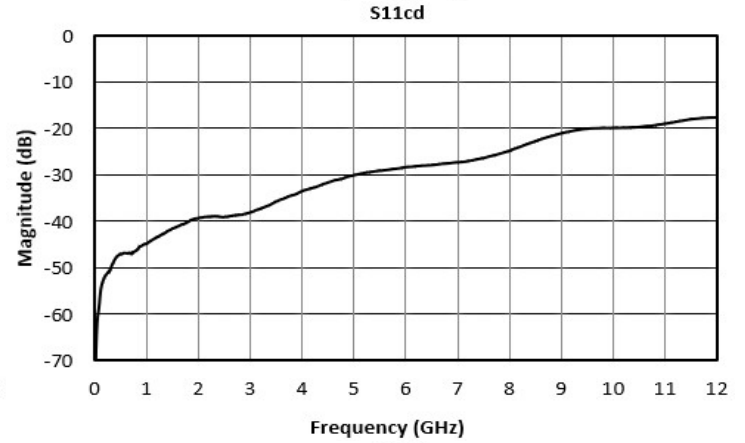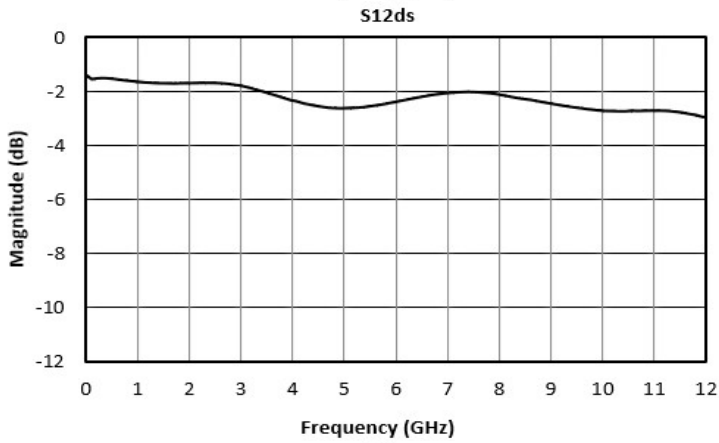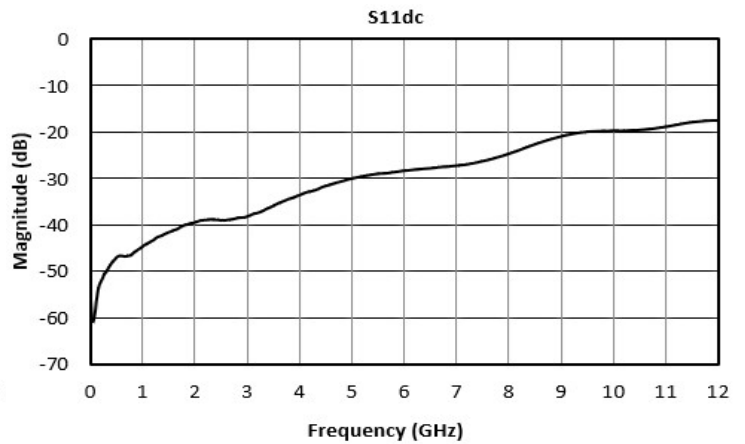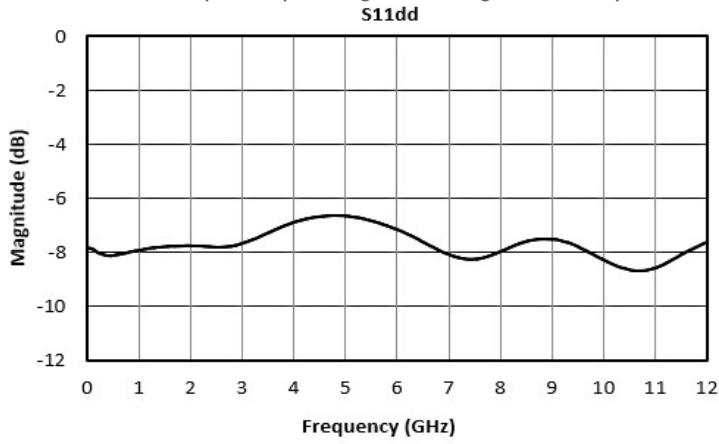

BALH-0010

High Power Balun (200 kHz to 10 GHz)

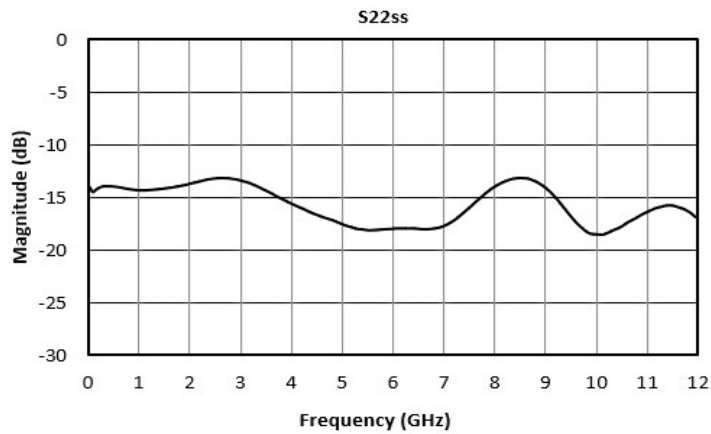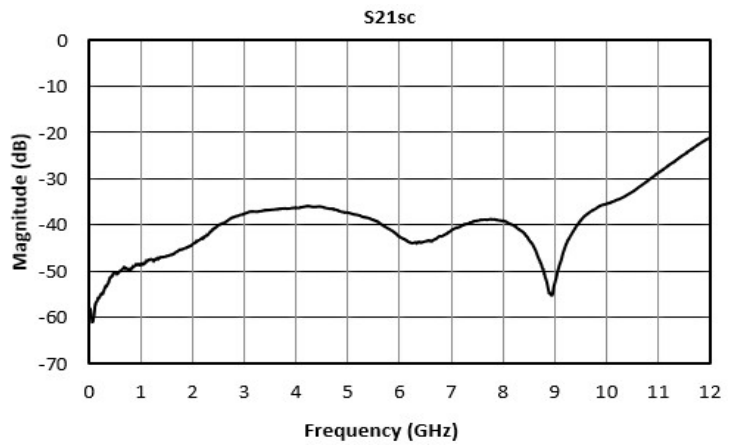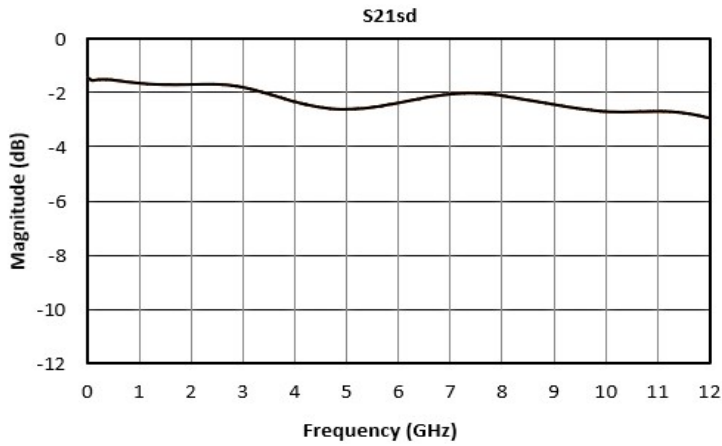

DISCLAIMER

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2015, 2019 - 2020, Marki Microwave, LLC