


BAL-0620SMG

SURFACE-MOUNT BROADBAND BALUN

DEVICE OVERVIEW

General Description

The BAL-0620SMG is a Surface Mount Microlithic™ balun. As with all Microlithic™ baluns, it features excellent amplitude balance, phase balance, and common mode rejection across a broad bandwidth and in a miniaturized form factor. It has significant isolation, reducing the reflection of unwanted common mode signals. The BAL-0620SMG is a lead free, RoHS compliant package compatible with standard leaded and lead-free solder reflows. SMA connectorized evaluation packages are available. The BAL-0620SMG is an excellent choice for balanced amplifiers, clock distribution, and higher order Nyquist sampling in analog to digital converters.




Features

- 2:1 Impedance Ratio
- 6 GHz to 20 GHz Balun (Balanced to Unbalanced Transformer)
- Transforms 50 Ω Input to 100 Ω Differential (50 Ohm Single) Output
- Tuned for Optimal Phase/Amplitude Balance

Applications

- Analog to Digital Converters
- Balanced Receivers
- Balanced Amplifiers
- Mixers
- Clock Distribution
- Signal Integrity

Functional Block Diagram

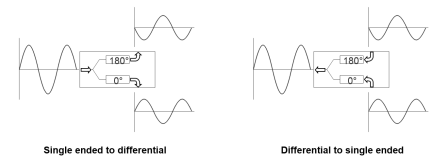

Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification	Recommended Replacement
BAL-0620SMG	SURFACE-MOUNT BROADBAND BALUN	SMG	REACH RoHS	End of Life	EAR99	MBAL-0220CSP2
EVAL-BAL-0620SM	Evaluation Board, 6 - 20 GHz Broadband Balun	EVAL	REACH RoHS	Not Recommended for New Design	EAR99	-

Table Of Contents

■ Device Overview

- General Description
- Features
- Applications
- Functional Block Diagram

■ Port Configuration and Functions

- Port Diagram
- Port Functions

■ Revision History

■ Specifications

- Absolute Maximum Ratings
- Package Information
- Electrical Specifications
- Typical Performance
- Mixed Mode Scattering Parameters

■ Mechanical Data

- Outline Drawing

■ Evaluation Board


Revision History

Revision Code	Revision Date	Comment
-	2014-01-01	Datasheet initial Release
A	2016-01-01	Typical Performance Plots Updated
B	2020-07-01	Specs table update
C	2020-10-01	Specs table update
D	2024-07-31	Product Lifecycle Update to EOL




EOL

Port Configuration and Functions

Port Diagram

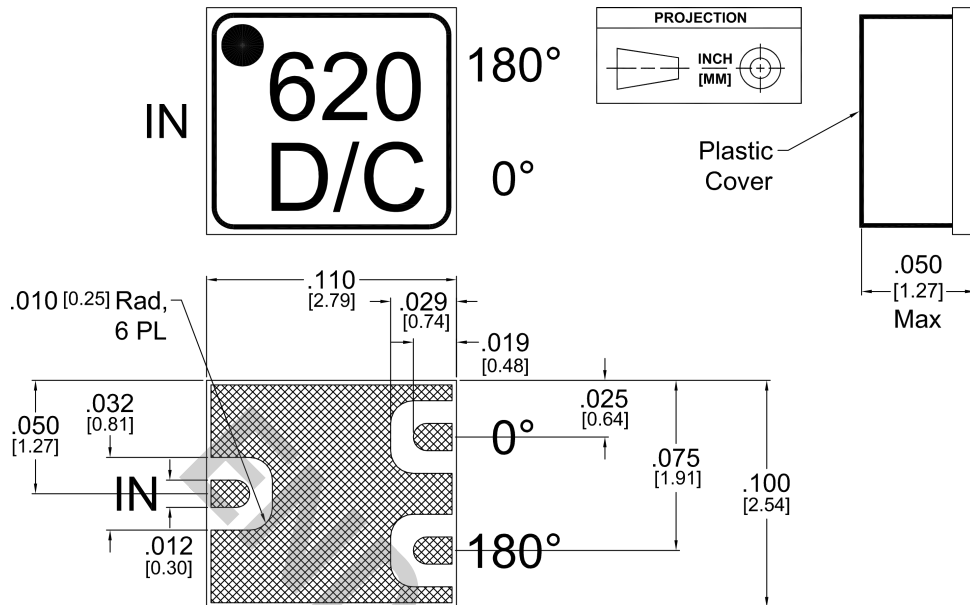

Port Functions

Port	Function	Description	DC Equivalent Circuit
0° Port (Balanced)	0° Port	The 0o port is DC short to the 180o port and passes through a resistor to ground.	
180° Port (Balanced)	180° Port	The 180o port is DC short to the 0o port and passes through a resistor to ground.	
Common Port (Unbalanced)	RF Input	The common port is DC open to ground.	

Specifications

Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
RF Power Handling	1	W

Package Information

Parameter	Details	Rating
Dimensions	-	2.79 x 2.54 mm
Moisture Sensitivity Level	-	MSL 1

END OF LIFE

Electrical Specifications







Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Impedance Ratio	-	-	-	-	2:1	-	
Amplitude Balance	-	6	20	-	0.2	0.6	°
Common Mode Rejection	-	6	18	28	34	-	dB
Common Mode Rejection	-	18	20	20	31	-	dB
Insertion Loss as a Mode Converter ¹	-	6	20	-	2.6	4.2	dB
Isolation	-	-	-	-	14	-	dB
Nominal Phase Shift	-	6	20	-	180	-	°
Phase Balance	-	18	20	-	4	15	°
Phase Balance	-	6	18	1	-	5	°
VSWR	-	-	-	-	2	-	

^[1] Includes fixture losses.







END OF LIFE

Typical Performance

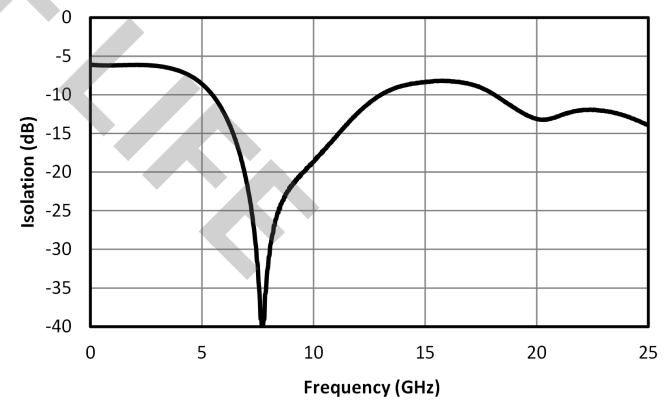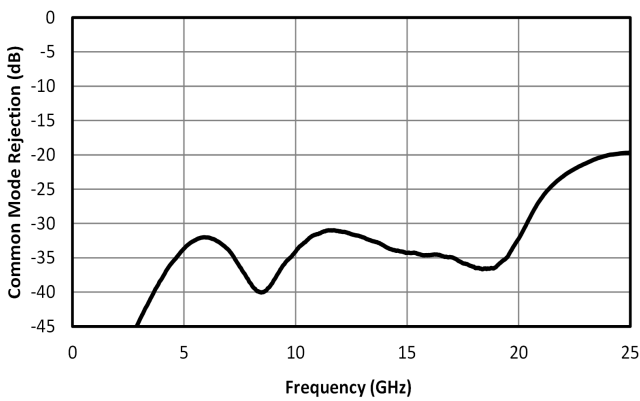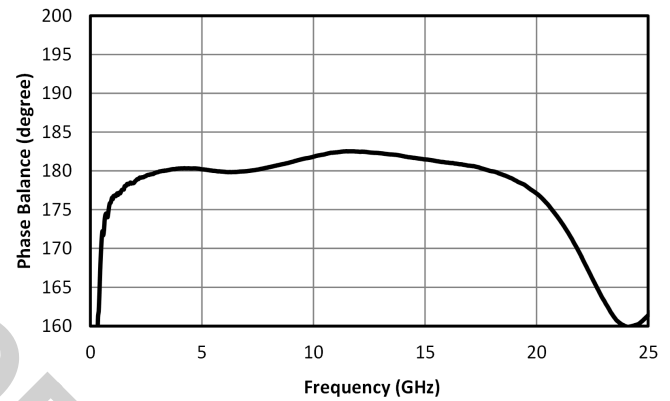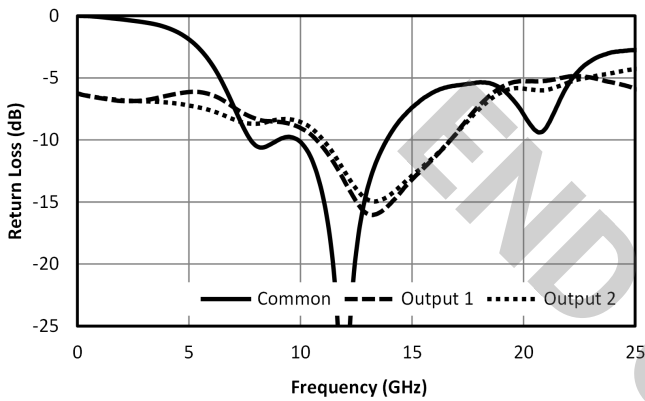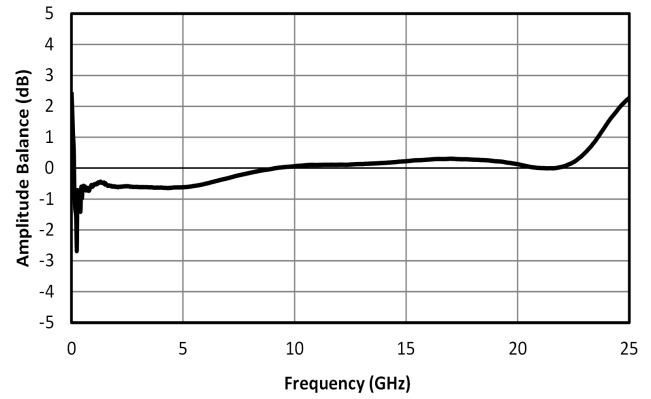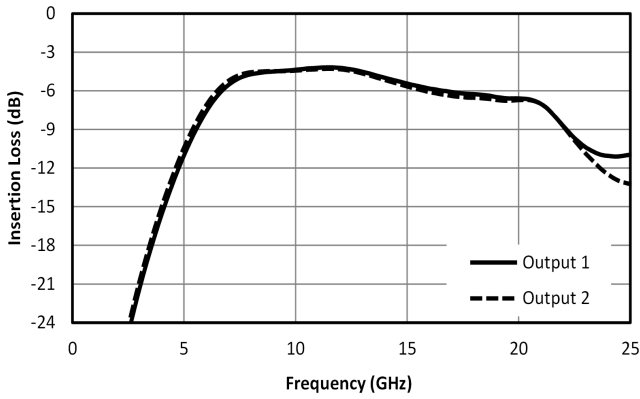

Mixed Mode Scattering Parameters


Mixed mode scattering parameters are used to characterize differential circuits. For baluns, this means that the 0° and 180° ports become a single 100Ω differential port and the common port remains the same 50Ω common port. The two-port s-parameters of the balun are then characterized based on differential (d), common mode (c), or single-ended (s) signals. For example: S_{cs12} is the Common output response given a single ended input.

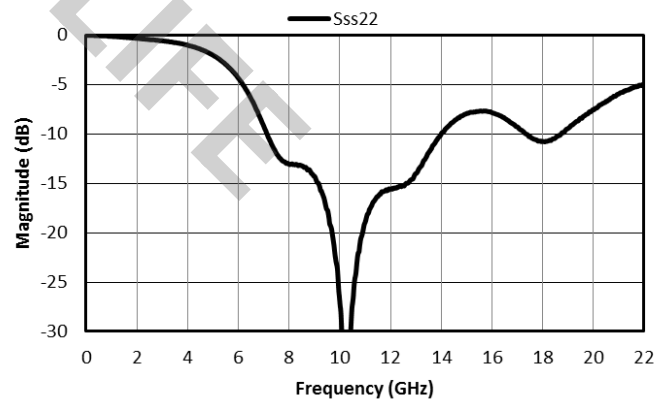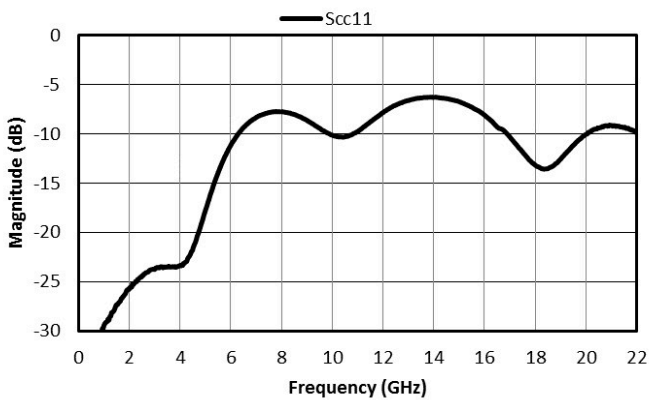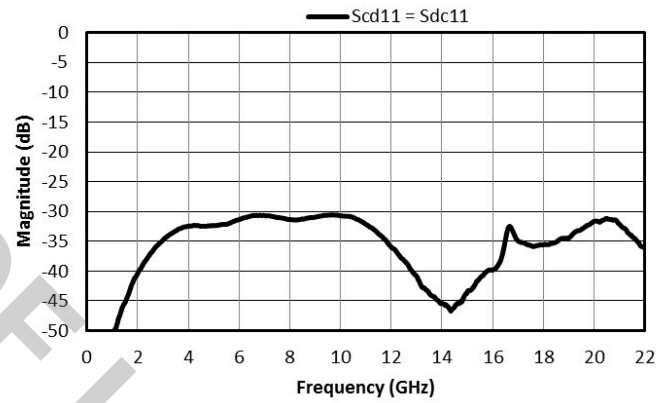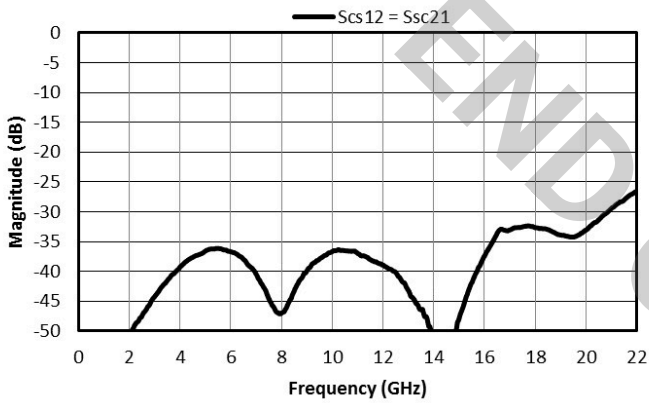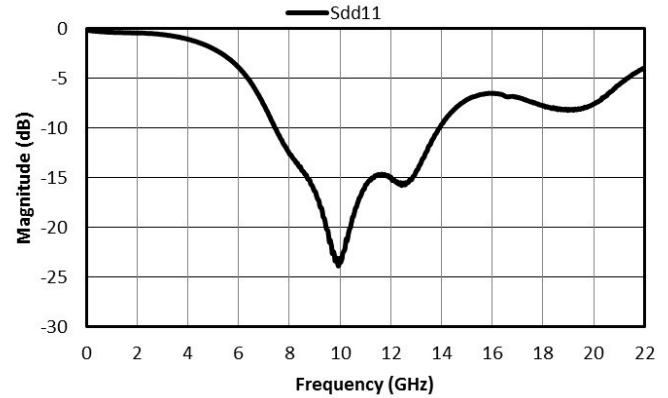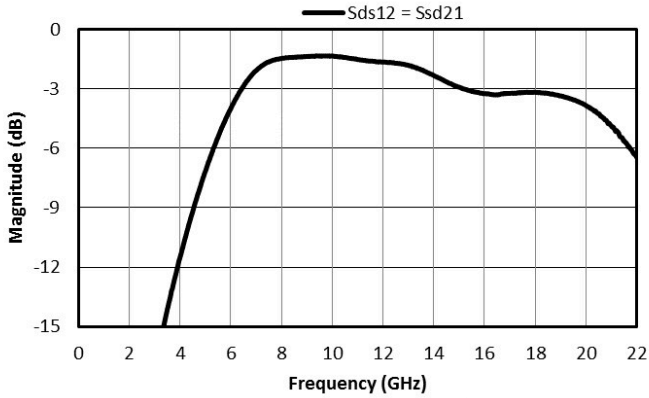

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

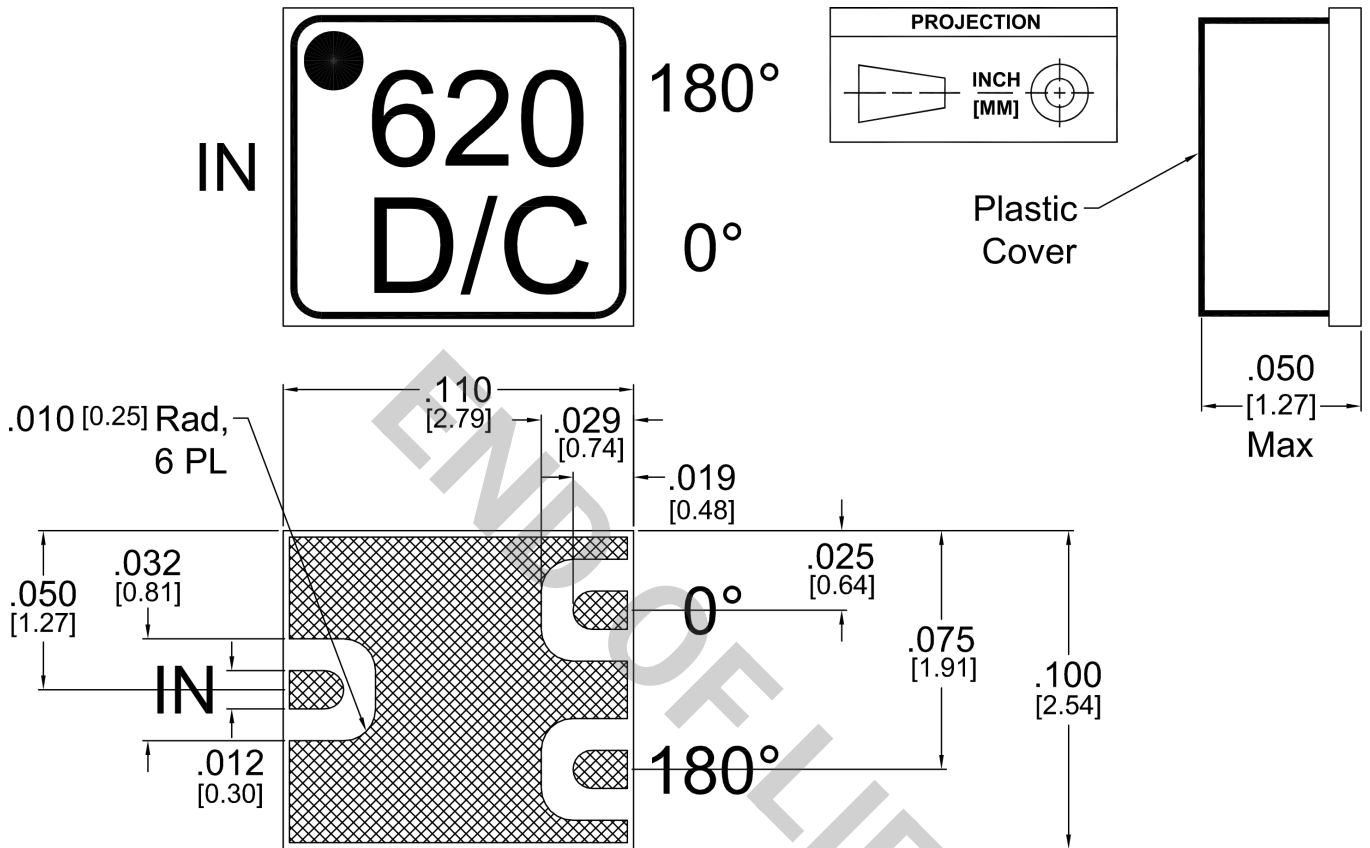

DISCLAIMER

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2014, 2016, 2020, 2024, Marki Microwave, LLC

END OF LIFE