

AMM2-0070UH

10 MHz - 70GHz, Broadband High Gain Distributed Amplifier

DEVICE OVERVIEW

General Description

The AMM2-0070UH is a ultra-broadband high gain amplifier capable of delivering high 18 dB gain over a 10 MHz to 70 GHz frequency range. The AMM2-0070UH features excellent 20 dB return losses, a positive gain slope response and 4.5 dB noise figure. This amplifier is housed in a 1" x 1.7" connectorized module and operates with a single positive bias supply without the need for sequencing.




Features

- Ultra-Broadband 10 MHz - 70 GHz Operation
- Gain, 18 dB typ
- Positive Gain Slope
- Noise Figure, 4 dB typ
- Internal Voltage Sequencer
- Single-Supply, Positive-Only Bias, 5.5 to 20 V

Applications

- Test and Measurement Equipment
- SATCOM
- LO signal chain for mmWave mixers
- Radar
- Electronic warfare equipment
- Aerospace and Defense

Functional Block Diagram

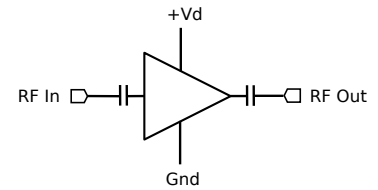

Part Ordering Options

Part Number	Description	Package	Connectors	Green Status	Product Lifecycle	Export Classification
AMM2-0070UH	10 MHz - 70GHz, Broadband High Gain Distributed Amplifier	UH	-	REACH RoHS	Released	EAR99

AMM2-0070UH

10 MHz - 70GHz, Broadband High Gain Distributed Amplifier

Table Of Contents

■ Device Overview

- General Description
- Features
- Applications
- Functional Block Diagram

■ Port Configuration and Functions

- Port Diagram
- Port Functions

■ Revision History

■ Specifications

- Absolute Maximum Ratings
- Package Information
- Recommended Operating Conditions
- Electrical Specifications
- Typical Performance Plots

■ Mechanical Data

- Outline Drawing

Revision History

Revision Code	Revision Date	Comment
-	2025-10-06	Initial Release


AMM2-0070UH

10 MHz - 70GHz, Broadband High Gain Distributed Amplifier




Port Configuration and Functions

Port Diagram

The port diagram of the AMM2-0070UH is shown below.

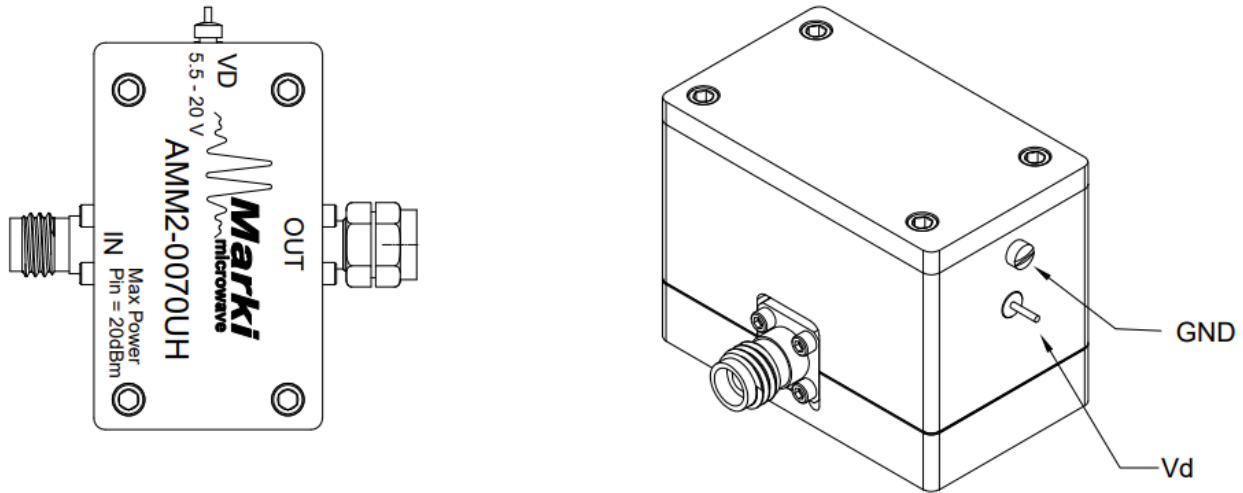

Port Functions

Port	Function	Connector Type	Description	DC Equivalent Circuit
GND	Ground	-	Ground Connection for UH Module	
RF In	RF Input	1.85F	RF input port to the module. This port is internally DC blocked and matched to 50 Ohms.	
RF Out	RF Output	1.85M	RF output port to module. This port is internally DC blocked and matched to 50 Ohms.	
Vd	Positive DC Supply Voltage	-	This pin provides DC power to the amplifier. DC voltage at this pin should be set to 5.5V to 20V for normal operation.	-

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may become inoperable or have a reduced lifetime. Reliability limits are individual, instantaneous catastrophic limits only. Functional operation limits are indicated below. Operation of the device at multiple absolute maximum limits or for extended periods at a single limit can cause degradation and damage to the device.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature for MTTF > 1E6 hours	85	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature for MTTF > 1E6 hours	-40	°C
Minimum Storage Temperature	-65	°C
Power Supply DC Voltage (Vd)	20	V
RF Input Power	20	dBm

Package Information

Parameter	Details	Rating
Dimensions	-	25.2 x 42.6 mm

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the Electrical Specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Input Power for Saturation	-	-4	-	dBm
Power Supply DC Current (Id) ¹	-	108	-	mA
Power Supply DC Voltage (Vd) ²	5.5	8	20	V

[1] Recommended operating current condition without RF input applied.

[2] Device can be biased anywhere from 5.5V to 20V and retain all electrical performance. Power consumption increases with higher bias voltage

AMM2-0070UH







10 MHz - 70GHz, Broadband High Gain Distributed Amplifier

Electrical Specifications

Performance shown measured with 8V bias. Due to in module linear regulator, performance is independent to bias voltage within recommended operating conditions.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Input Return Loss	5.5V < Vd < 20V, Pin=-20dBm	0.01	67	-	20	-	dB
Noise Figure	5.5V < Vd < 20V	30	50	-	5	-	dB
Noise Figure	5.5V < Vd < 20V	1	10	-	5	-	dB
Noise Figure	5.5V < Vd < 20V	10	30	-	4	-	dB
Output IP3	5.5V < 5V < 20V	40	67	-	17	-	dBm
Output IP3	5.5V < Vd < 20V	0.01	40	-	20	-	dBm
Output P1dB	5.5V < Vd < 20V	0.01	30	-	11	-	dBm
Output P1dB	5.5V < Vd < 20V	30	67	-	6	-	dBm
Output Return Loss	5.5V < Vd < 20V, Pin=-20dBm	0.01	67	-	15	-	dB
Reverse Isolation	5.5V < Vd < 20V, Pin=-20dBm	0.01	67	-	60	-	dB
Small Signal Gain	5.5V < Vd < 20V, Pin=-20dBm	0.01	67	-	18	-	dB

Typical Performance Plots

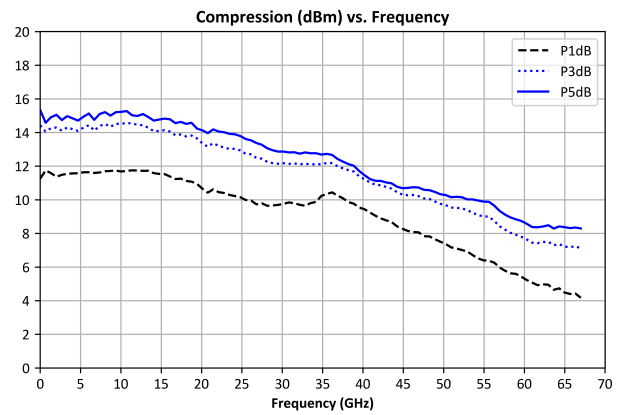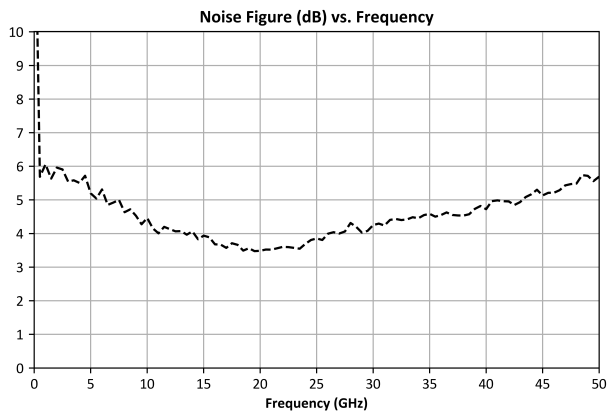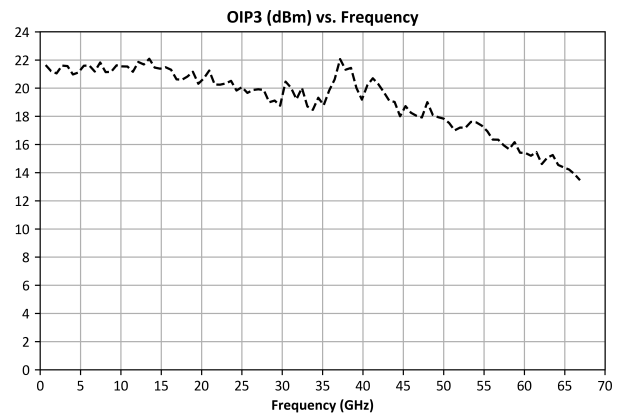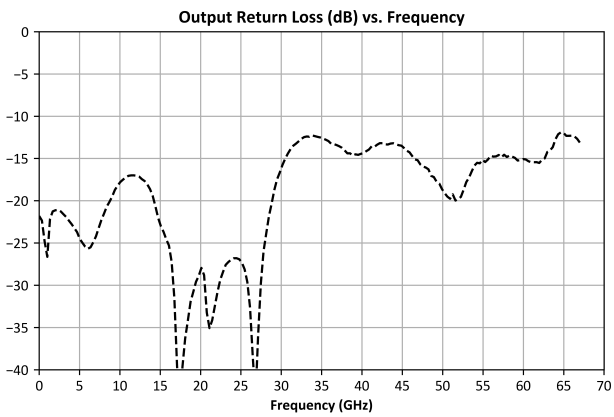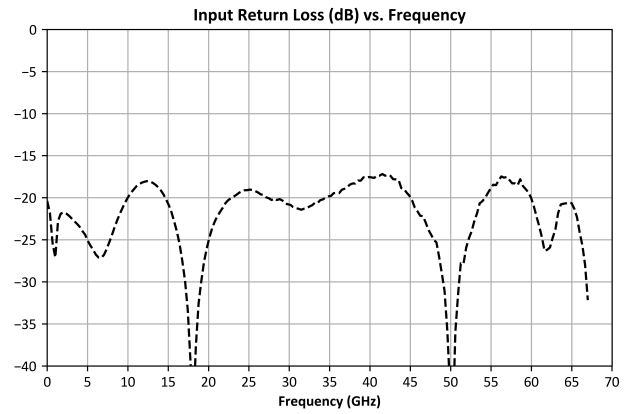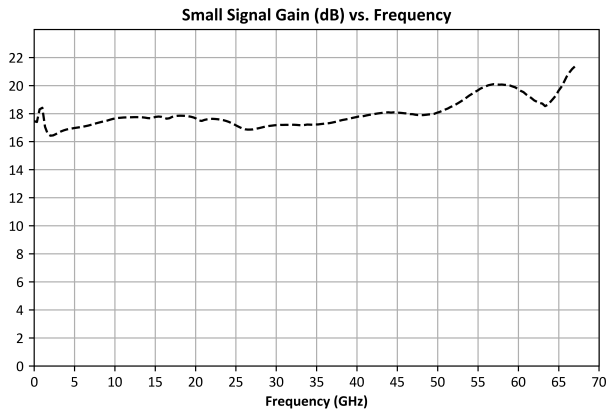

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2025, Marki Microwave, Inc