


# MMIQ-4067LU

## Passive GaAs MMIC IQ Mixer

### DEVICE OVERVIEW

#### General Description

MMIC IQ mixer. This is an ultra-broadband mixer spanning 40 to 67 GHz on the RF and LO ports with an IF from DC to 20 GHz. Up to 25 dB of image rejection is available due to the excellent phase and amplitude balance of its on-chip LO quadrature hybrid. This product is available as a connectorized module. Contact factory for information regarding wire bondable die.




#### Features

RF/LO Frequency Range: 40 - 67 GHz  
 IF Frequency Range: DC - 20 GHz  
 I+Q Conversion Loss: 9 dB  
 Image Rejection: 35 dB  
 LO-RF Isolation: 33 dB

#### Applications

- Single Sideband and Image Rejection Mixing
- IQ Modulation / Demodulation
- Vector Amplitude Modulation
- Band Shifting

#### Functional Block Diagram



#### Part Ordering Options

Part Number	Description	Package	Connectors	Green Status	Product Lifecycle	Export Classification
MMIQ-4067LU	Passive GaAs MMIC IQ Mixer	U	<u>Standard</u>	REACH RoHS	Released	EAR99

**Table Of Contents**

- **Device Overview**
  - General Description
  - Features
  - Applications
  - Functional Block Diagram
- **Port Configuration and Functions**
  - Port Diagram
  - Port Functions
- **Revision History**
- **Specifications**
  - Absolute Maximum Ratings
  - Package Information
  - Recommended Operating Conditions
  - Sequencing Requirements
  - Electrical Specifications
  - Typical Performance Plots
- **Mechanical Data**
  - Outline Drawing


**Revision History**

Revision Code	Revision Date	Comment
-	2018-04-01	Datasheet Initial Release
A	2019-10-01	Updated Max Power Spec






## Port Configuration and Functions

### Port Diagram

A top-down view of the MMIQ-4067L's U package outline drawing is shown below. The mixer may be operated as either a downconverter or an upconverter. Use of the RF or IF as the input or output port will depend on the application.

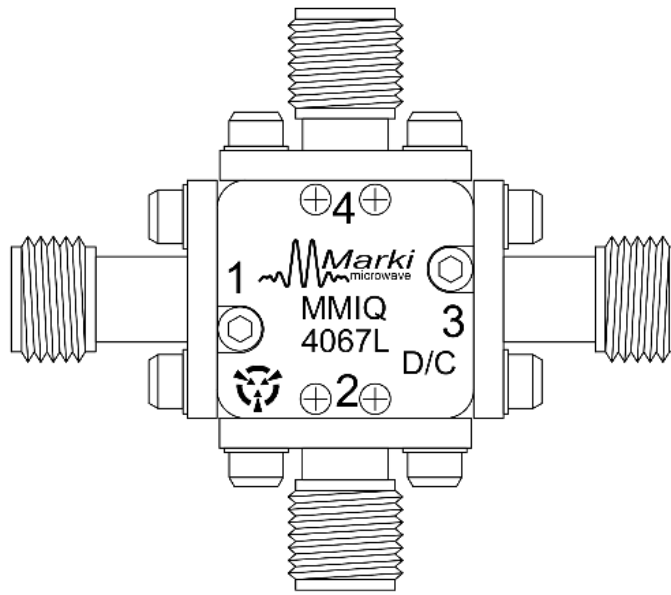

### Port Functions

Port	Function	Connector Type	Description	Equivalent Circuit for Package
GND	Ground	-	U package ground path is provided through the metal housing and outer coax conductor.	<b>GND</b> 
Port 1	LO Input	1.85F	Port 1 is DC open and AC matched to 50Ω over the specified RF frequency range.	<b>P1</b> 
Port 2	I Input / Output	SMAF	Port 2 is DC open and AC matched to 50Ω over the specified LO frequency range.	<b>P2</b> 
Port 3	RF Input / Output	1.85F	Port 3 is diode coupled and AC matched to 50Ω over the specified I port frequency range.	<b>P3</b> 
Port 4	Q Input / Output	SMAF	Port 4 is diode coupled and AC matched to 50Ω over the specified Q port frequency range.	<b>P4</b> 

## Specifications

### Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Port 2 DC Current	50	mA
Port 4 DC Current	50	mA
Power Handling, at any Port	26	dBm

### Package Information

Parameter	Details	Rating
Weight	Package name: U	14.5g
Dimensions	-	14.22 x 13.21 mm

### Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
LO Input Power	11	15	20	dBm
RF/IF Input Power	-	-	6	dBm
Ambient Temperature	-55	25	100	°C

### Sequencing Requirements

There is no requirement to apply power to the ports in a specific order. However, it is recommended to provide a 50Ω termination to each port before applying power. This is a passive diode mixer that requires no DC bias.

## Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for a down conversion application with a +15dBm sine wave LO input. Min and Max limits apply only to our connectorized units and are guaranteed at TA=+25°C. All bare die are 100% DC tested and visually inspected.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Conversion Loss <sup>1</sup>	RF/LO = 40 - 67 GHz: I = 0.2 - 20 GHz	40	67	-	14	-	dB
Conversion Loss <sup>2</sup>	RF/LO = 40 - 67 GHz I = DC - 0.2 GHz	40	67	-	12	-	dB
Conversion Loss <sup>3</sup>	RF/LO = 40 - 67 GHz Q = 0.2 - 20 GHz	40	67	-	14	-	dB
Conversion Loss	RF/LO = 40 - 67 GHz: Q = DC - 0.2 GHz	40	67	-	12	-	dB
IF Frequency Range	-	-	-	0	-	20	GHz
Image Rejection <sup>4</sup>	RF/LO = 40 - 67 GHz I+Q = DC - 0.2 GHz	40	67	-	35	-	dBc
Input IP3 <sup>5</sup>	RF/LO = 40 - 67 GHz I = DC - 0.2 GHz	40	67	-	19	-	dBm
Isolation, LO to IF	IF/LO = 40-67 GHz	40	67	-	40	-	dB
Isolation, LO to RF	RF/LO = 40-67 GHz	40	67	-	33	-	dB
Isolation, RF to IF	RF/IF = 40-67 GHz	40	67	-	37	-	dB
LO Frequency Range	-	-	-	40	-	67	GHz
Noise Figure <sup>6</sup>	RF/LO = 40 - 67 GHz I = DC - 0.2 GHz	40	67	-	12	-	dB
Noise Figure <sup>7</sup>	RF/LO = 40 - 67 GHz Q = DC - 0.2 GHz	40	67	-	12	-	dB
Q (Port 4) Frequency Range	-	-	-	0	-	20	GHz
RF Frequency Range	-	-	-	40	-	67	GHz

[1][2][3] Measured as an I/Q down converter. (i.e., I and Q powers are not combined)







[4] Image Rejection and Single sideband performance plots are defined by the upper sideband (USB) or lower sideband (LSB) with respect to the LO signal. Plots are defined by which sideband is selected by the external IF quadrature hybrid.









[5] Typical IIP3 measured with I and Q ports combined with an external quadrature hybrid coupler.





[6][7] Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.

**Typical Performance Plots**

I output means that the IF output signal is measured at the I port of the mixer and the Q port is loaded. Q output means the IF output signal is measured at the Q port of the mixer while the I port is loaded.

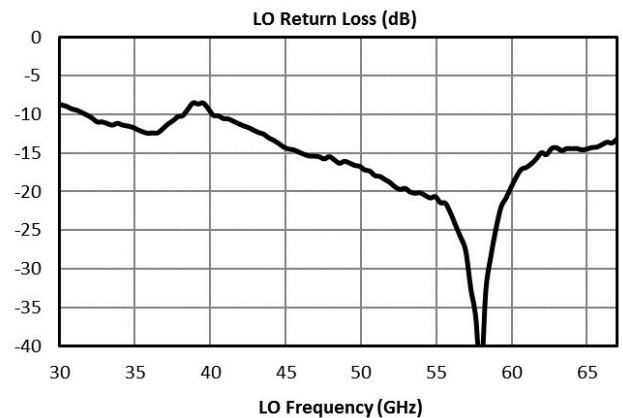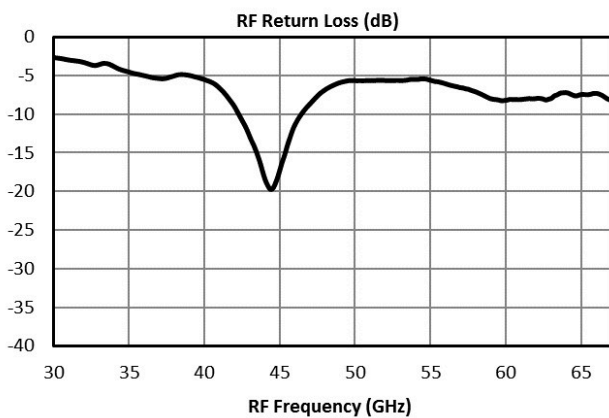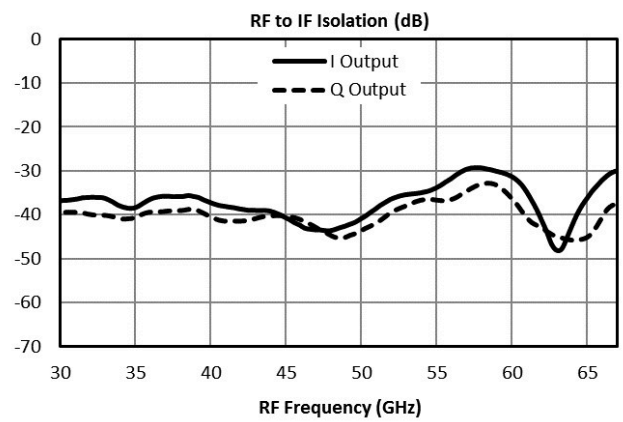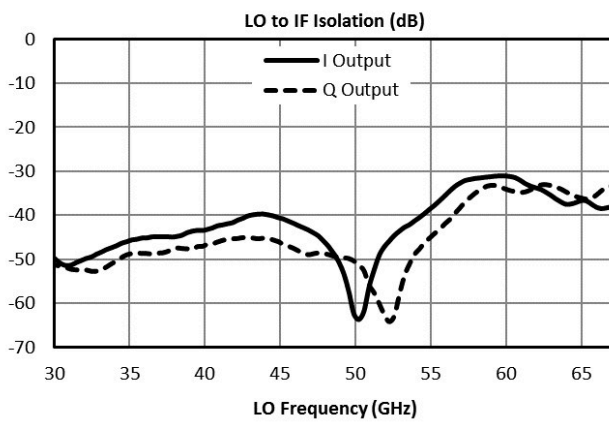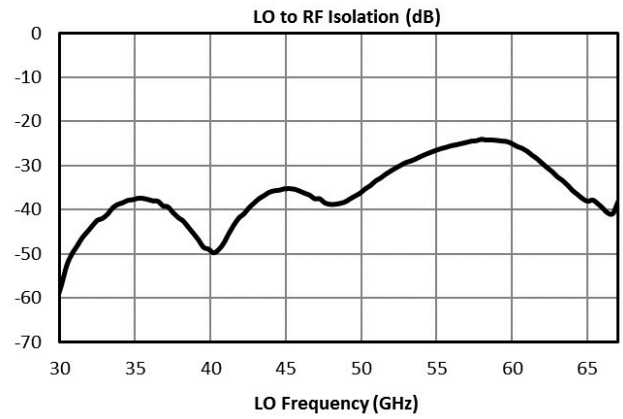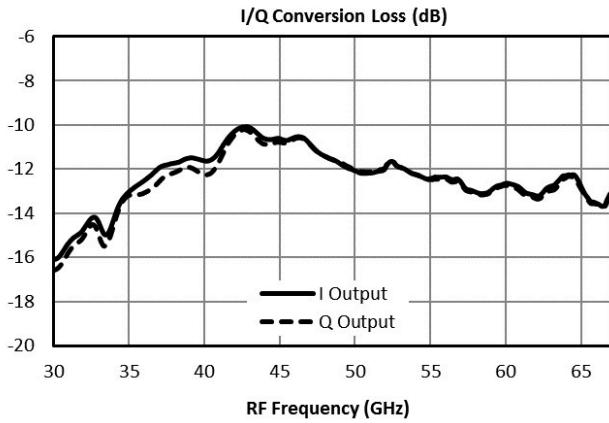

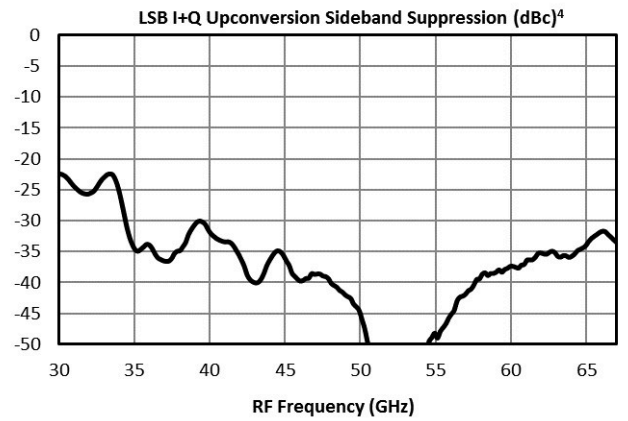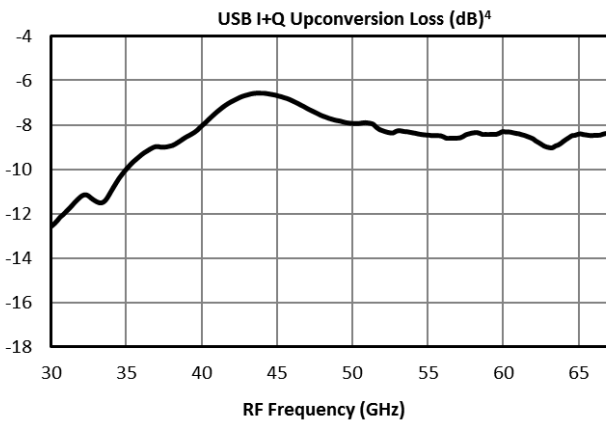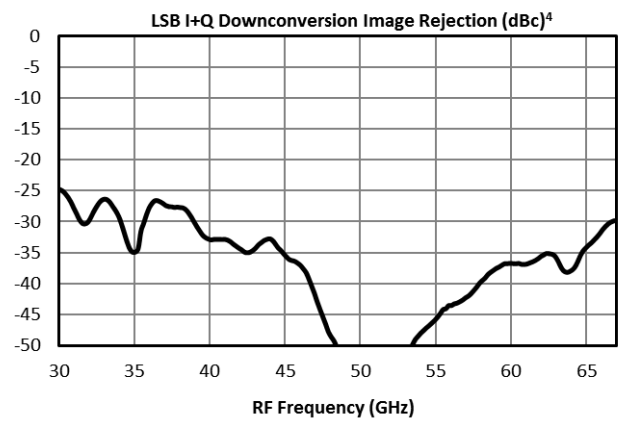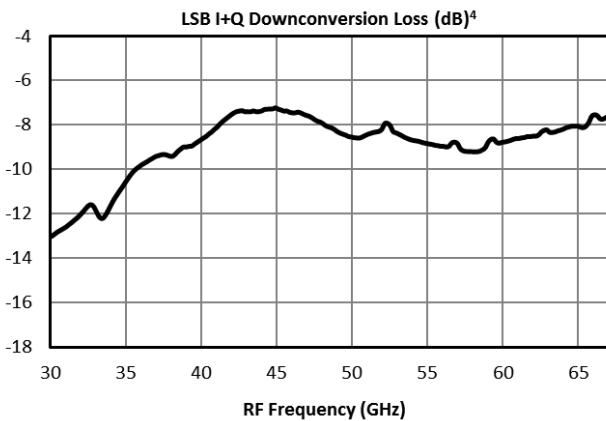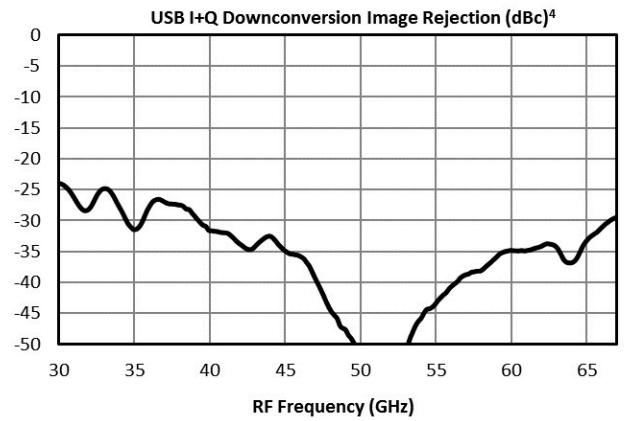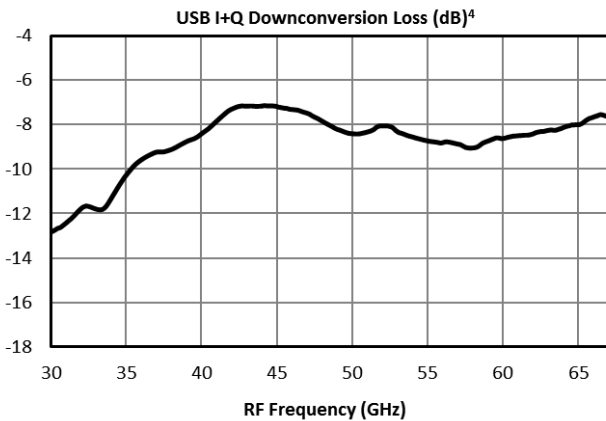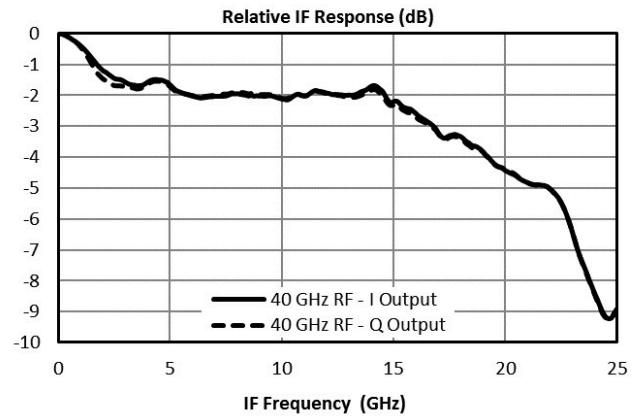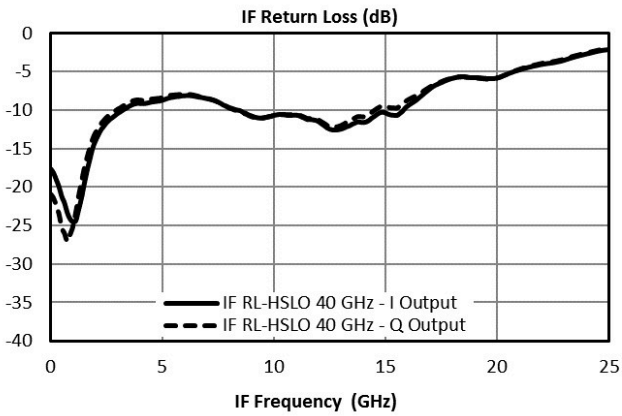


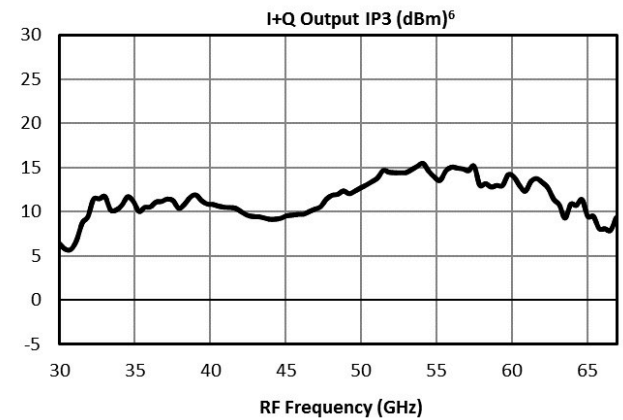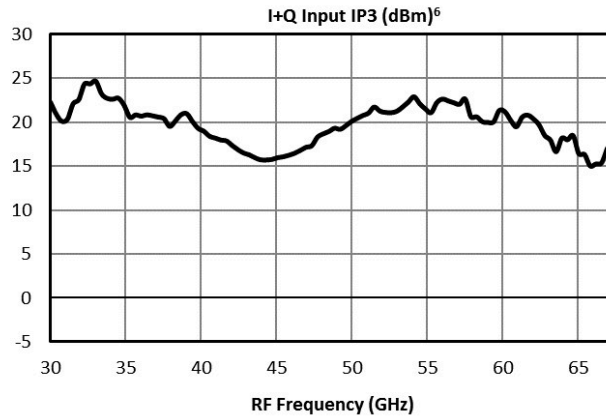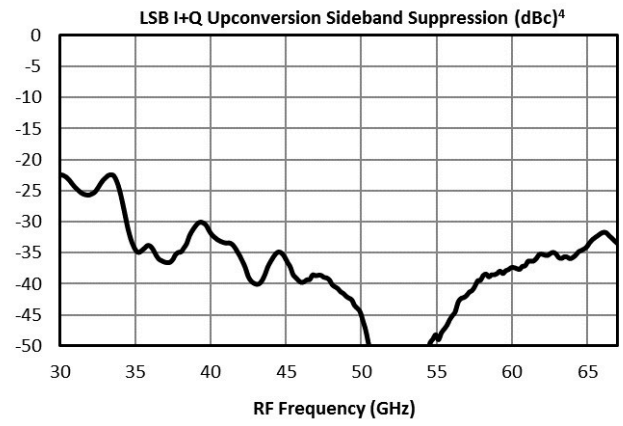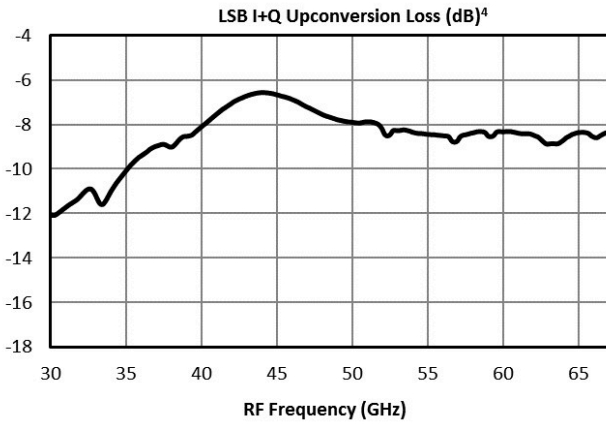

**Mechanical Data**

**Outline Drawing**

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

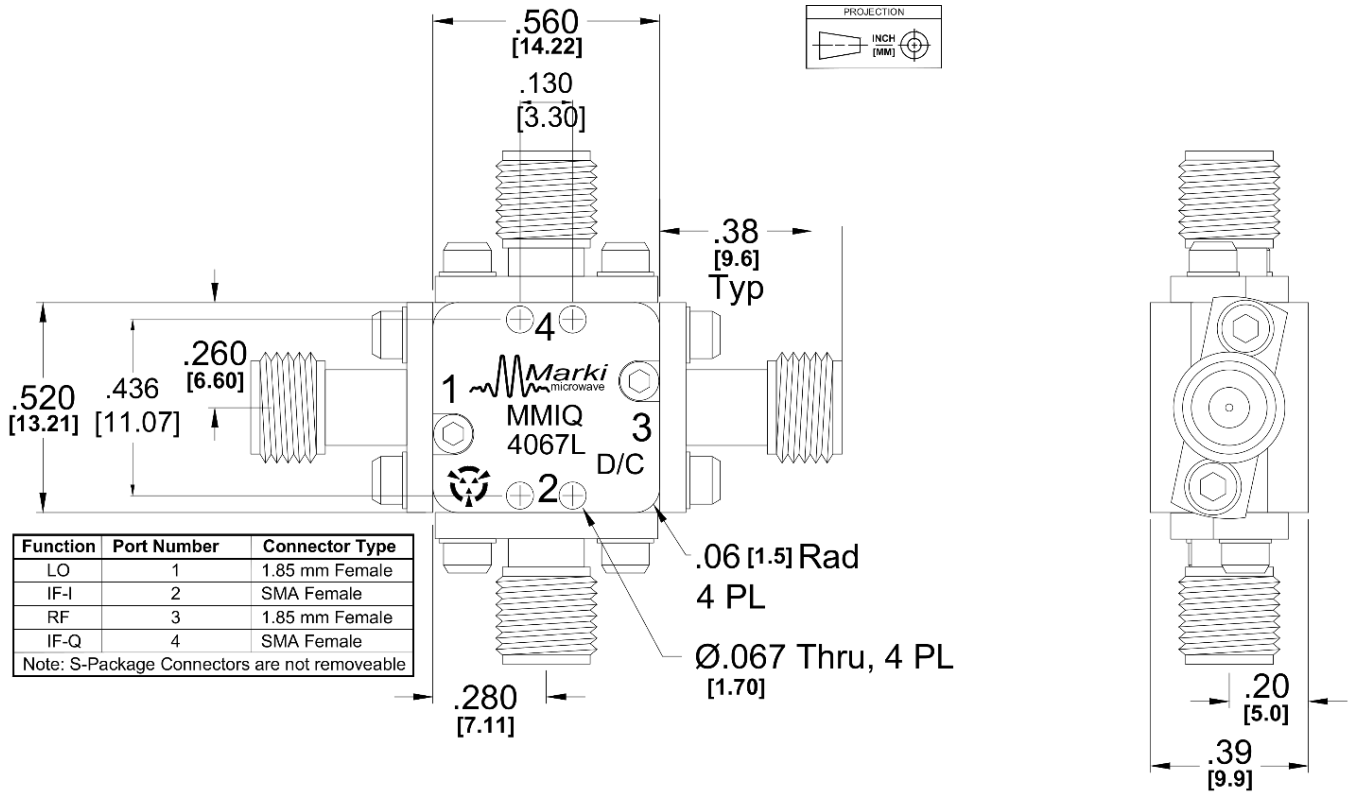

**DISCLAIMER**

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2018 - 2019, Marki Microwave, Inc