




215 Vineyard Court, Morgan Hill, CA 95037
 PHONE (408) 778-4200 FAX (408) 778-4300
 Website: MarkiMicrowave.com

It is recommended that the negative bias be applied before or concurrent with the positive bias.

Weight: <1 gram typ

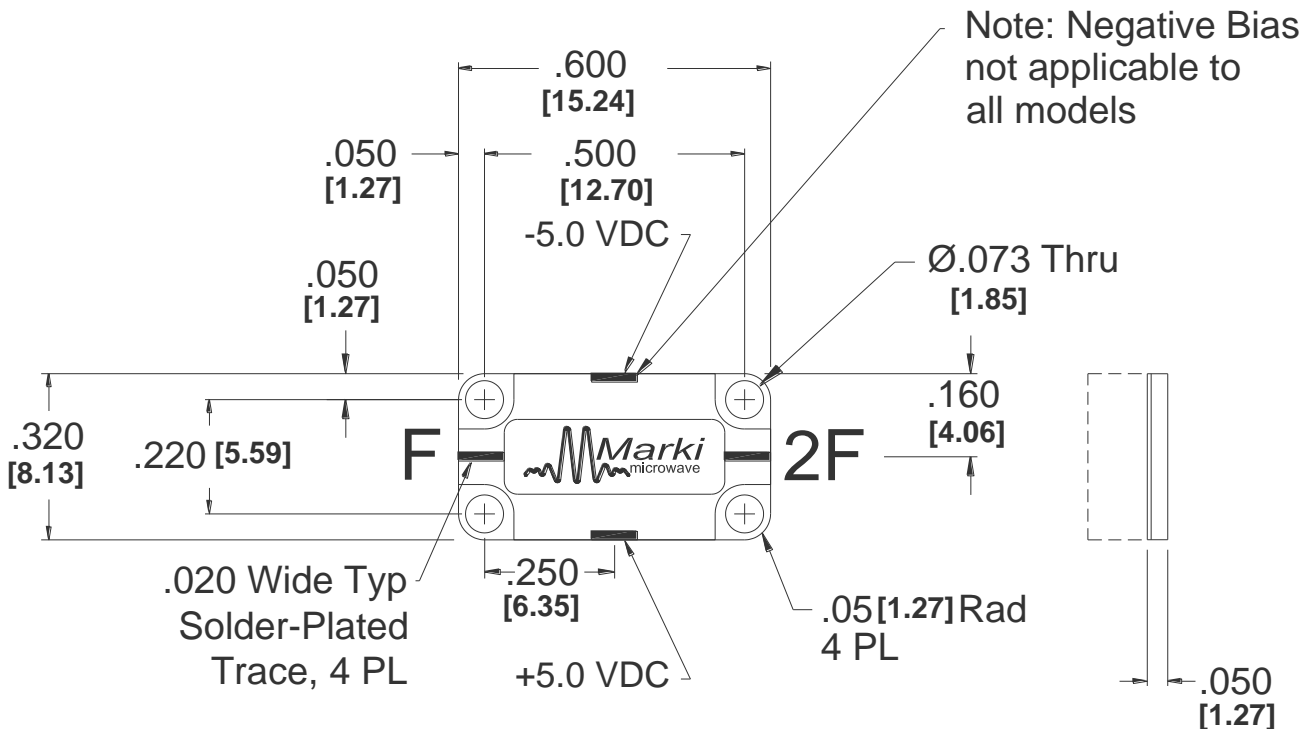


Recommended Clearance

.10 min
[2.5]

Gold-plated kovar bonding pads are available.

E-Style Amplified-Doubler Outline

Projection



XXX=±.005
XX=±.02

E-Carrier I/O trace finish is reflowed Sn63/Pb37 solder plate over Cu.
 E-Carrier is Half Hard Brass, plated Electroless Nickel 150-250 μ-inches, followed by Nickel Flash.
 Click on links for [suggested System layout](#) and [Carrier Mounting](#) notes.