

# MEQ6-20CSP1

## Chip Scale Package MMIC 20 GHz 6 dB Equalizer

### DEVICE OVERVIEW

#### General Description

The MEQ6-20CSP1 is a passive MMIC equalizer CSP ideal for compensating for low pass filtering effects in RF/microwave and high speed digital systems. The MEQ6-20CSP1 provides 5.6dB positive slope equalization from DC to 20GHz with a DC attenuation of 6dB. The chip scale package allows for extreme miniaturization of the SMT footprint. The unique design offers superior 25dB return loss to competitors in an extremely small footprint. GaAs MMIC technology provides consistent unit-to-unit performance in a small, low cost form factor.



[Download s-parameters here](#)

#### Features

- Small 1.5 x 1.5 mm package size
- DC attenuation of 6dB
- Typical Insertion Loss 0.5dB at 20GHz
- Typical VSWR of 1.12 Over Operating Band
- Low SWaP
- This product embodies Marki Microwave's U.S. Pat. 11,869,858.

#### Applications

- RF Transceivers
- High-Speed Data
- Telecom
- Cable Loss Compensation
- Amplifier Compensation

#### Functional Block Diagram



#### Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MEQ6-20CSP1	Chip Scale Package MMIC 20 GHz 6 dB Equalizer	CSP1	REACH RoHS	Released	EAR99
<a href="#">EVB-MEQ6-20</a>	Evaluation Board, Chip Scale Package MMIC 20 GHz Equalizer	EVB	REACH RoHS	Released	EAR99

## MEQ6-20CSP1

### Chip Scale Package MMIC 20 GHz 6 dB Equalizer

#### Table Of Contents

- **Device Overview**
  - General Description
  - Features
  - Applications
  - Functional Block Diagram
- **Port Configuration and Functions**
  - Port Diagram
  - Port Functions
- **Revision History**
- **Specifications**
  - Absolute Maximum Ratings
  - Package Information
  - Electrical Specifications
  - Typical Performance Plot
- **Mechanical Data**
  - Outline Drawing
- **Footprint Image**
- **Evaluation Board**
  - Evaluation Board Outline Drawing


#### Revision History

Revision Code	Revision Date	Comment
-	2025-06-13	Initial Release




## Port Configuration and Functions

### Port Diagram

An x-ray view of the MEQ6-20CSP1 package outline drawing is shown below. The MEQ equalizers are symmetrical allowing Port 1 or Port 2 to be used as the input.

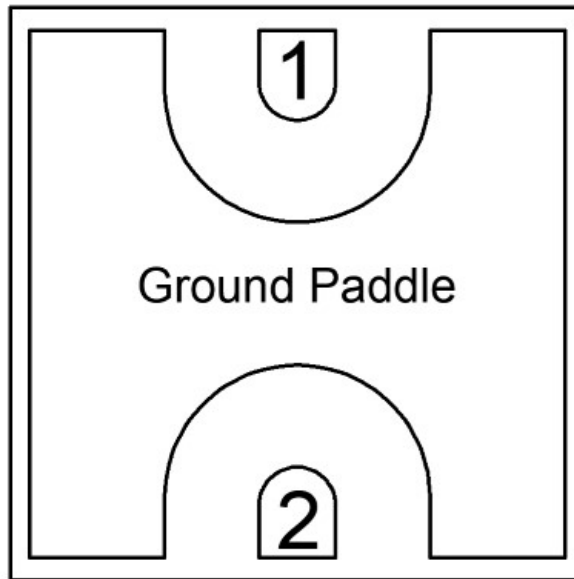

### Port Functions

Port	Function	Description	DC Equivalent Circuit
GND	Ground	SM package ground path is provided through the ground paddle.	Pad 
Pin 1	Input/Output	Pin 1 is DC connected to ground through a resistor. DC block is required if voltage present.	P1 
Pin 2	Input/Output	Pin 2 is DC connected to ground through a resistor. DC block is required if voltage present.	P2 

## Specifications

### Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C

### Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Weight	Package name: CSP1	0.04g
Dimensions	-	1.50 x 1.50 mm
Moisture Sensitivity Level	-	MSL 3




**Electrical Specifications**

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the equalizer in a SM package with a sine wave input applied to port 1. Min and Max limits are guaranteed at TA=+25°C. All bare die are 100% DC tested and visually inspected.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Insertion Loss at DC	Configuration A, Temp = 25°C	0	0	-	6.0	-	dB
Insertion Loss	Configuration A, Temp = 25°C	10	10	-	3.3	-	dB
Insertion Loss	Configuration A, Temp = 25°C	20	20	-	0.5	-	dB
Equalization Value <sup>1</sup>	Configuration A, Temp = 25°C	0	20	-	5.6	-	dB
Return Loss	Configuration A, Temp = 25°C	0	20	-	25	-	dB
Group Delay	Configuration A, Temp = 25°C	0	20	-	15	-	ps

<sup>[1]</sup> Equalization Value = Max Insertion Loss - Min Insertion Loss  
 Equalizer is symmetrical. Reverse measurement is equivalent to forward measurement. All measurements taken in EVB package and de-embedded to the CSP1 pad interface.

**Typical Performance Plot**

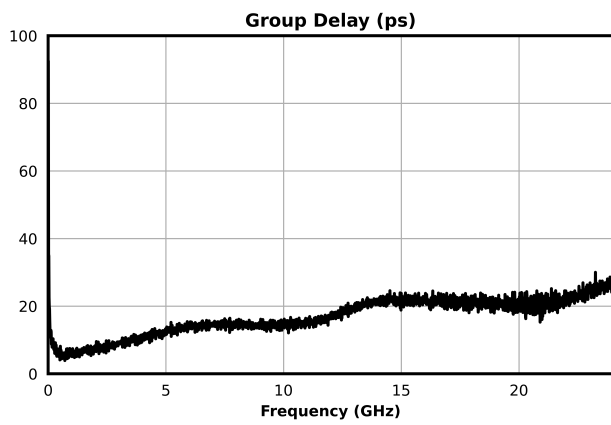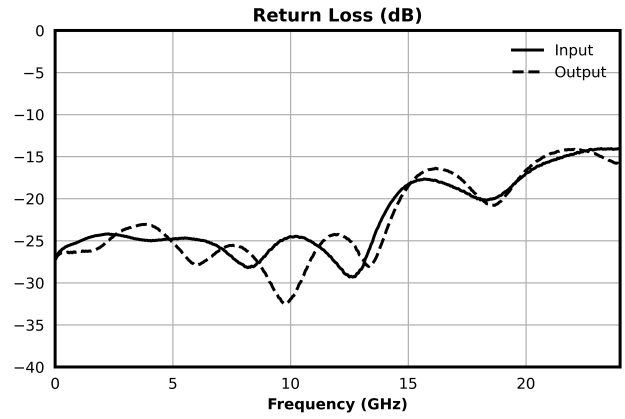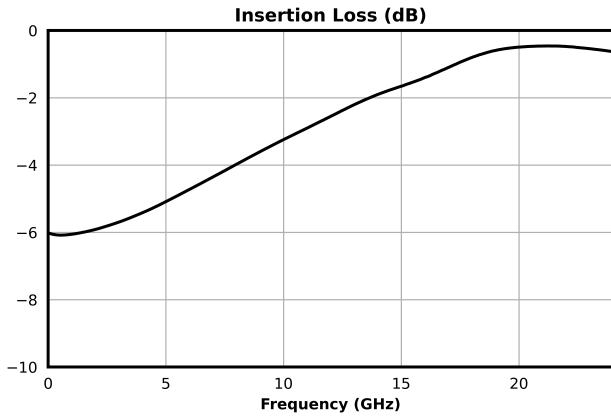

### Mechanical Data


### Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)


\*All measurements are typical units in inch +/- .004" [millimeter +/- 0.1]

Code	Year	QTR
A	2021	Q1
B	2021	Q2
C	2021	Q3
D	2021	Q4
E	2022	Q1
F	2022	Q2
G	2022	Q3
H	2022	Q4
I	2023	Q1
J	2023	Q2
K	2023	Q3
L	2023	Q4
M	2024	Q1
N	2024	Q2
O	2024	Q3
P	2024	Q4
Q	2025	Q1
R	2025	Q2
S	2025	Q3
T	2025	Q4
U	2026	Q1
V	2026	Q2
W	2026	Q3
X	2026	Q4
Y	2027	Q1
Z	2027	Q2
1	2027	Q3
2	2027	Q4
3	2028	Q1
4	2028	Q2
5	2028	Q3
6	2028	Q4
7	2029	Q1
8	2029	Q2
9	2029	Q3
	2029	Q4


Top Down View



Side View



Bottom Up View

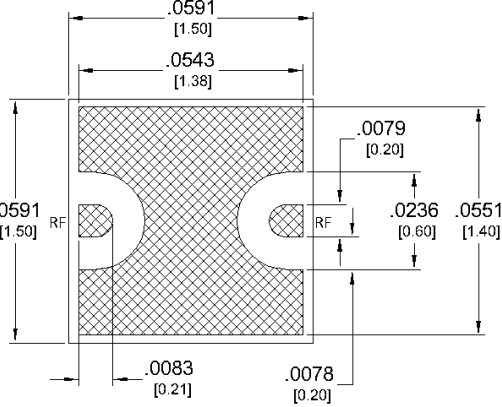

Part marking:  
# - Date code  
XX - See table

XX	MEQ#-20CSP1
43	MEQ3-20CSP1
44	MEQ6-20CSP1
45	MEQ9-20CSP1
46	MEQ20-20CSP1

Notes: (Unless otherwise specified)

- Shaded areas are metalized.
- Finish: Ni: 0.5 - 2.5  $\mu$ m  
Pd: 0.02 - 0.15  $\mu$ m  
Au: 0.003 - 0.015  $\mu$ m

REV	DESCRIPTION	DATE	APPROVALS
A	Initial Release	5/2/25	AT

DRAWN BY		DATE		SIZE	CAGE CODE	DWG. NO.
AVC		4/18/25				
LCG		5/1/25				
AR		5/1/25				

SHEET 1 OF 1

Proprietary: This document was originated by and is the property of Marki Microwave. Unauthorized disclosure is prohibited.

DO NOT SCALE DRAWING

NOTES:



www.markimicrowave.com


Outline  
CSP1 Equalizer

## MEQ6-20CSP1

### Chip Scale Package MMIC 20 GHz 6 dB Equalizer


#### Footprint Image

Download : [Footprint Drawing](#)

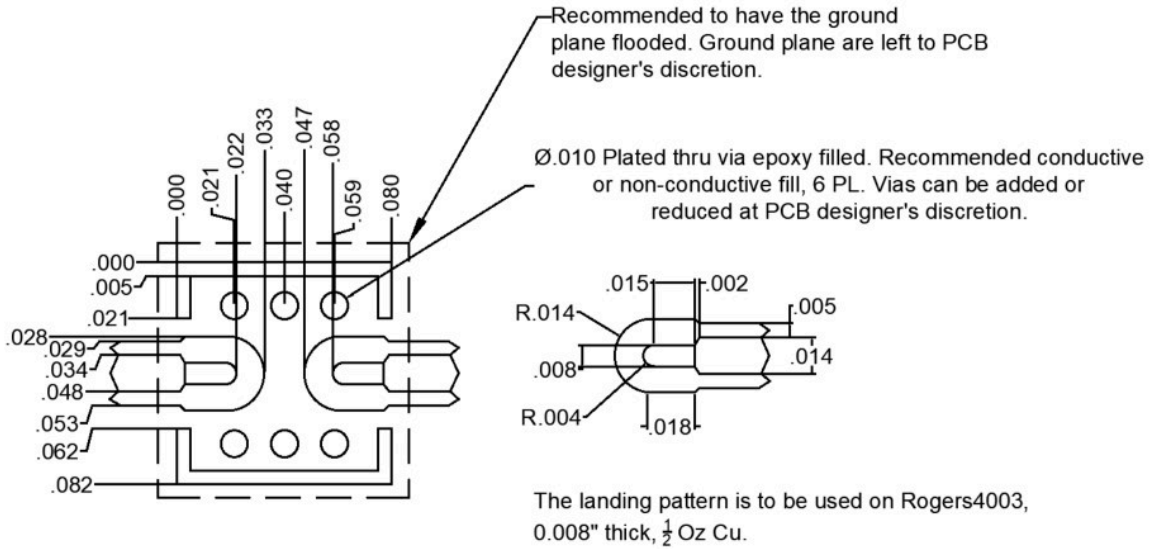

### Evaluation Board - Outline Drawing

All measurements are typical

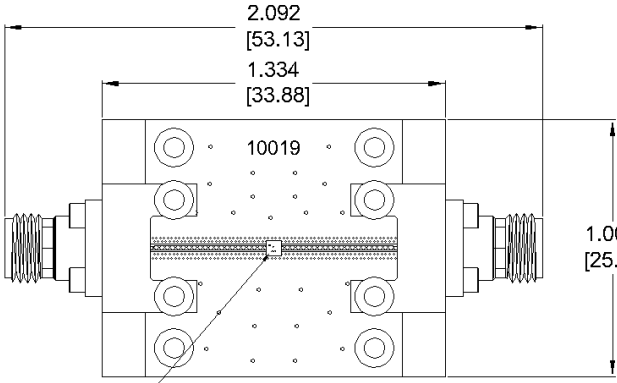

Part marking:  
#: Date code  
XX: See table

XX	Surface Mount P/N	EVB P/N
43	MEQ3-20CSP1	EVB-MEQ3-20
44	MEQ6-20CSP1	EVB-MEQ6-20
45	MEQ9-20CSP1	EVB-MEQ9-20
46	MEQ20-20CSP1	EVB-MEQ20-20

Port	Connector Type
1, 2	2.92mm Female

Note: Connectors are not removable.

NOTES:		Marki www.markimicrowave.com	
J1, 255 OF E.W. 825 0P25 110 TOL: 0.0025 IN / 0.0635 MM	DRAWN BY	DATE	Outline MEQ Eval Board CSP1
FINISH: +.002 XX± .02 ± .001 XX± .010	AVC	5/16/25	
MATERIAL:	LCG	5/16/25	
DO NOT SCALE DRAWING	SIZE	CAGE CODE	DWG. NO.
	A	0UC32	EVB-MEQ#-20

RoHS Compliant (SN96.5/AG3.5) Components/Assembly

Proprietary: This document was originated by and is the property of Marki Microwave. Unauthorized disclosure is prohibited.

SHEET 1 OF 1

**DISCLAIMER**

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2025, Marki Microwave, LLC