

MEQ10-26CSP1

Chip Scale Package MMIC 26 GHz Equalizer

DEVICE OVERVIEW

General Description

The MEQ10-26CSP1 is a passive MMIC equalizer CSP ideal for compensating for low pass filtering effects in RF/microwave and high speed digital systems. The MEQ10-26CSP1 provides positive slope from DC to 26GHz with a DC attenuation of 10dB. The chip scale package allows for extreme miniaturization of the SMT footprint. The unique design offers superior return loss to competitors in an extremely small footprint. GaAs MMIC technology provides consistent unit-to-unit performance in a small, low cost form factor.



[Download s-parameters here](#)

Features

- Small 1.5 x 1.5 mm package size
- 2W RF Power Handling
- DC attenuation of 10dB
- Typical Insertion Loss 0.75 dB at 26GHz
- Typical VSWR of 1.33 Over Operating Band
- Low SWaP
- This product embodies Marki Microwave's U.S. Pat. 11,869,858.

Applications

- RF Transceivers
- High-Speed Data
- Telecom
- Cable Loss Compensation
- Amplifier Compensation

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MEQ10-26CSP1	Chip Scale Package MMIC 26 GHz Equalizer	CSP1	REACH RoHS	Released	EAR99
EVB-MEQ10-26	Evaluation Board, Chip Scale Package MMIC 26 GHz Equalizer	EVB	REACH RoHS	Released	-

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Electrical Specifications
 - Typical Performance
- **Mechanical Data**
 - Outline Drawing
- **Footprint Image**
- **Evaluation Board**
 - Evaluation Board Outline Drawing


Revision History

Revision Code	Revision Date	Comment
-	2022-07-01	Datasheet Initial Release
A	2023-02-01	Package Description Updated




Port Configuration and Functions

Port Diagram

An x-ray view of the MEQ10-26CSP1 package outline drawing is shown below. The MEQ equalizers are symmetrical allowing Port 1 or Port 2 to be used as the input.

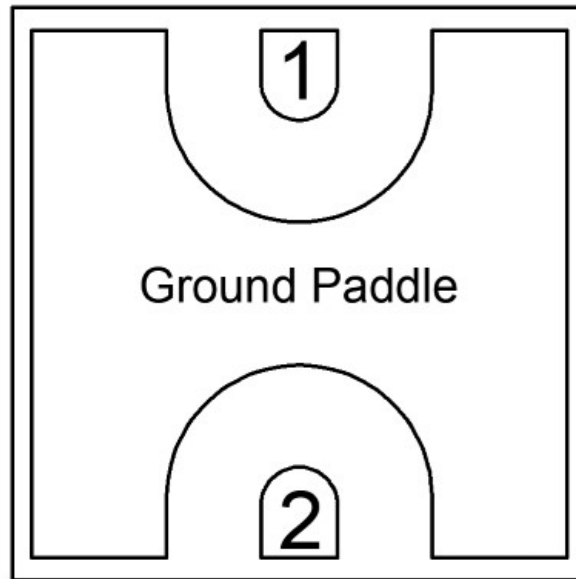

Port Functions

Port	Function	Description	DC Equivalent Circuit
GND	Ground	SM package ground path is provided through the ground paddle.	Pad 
Pin 1	Input/Output	Pin 1 is DC connected to ground through a resistor. DC block is required if voltage present.	P1 
Pin 2	Input/Output	Pin 2 is DC connected to ground through a resistor. DC block is required if voltage present.	P2 

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Power Handling, at any Port	2	W

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Dimensions	-	1.5 x 1.5 mm
Moisture Sensitivity Level	-	MSL 3



Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the equalizer in a CSP package with a sine wave input applied to port 1. Min and Max limits are guaranteed at TA=+25°C. All bare die are 100% DC tested and visually inspected.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Impedance	-	0	26	-	50	-	Ω
Insertion Loss	-	26	26	-	0.75	-	dB
Insertion Loss at DC	-	0	0	-	10	-	dB
Return Loss	-	0	26	-	17	-	dB

Equalizer is symmetrical. Reverse measurement is equivalent to forward measurement. All measurements taken in EVB package and de-embedded to the CSP1 pad interface.


Typical Performance

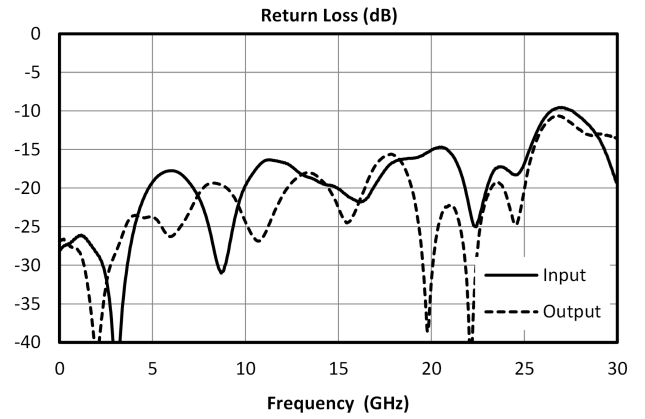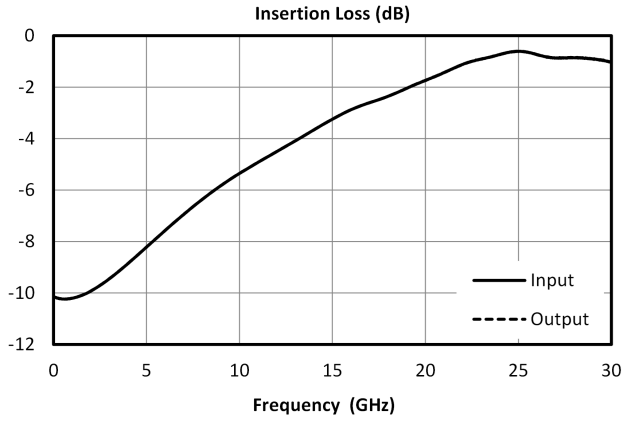

Mechanical Data


Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

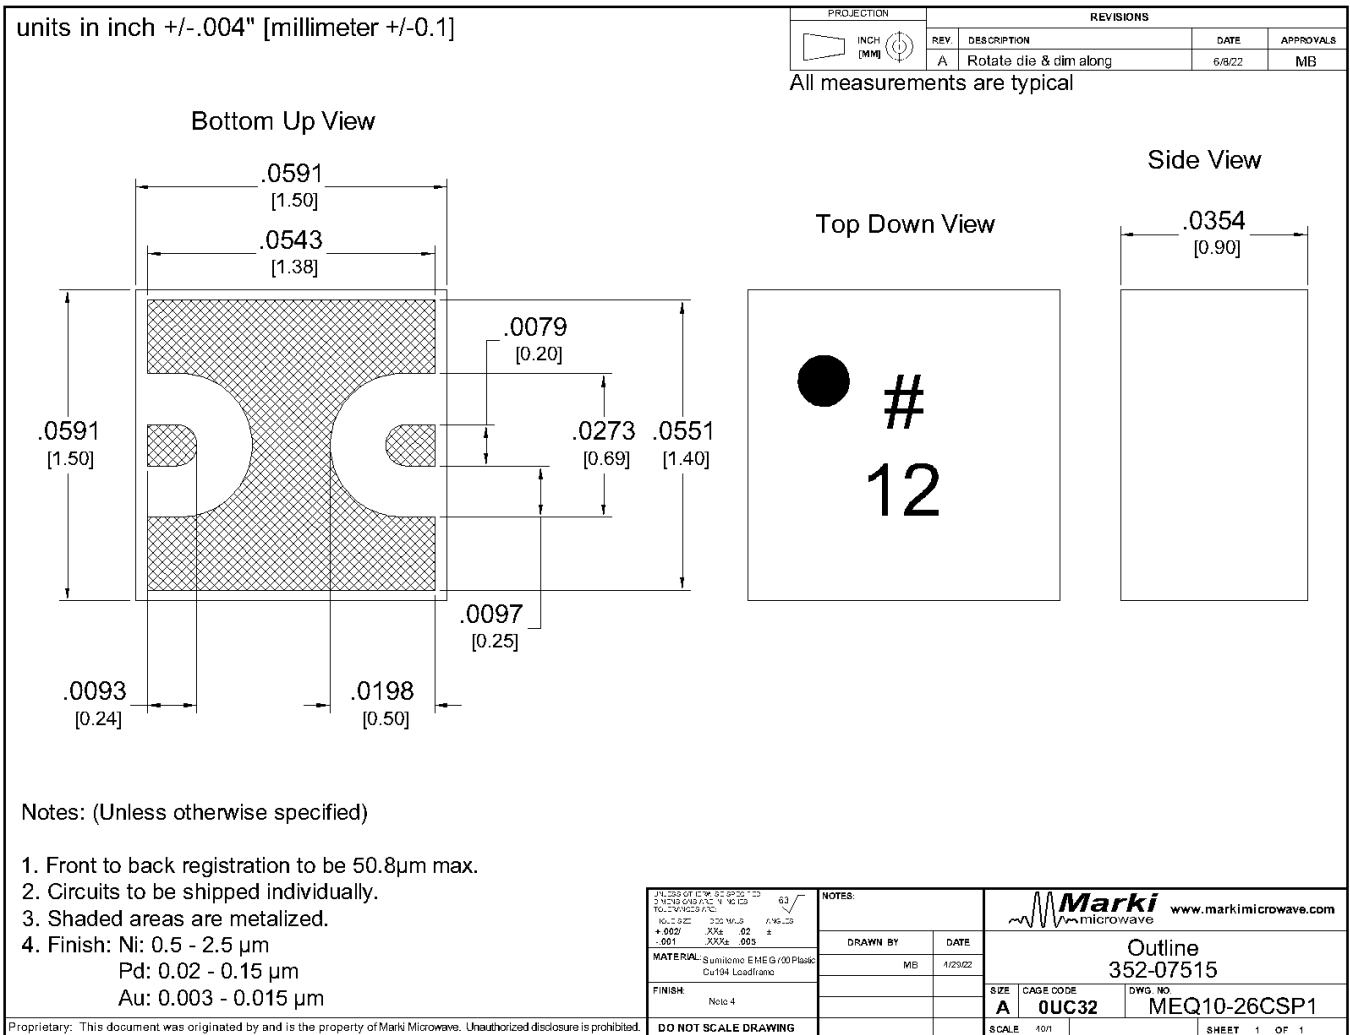


Footprint Image

Download : [Footprint Drawing](#)

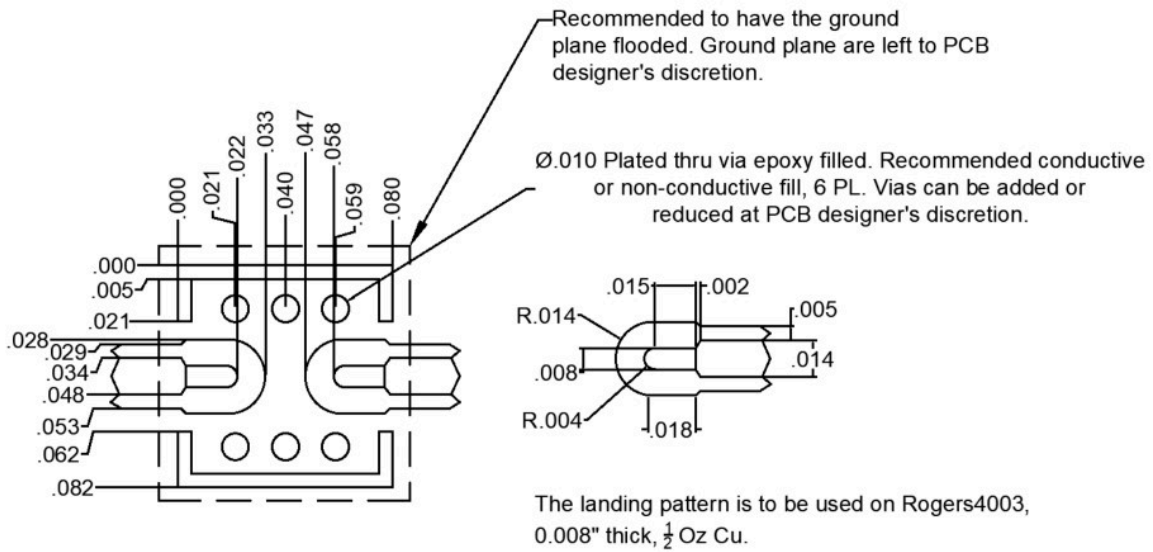

Evaluation Board - Outline Drawing

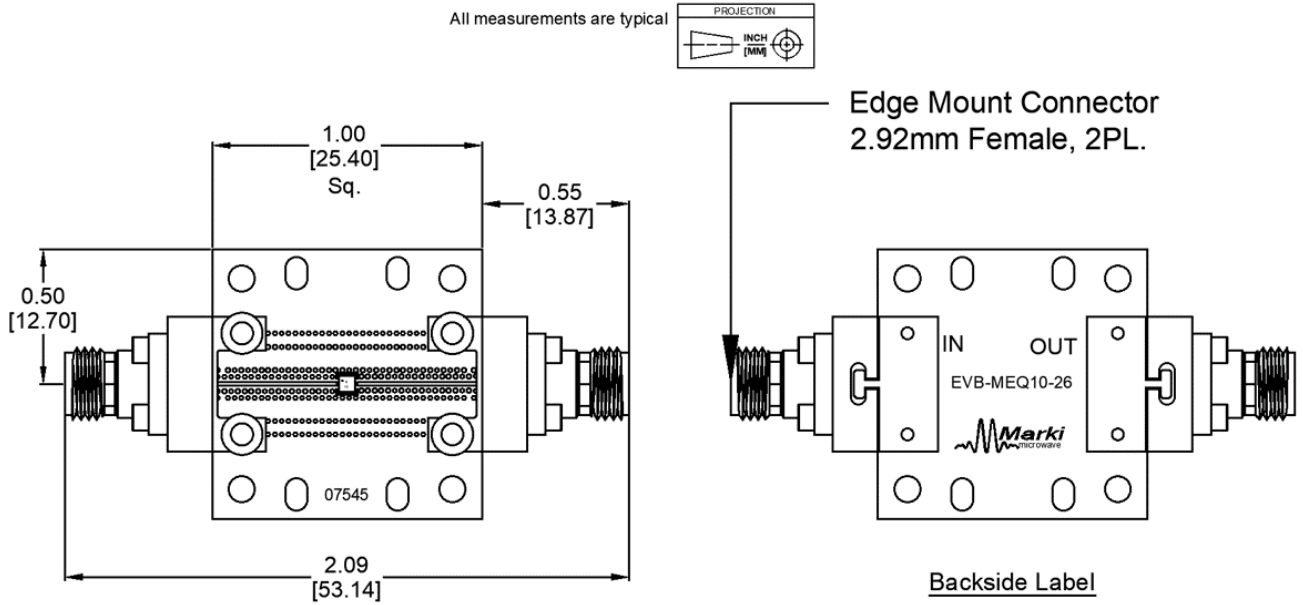

Unless otherwise specified, dimensions are in inches. Tolerances are:

.XX	±.02
.XXX	±.005

DISCLAIMER

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2022 - 2023, Marki Microwave, LLC