




215 Vineyard Court, Morgan Hill, CA 95037  
 PHONE (408) 778-4200 FAX (408) 778-4300  
 Website: MarkiMicrowave.com


Weight: 2 gms typ

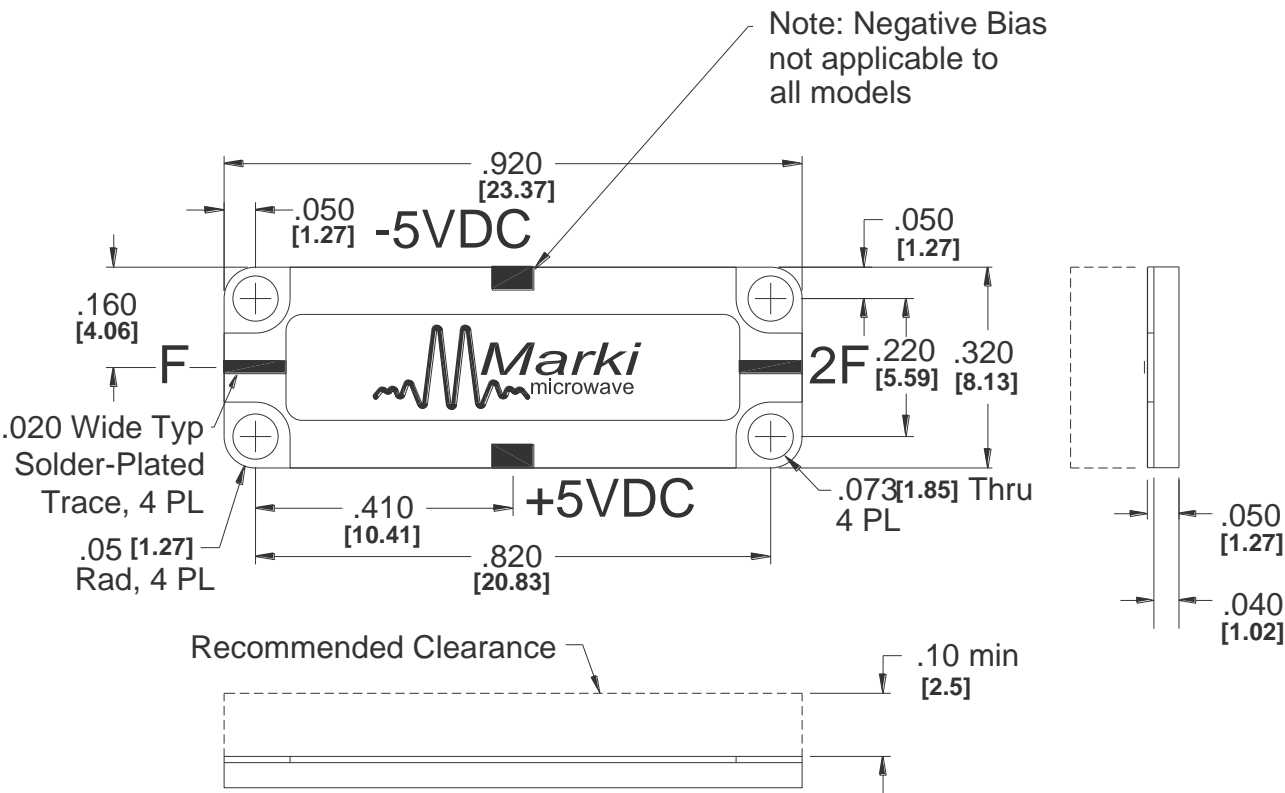

It is recommended that the negative bias be applied before or concurrent with the positive bias.

Gold-plated kovar bonding pads are available.

## EX-Style Amplified-Doubler Outline

Projection		XXX=±.005 XX=±.02
	Inch [mm]	

EX-Carrier I/O trace finish is reflowed Sn63/Pb37 solder plate over Cu.  
 EX-Carrier is Half Hard Brass, plated Electroless Nickel 150-250 μ-inches, followed by Nickel Flash.  
 Click on links for [suggested System layout](#) and [Carrier Mounting](#) notes.