


# MMD-3567LBH

## GaAs MMIC Doubler, 35 - 67 GHz Output Frequency

### DEVICE OVERVIEW

#### General Description

The MMD-3567LBH is a MMIC doubler fabricated with GaAs Schottky diodes. This part operates over a 17.5 GHz to 33.5 GHz input frequency range or a doubled output frequency range of 35 to 67 GHz. It features excellent 12 dB conversion loss, superior 49 dB 1F and 51 dB 3F isolations, and harmonic suppressions across a broad bandwidth. Available in a compact inline connectorized bullet housing. For wire-bondable die, see MMD-3580LCH.




#### Features

- High Fundamental Rejection
- 2F Conversion Loss, 12 dB Typical
- Low Input Drive, +7 dBm Typical
- mmWave Output Frequencies
- Compact Inline Bullet Housing

#### Applications

- High frequency synthesis
- LO signal chain

#### Functional Block Diagram



#### Part Ordering Options

Part Number	Description	Package	Connectors	Green Status	Product Lifecycle	Export Classification
MMD-3567LBH	GaAs MMIC Doubler, 35 - 67 GHz Output Frequency	BH	-	REACH RoHS	Released	EAR99

## MMD-3567LBH

GaAs MMIC Doubler, 35 - 67 GHz Output Frequency

### Table Of Contents

#### ■ Device Overview

- General Description
- Features
- Applications
- Functional Block Diagram

#### ■ Port Configuration and Functions

- Port Diagram
- Port Functions

#### ■ Revision History

#### ■ Specifications

- Absolute Maximum Ratings
- Package Information
- Recommended Operating Conditions
- Electrical Specifications
- Typical Performance Plots

#### ■ Mechanical Data

- Outline Drawing

### Revision History

Revision Code	Revision Date	Comment
-	2025-12-01	Initial Release


## MMD-3567LBH

GaAs MMIC Doubler, 35 - 67 GHz Output Frequency




### Port Configuration and Functions

#### Port Diagram

The MMD-3567LBH should only be used in the forward direction, with the input and output ports given in Port Functions.

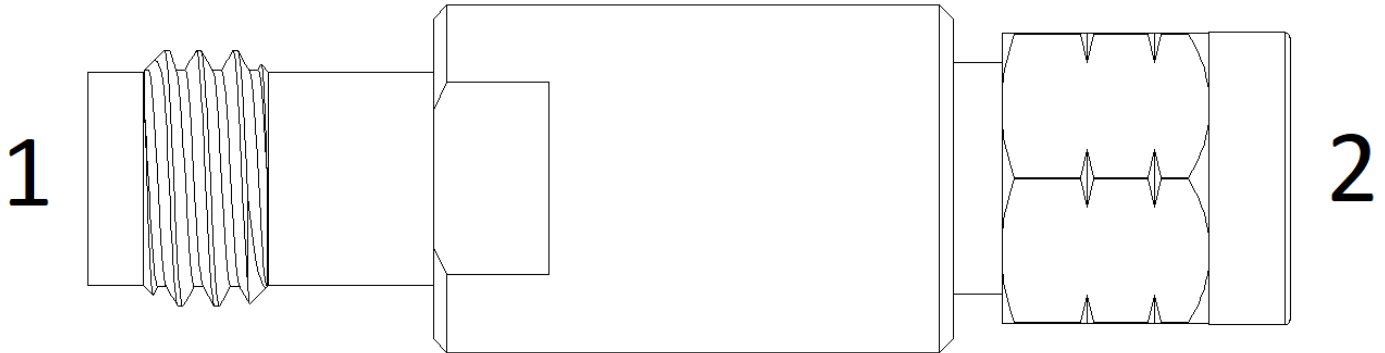

#### Port Functions

Port	Function	Connector Type	Description	DC Equivalent Circuit
GND	Ground	-	BH package ground provided through metal housing and outer coax conductor	
Port 1	1F Input	1.85F	Input 1x Frequency Port. Port 1 is DC open for the BH package.	
Port 2	2F Output	1.85M	2x Input Frequency output port. Port 2 is DC open for the BH package.	

## MMD-3567LBH

GaAs MMIC Doubler, 35 - 67 GHz Output Frequency

### Specifications

#### Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. All Absolute Maximum Ratings are individual and should not be met in parallel. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Storage Temperature	125	°C
Minimum Storage Temperature	-65	°C
Maximum Operating Temperature	85	°C
Minimum Operating Temperature	-55	°C
Power Handling, at any Port	23	dBm

#### Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Weight	Package name: BH	10g
Dimensions	-	32.8 x 9.5 mm

#### Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Operating Temperature	-55	25	85	°C
Input Power	7	9	11	dBm

#### Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the connectorized BH package doubler used in the forward direction with a +9 dBm sine wave input.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Conversion Loss	Second Harmonic Output	35	67	-	12	-	dB
Input Frequency Range	-	-	-	17.5	-	33.5	GHz
Isolation, 1F <sup>1</sup>	Input = 17.5 - 33.5 GHz Output = 17.5 - 33.5 GHz	-	-	-	49	-	dB
Isolation, 3F <sup>2</sup>	Input = 17.5 - 22.3 GHz Output = 52.5 - 67 GHz	-	-	-	51	-	dB
Isolation, 4F <sup>3</sup>	Input = 15 - 16.8 GHz Output = 60 - 67 GHz	-	-	-	23	-	dB
Output Frequency Range	-	-	-	35	-	67	GHz
Suppression, 1F <sup>4</sup>	Input = 17.5 - 33.5 GHz Output = 17.5 - 33.5 GHz	-	-	-	37	-	dBc
Suppression, 3F <sup>5</sup>	Input = 17.5 - 22.3 GHz Output = 52.5 - 67 GHz	-	-	-	38	-	dBc
Suppression, 4F <sup>6</sup>	Input = 15 - 16.8 GHz Output = 60 - 67 GHz	-	-	-	10	-	dBc









[1][2][3] Isolation is defined as the harmonic power relative to the 1F fundamental input power.

[4][5][6]Suppressions and isolations measured with an input source with >60dBc (relative to fundamental input) harmonic suppression. Suppression is defined as the harmonic power relative to the 2F doubled output power.

# MMD-3567LBH

GaAs MMIC Doubler, 35 - 67 GHz Output Frequency

## Typical Performance Plots

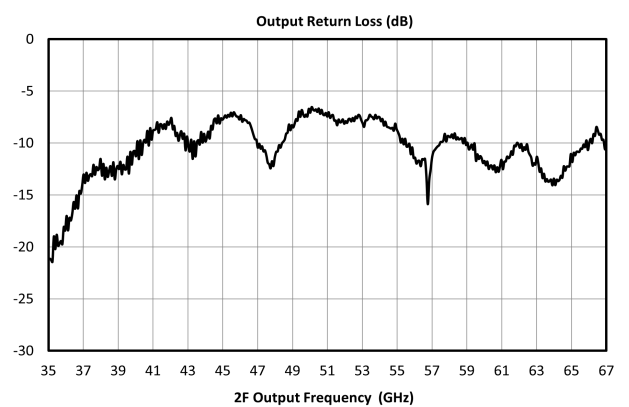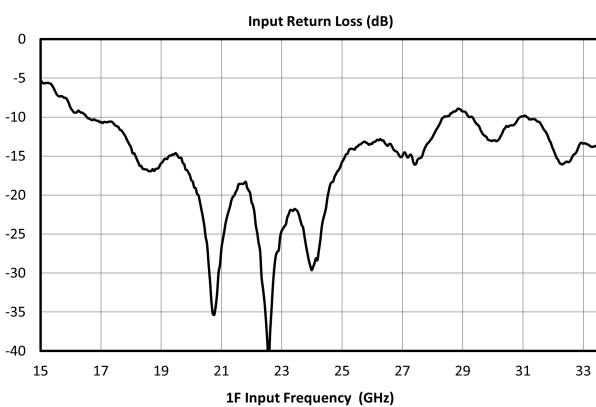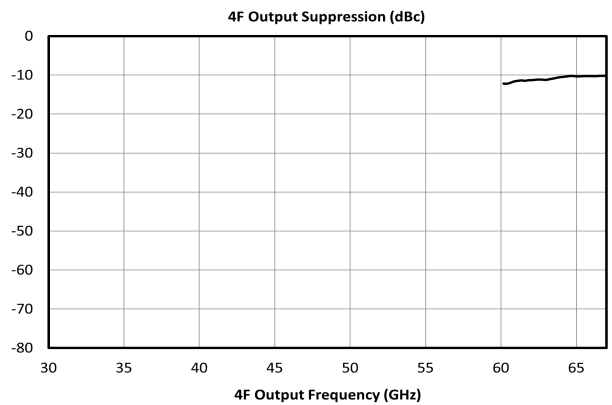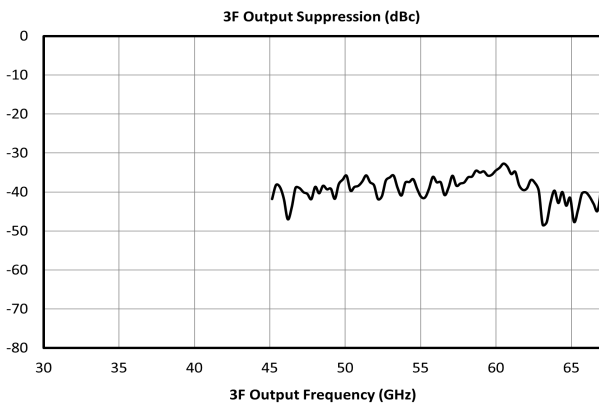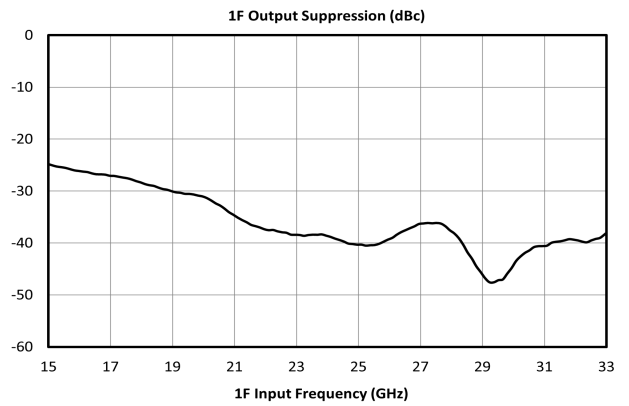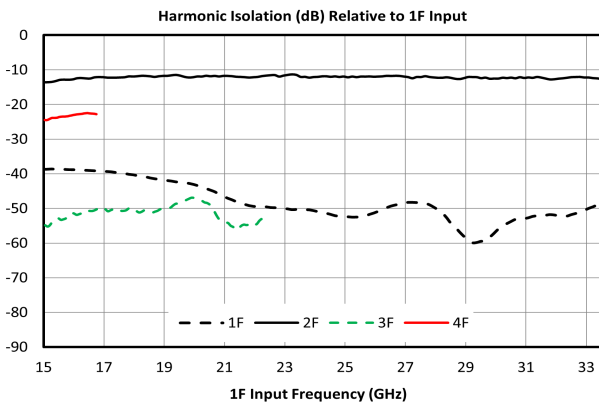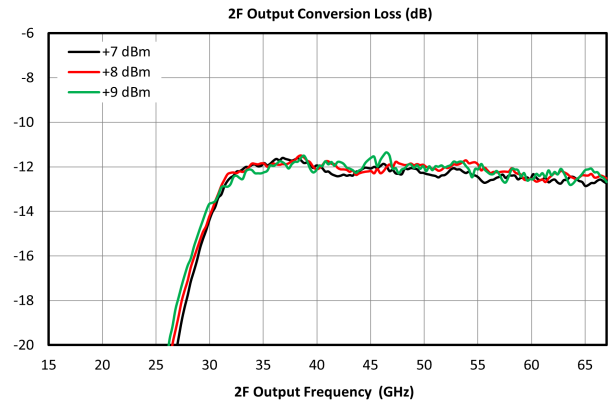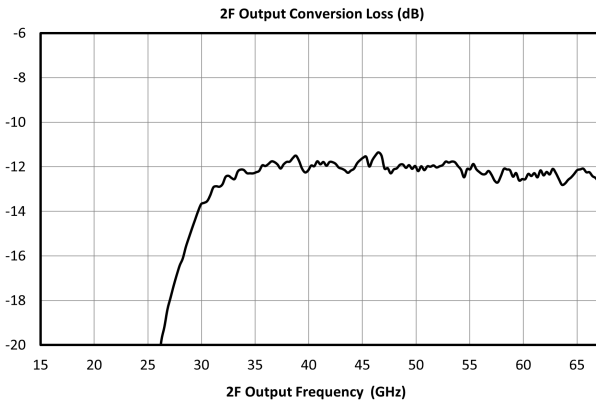


# MMD-3567LBH

GaAs MMIC Doubler, 35 - 67 GHz Output Frequency

## Mechanical Data

### Outline Drawing

Download : [Outline 2D Drawing](#)

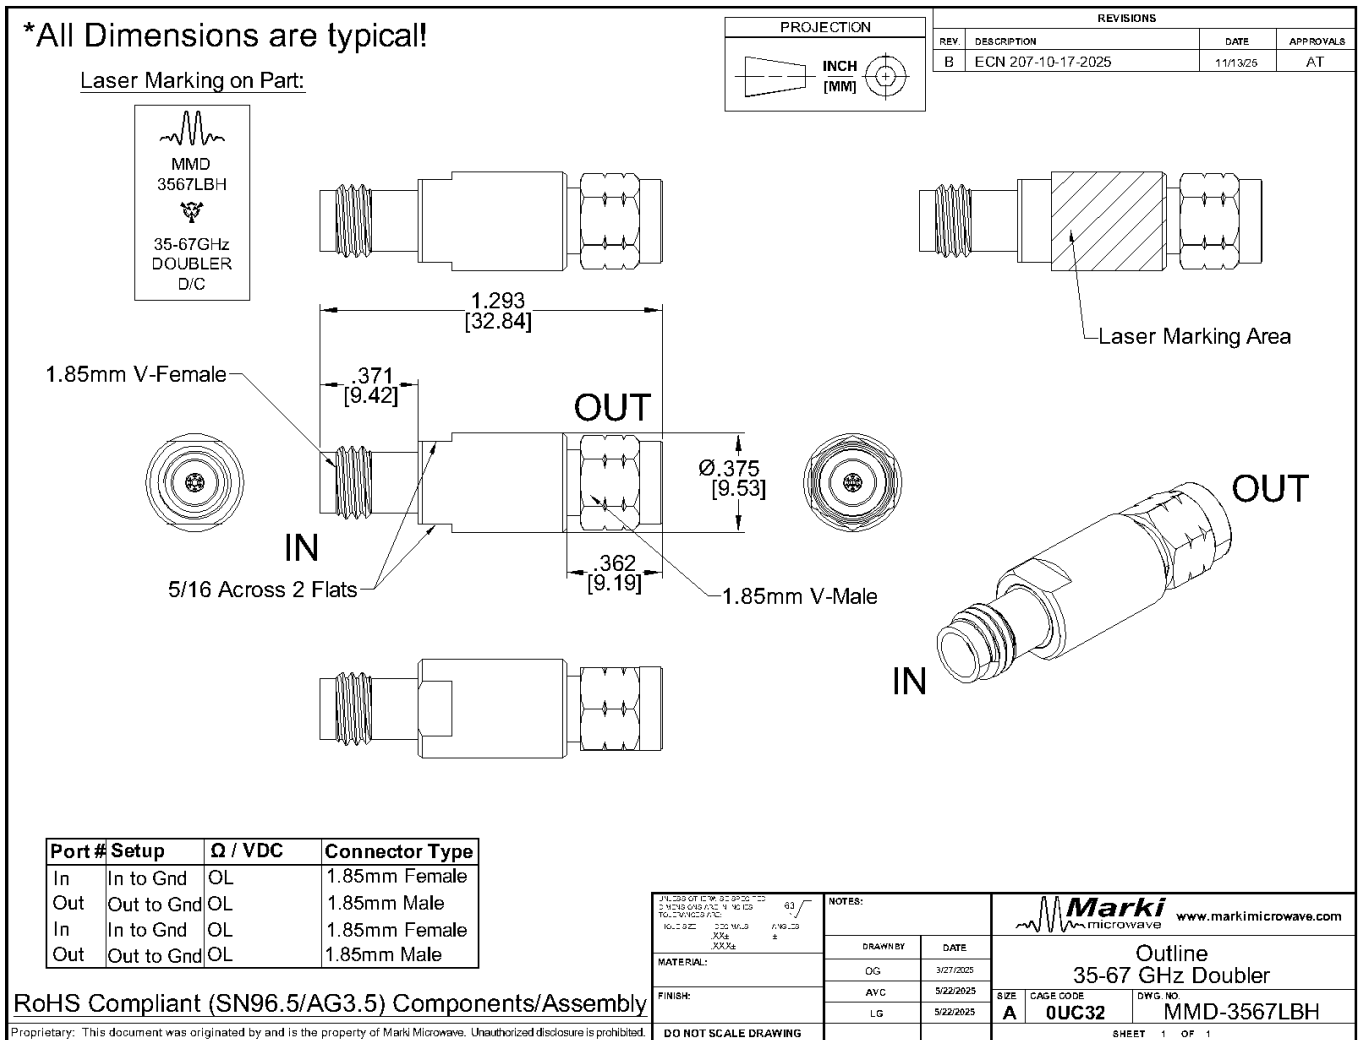

## MMD-3567LBH

### GaAs MMIC Doubler, 35 - 67 GHz Output Frequency

#### DISCLAIMER

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2025, Marki Microwave, LLC