


MDPX-00001CH

Passive MMIC Duplexer

DEVICE OVERVIEW

General Description

The MDPX-00001CH is a broadband passive MMIC duplexer, a combination of two bandpass filters, capable of multiplexing low band 13.2 to 15.4 GHz and high band 17.4 to 20.3 GHz signals. Passive GaAs MMIC technology allows production of smaller filter constructions that replace larger form factor circuit board constructions. Tight fabrication tolerances allow for less unit-to-unit variation than traditional filter technologies. Low unit to unit variation allows for accurate simulations using the provided S3P file taken from measured production units.




Features

- 16.8 GHz Crossover Point
- Low <2dB Typical Insertion Loss in Passband
- High Stop Band Suppression
- Excellent Return Loss

Applications

N/A

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MDPX-00001CH	Passive MMIC Duplexer	CH	RoHS REACH	Released	EAR99

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Electrical Specifications
 - Typical Performance Plots
- **Die Mounting Recommendations**
 - Mounting and Bounding Recommendations
- **Mechanical Data**
 - Outline Drawing


Revision History

Revision Code	Revision Date	Comment
-	2023-08-30	Datasheet Initial Release
A	2024-01-05	Updated Production Test Criteria
B	2024-02-20	Updated Package Dimension





Port Configuration and Functions

Port Diagram

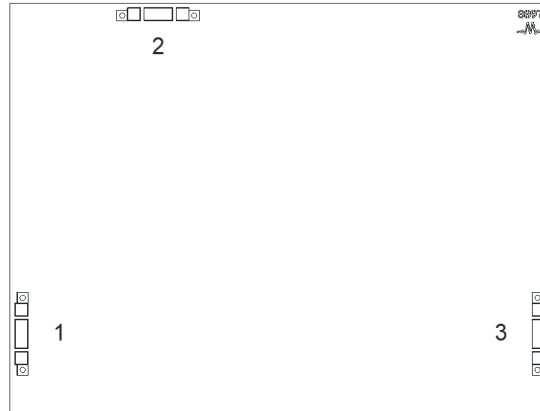A top-down view of the MDPX-00001CH package outline drawing is shown below.



Port Functions

Port	Function	Description	Equivalent Circuit for Package
GND	Ground	CH package ground path is provided through the substrate and ground bond pads.	
Pad 1	Input/common	Pad 1 is the common port. This pad is DC short to ground and DC open to all other pads.	
Pad 2	High Pass Filter	Pad 2 is the high band pass filter. This pad is DC short to ground and is DC open to all other pads.	
Pad 3	Low Pass Filter	Pad 3 is the low band pass filter. This pad is DC short to ground and is DC open all other pads.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
DC Current, at any Port	1.2	A
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C

Package Information








Parameter	Details	Rating
Dimensions	-	3.10 x 4.10 mm



Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Min and Max limits are guaranteed at TA=+25°C. All bare die are 100% visually inspected and RF performance is guaranteed by sample testing.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
3dBc Passband High Frequency	-	-	-	17.2	-	20.8	GHz
3dBc Passband Low Frequency	-	-	-	13	-	15.7	GHz
Common Port Return Loss	-	17.4	20.3	-	23	-	dB
Common Port Return Loss	-	13.2	15.4	-	21	-	dB
Group Delay, High Band	-	17.4	20.3	-	360	-	ps
Group Delay, Low Band	-	13.2	15.4	-	473	-	ps
High Band Center Frequency	-	-	-	-	18.8	-	GHz
High Frequency Passband	-	-	-	17.4	-	20.3	GHz
Impedance	-	-	-	-	50	-	Ω
Insertion Loss @ F _c , High Band	-	18.8	18.8	-	1.76	-	dB
Insertion Loss @ F _c , Low Band	-	14.3	14.3	-	1.91	-	dB
Isolation	-	16.5	40	-	59	-	dB
Isolation	-	0	13.4	-	77	-	dB
Low Band Center Frequency	-	-	-	-	14.3	-	GHz
Low Frequency Passband	-	-	-	13.2	-	15.4	GHz
Passband Return Loss, High Band	-	17.4	20.3	-	18	-	dB
Passband Return Loss, Low Band	-	13.2	15.4	-	24	-	dB
Stopband Suppression, High Band	-	21.9	40	-	51	-	dB
Stopband Suppression, High Band	-	0	13.4	-	57	-	dB
Stopband Suppression, Low Band	-	16.5	40	-	55	-	dB
Stopband Suppression, Low Band	-	0	10.4	-	60	-	dB

Typical Performance Plots

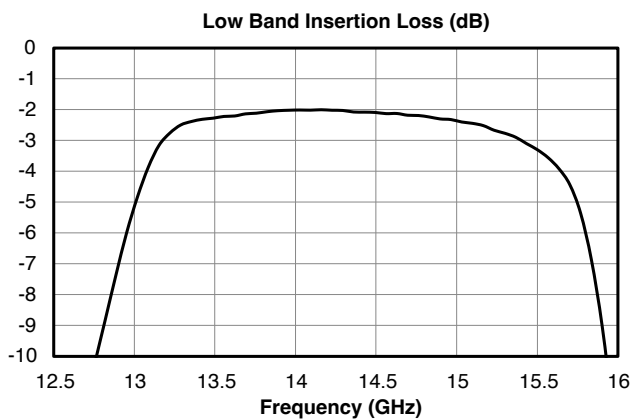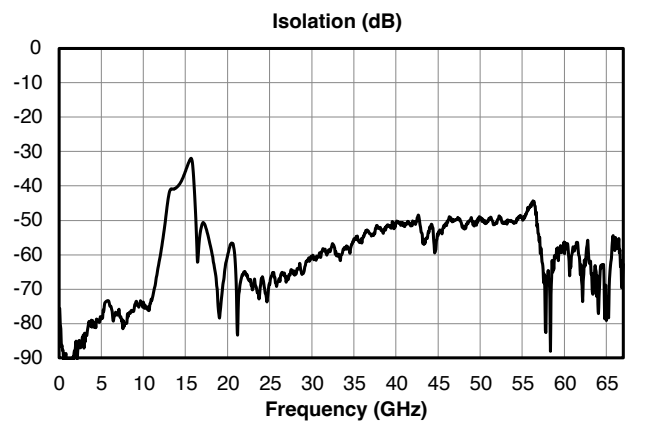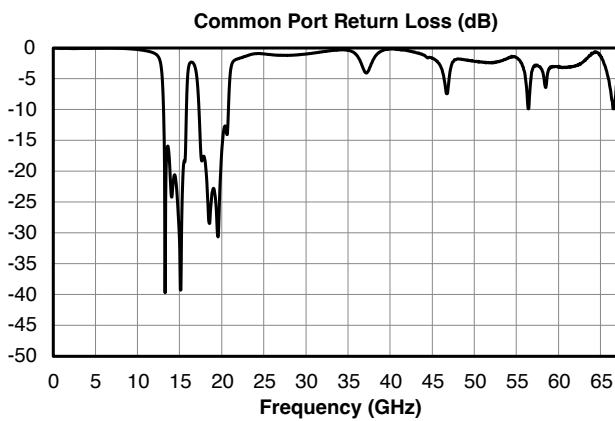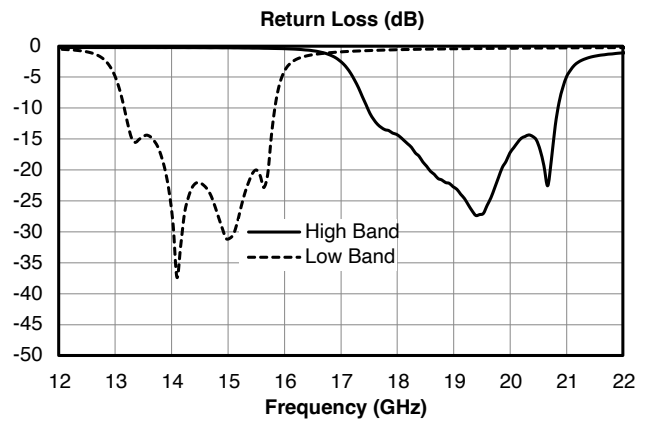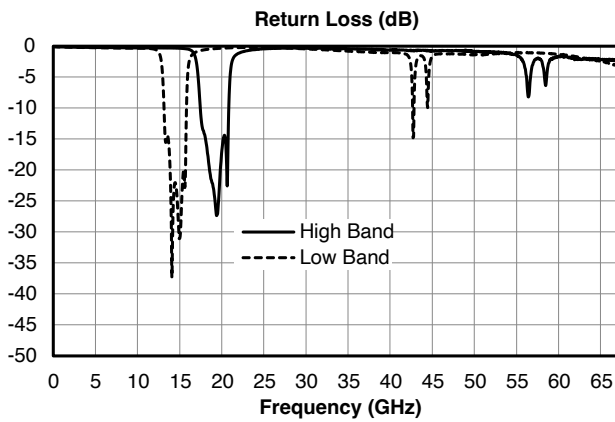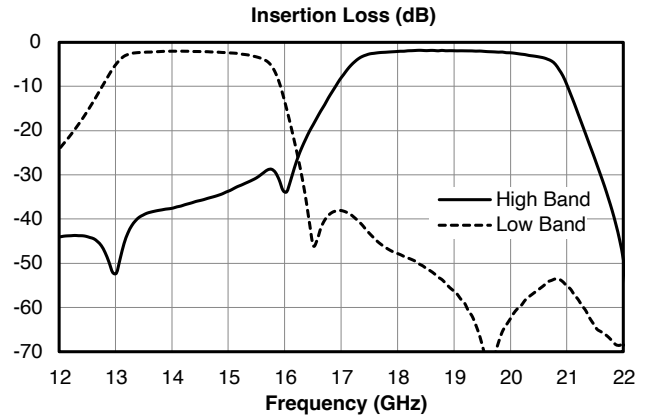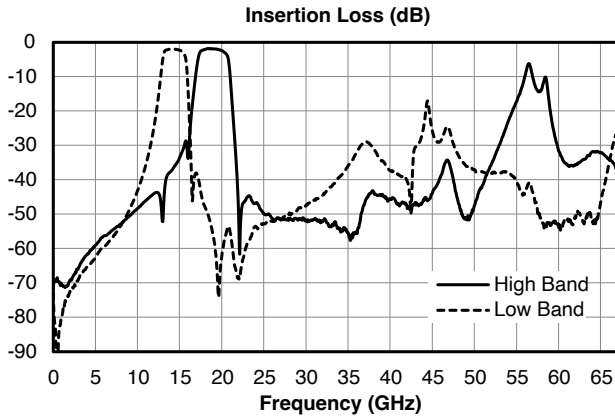

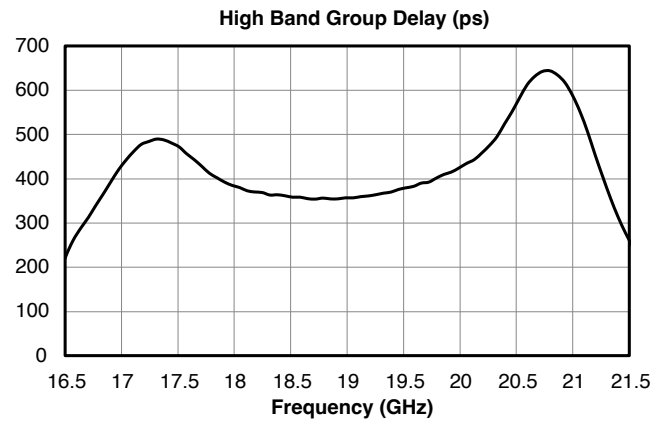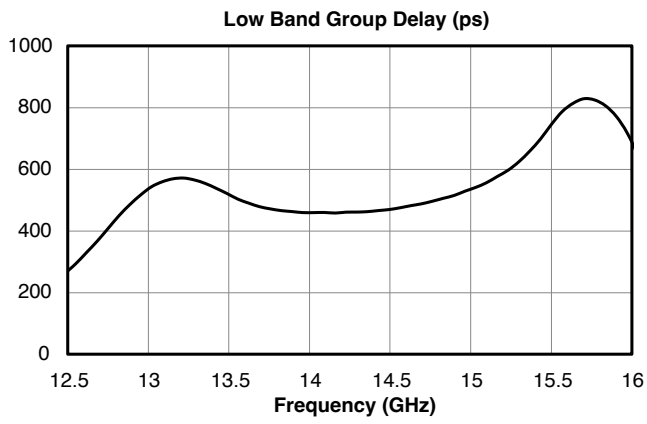

Die Mounting Recommendations

Mounting and Bonding Recommendations


Marki MMICs should be attached directly to a ground plane with conductive epoxy. The ground plane electrical impedance should be as low as practically possible. This will prevent resonances and permit the best possible electrical performance. Datasheet performance is only guaranteed in an environment with a low electrical impedance ground.

Mounting - To epoxy the chip, apply a minimum amount of conductive epoxy to the mounting surface so that a thin epoxy fillet is observed around the perimeter of the chip. Cure epoxy according to manufacturer instructions.

Wire Bonding - Ball or wedge bond with 0.025 mm (1 mil) diameter pure gold wire. Thermosonic wirebonding with a nominal stage temperature of 150 °C and a ball bonding force of 40 to 50 grams or wedge bonding force of 18 to 22 grams is recommended. Use the minimum level of ultrasonic energy to achieve reliable wirebonds. Wirebonds should be started on the chip and terminated on the package or substrate. All bonds should be as short as possible <0.31 mm (12 mils).

Circuit Considerations – 50 Ω transmission lines should be used for all high frequency connections in and out of the chip. Wirebonds should be kept as short as possible, with multiple wirebonds recommended for higher frequency connections to reduce parasitic inductance. In circumstances where the chip more than .001” thinner than the substrate, a heat spreading spacer tab is optional to further reduce bondwire length and parasitic inductance.

Bonding Diagram

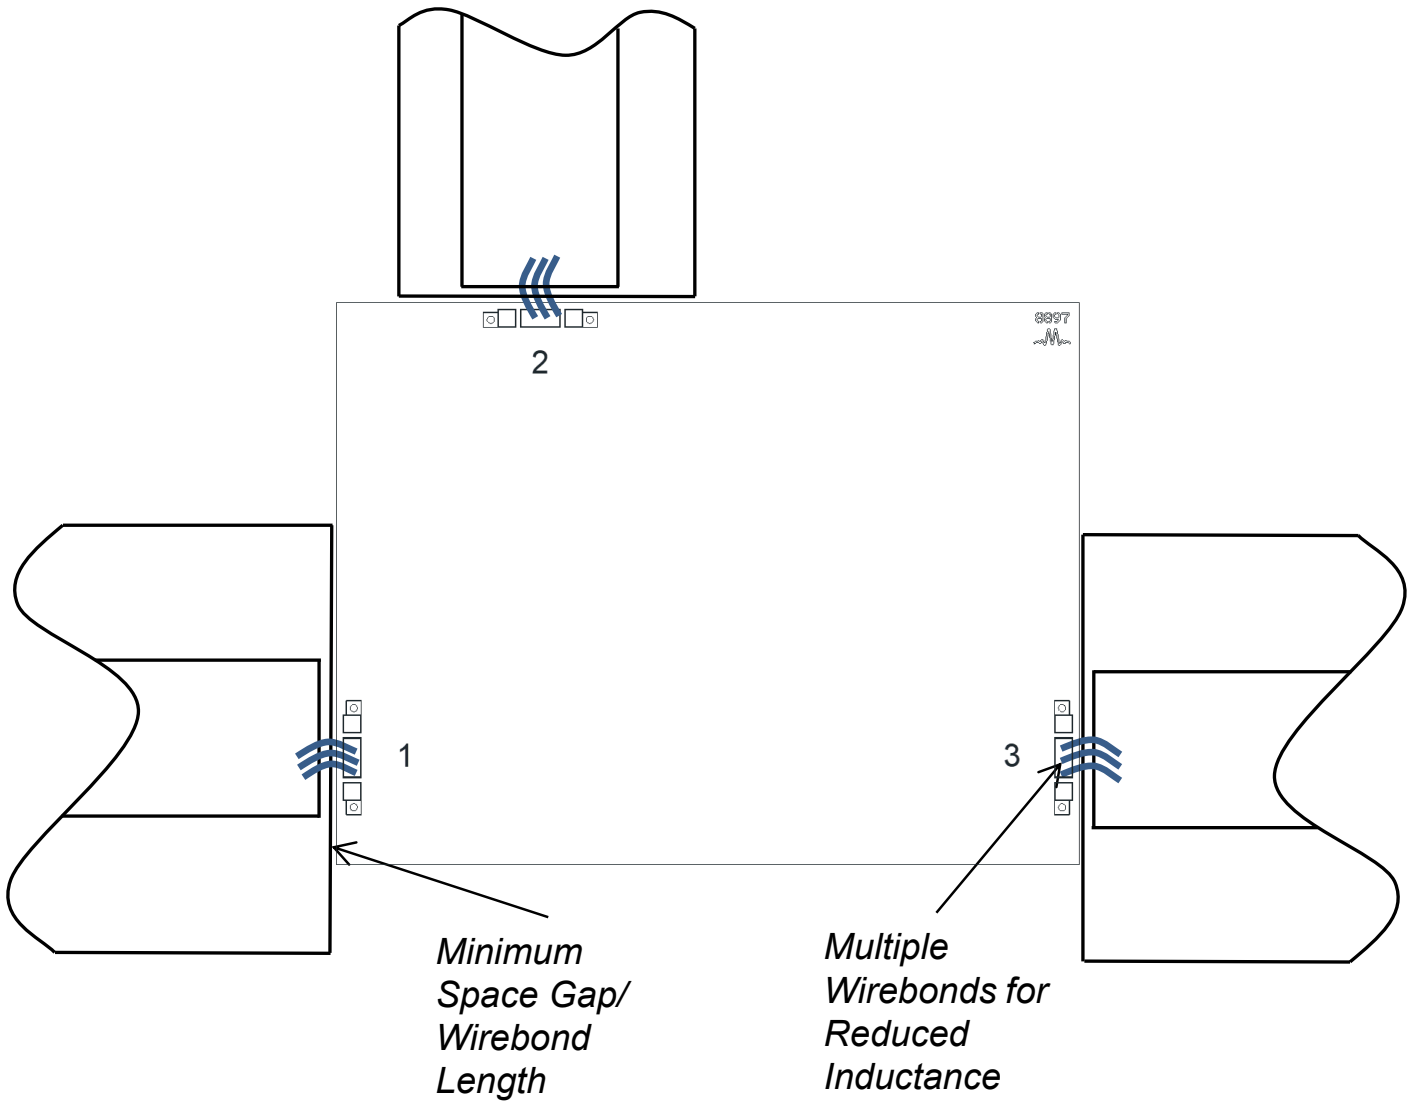

Handling Precautions

General Handling

Chips should be handled with care using tweezers or a vacuum collet. Users should take precautions to protect chips from direct human contact that can deposit contaminants, like perspiration and skin oils on any of the chip's surfaces.

Static Sensitivity

GaAs MMIC devices are sensitive to ESD and should be handled, assembled, tested, and transported only in static protected environments.

Cleaning and Storage: Do not attempt to clean the chip with a liquid cleaning system or expose the bare chips to liquid. Once the ESD sensitive bags the chips are stored in are opened, chips should be stored in a dry nitrogen atmosphere.

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2023 - 2024, Marki Microwave, Inc