

ADPFVMK

ADP Series 2.4mm Female to 2.92mm Male Adapter

DEVICE OVERVIEW

General Description

The ADPFVMK is a 2.4mm Female to 2.92mm Male straight angle coaxial adapter. This adapter features low insertion loss and low VSWR across a DC-40 GHz bandwidth. 3/8" torque wrench and 5.5 mm fixed wrench recommended.



[Download s-parameters here](#)

Features

- Low VSWR
- Low loss

Applications

- Interconnect

Functional Block Diagram

N/A

Part Ordering Options

Part Number	Description	Connectors	Green Status	Product Lifecycle	Export Classification
ADPFVMK	ADP Series 2.4mm Female to 2.92mm Male Adapter	-	REACH RoHS compliant per Annex III, Exemption 6(c)	Released	EAR99

ADPFVMK

ADP Series 2.4mm Female to 2.92mm Male Adapter

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
- **Port Configuration and Functions**
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Electrical Specifications
 - Typical Performance Plot
- **Mechanical Data**
 - Outline Drawing

Revision History

Revision Code	Revision Date	Comment
-	2024-08-29	Initial Release

ADPFVMK

ADP Series 2.4mm Female to 2.92mm Male Adapter

Port Configuration and Functions

Port Functions

Port	Function	Connector Type	Description	Equivalent Circuit for Package
Port 1	IN/OUT	2.4F	-	-
Port 2	IN/OUT	2.92M	-	-

ADPFVMK

ADP Series 2.4mm Female to 2.92mm Male Adapter

Specifications

Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
DC Current	7.5	A
Maximum Operating Temperature	105	°C
Minimum Operating Temperature	-55	°C

ADPFVMK

ADP Series 2.4mm Female to 2.92mm Male Adapter





Electrical Specifications

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Insertion Loss	-	0	40	-	0.1	-	dB
Return Loss	-	0	40	-	35	-	dB
VSWR	-	0	40	-	1.03	-	

ADPFVMK

ADP Series 2.4mm Female to 2.92mm Male Adapter

Typical Performance Plot

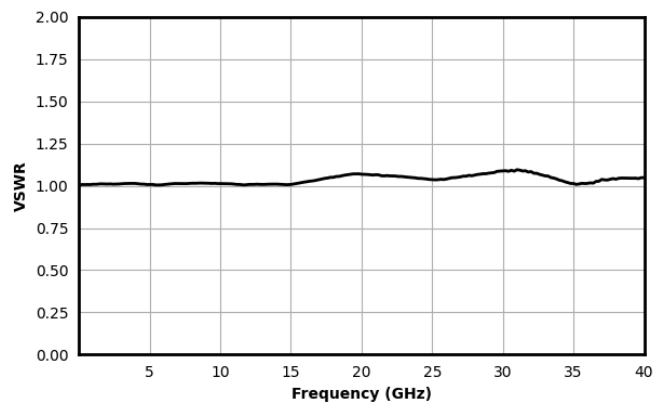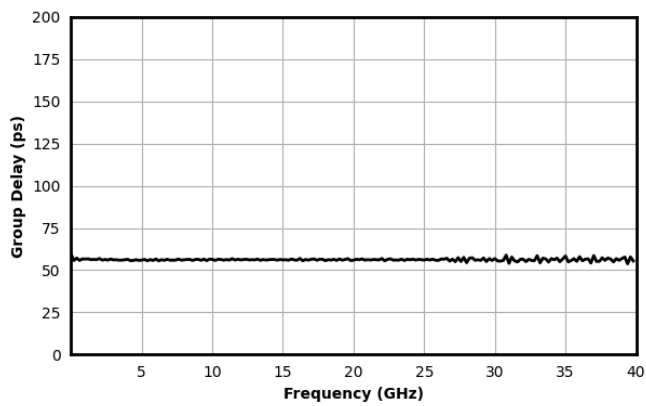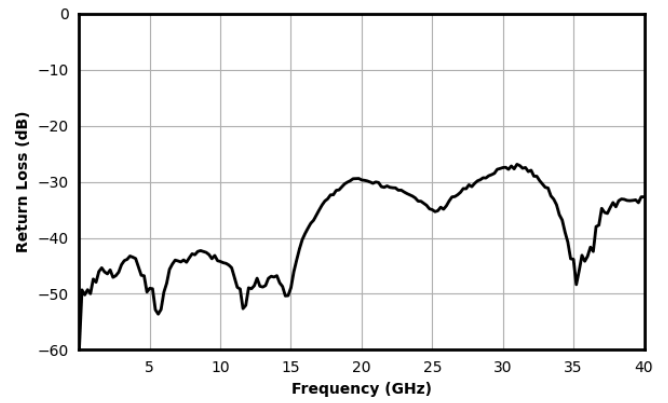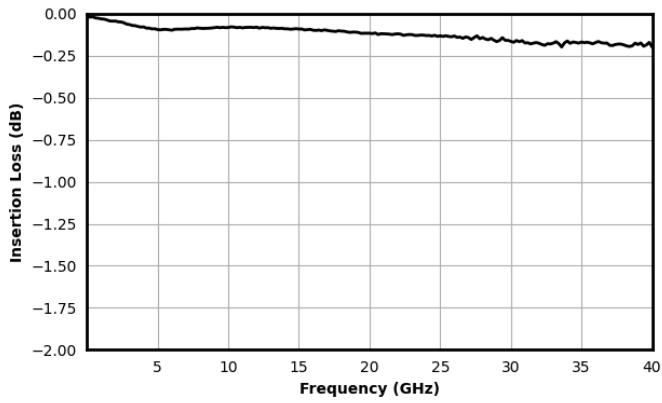

ADPFVMK


ADP Series 2.4mm Female to 2.92mm Male Adapter

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#)

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVALS
	A	Initial Release	6/19/25	AT

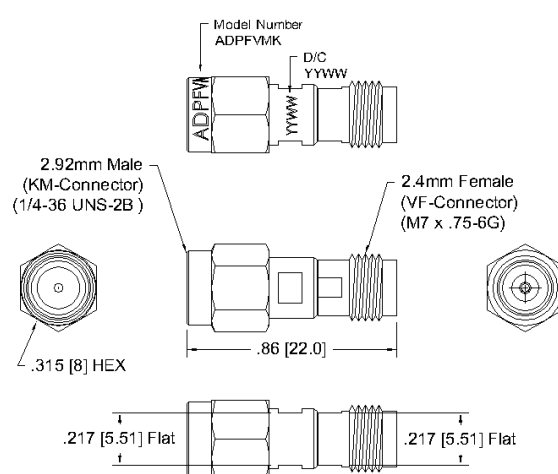

Parts	Material	Plating (Micro-inch)
Contact Pins	Berylium Copper (BeCu)	Gold pl. 4 min. ,over Nickel-phosphorus Alloy pl. 80 min. ,over Copper pl. 20 min.
Insulator	PPO	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

NOTE:

- All Dimensions are in Inches [Metric].

<p>JUL 2025 01:15 PM 05/28/2025 2.4MM JACK TO 2.92MM PLUG ADPFVMK 10.1.002 2.00 MM-05 6/19/25 XXXX 01 XXXX 005</p>	<p>DRAWN BY: TNN DATE: 05-28-2025</p>	<p>Marki www.markimicrowave.com 2.4mm Jack to 2.92mm Plug ADPFVMK</p>
<p>MATERIAL: - FINISH: -</p>	<p>SIZE: A CAGE CODE: 0UC32 DWG. NO.: ADPFVMK</p>	<p>SCALE: NONE SHEET: 1 OF 1</p>

Proprietary: This document was originated by and is the property of Marki Microwave. Unauthorized disclosure is prohibited. DO NOT SCALE DRAWING

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2024, Marki Microwave, Inc