


MFLP-00029CSP1

Passive GaAs MMIC 12.9 GHz Lowpass Filter

DEVICE OVERVIEW

General Description

The MFLP-00029CSP1 MMIC surface mount lowpass filter is an ideal solution for extremely small form factor, high rejection filtering. The MFLP-00029CSP1 features a 12.9 GHz 3 dBc cutoff and 24 dB passband return loss. Passive GaAs MMIC technology allows production of smaller filter constructions that replace larger form factor circuit board constructions. Tight fabrication tolerances allow for less unit-to-unit variation than traditional filter technologies. The MFLP-00029CSP1 is available as a 1.5x1.5 mm CSP. Low unit to unit variation allows for accurate simulations using the provided S2P file.



[Download s-parameters here](#)


Features

- Low Passband Insertion Loss with Fast Roll-off
- 24 dB Return Loss
- High Stop Band Suppression
- This product embodies Marki Microwave's U.S. Pat. 11,869,858.

Applications

- SATCOM
- Radar

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MFLP-00029CSP1	Passive GaAs MMIC 12.9 GHz Lowpass Filter	CSP1	RoHS REACH	Released	EAR99
<u>EVB-MFLP-00029</u>	Evaluation Board, Passive GaAs MMIC 12.9 GHz Lowpass Filter	EVB	RoHS REACH	Released	EAR99

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Electrical Specifications
 - Typical Performance Plot
- **Mechanical Data**
 - Outline Drawing
- **Footprint Image**
- **Evaluation Board**
 - Evaluation Board Outline Drawing


Revision History

Revision Code	Revision Date	Comment
-	2025-09-30	Initial Release




Port Configuration and Functions

Port Diagram

A top-down x-ray view of the MFLP-00029CSP1 package outline drawing is shown below.

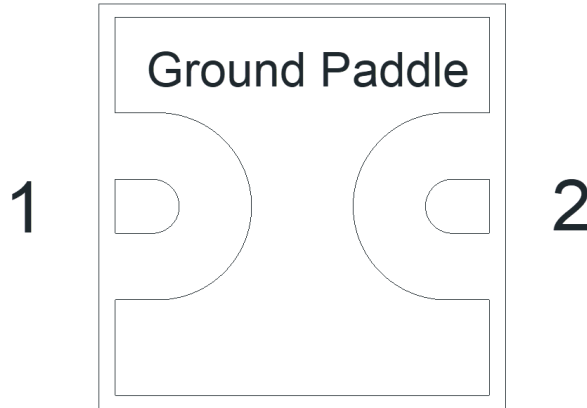

Port Functions

Port	Function	Description	DC Equivalent Circuit
Ground Paddle	Ground	CSP package ground path is provided through the ground paddle and should be connected to RF ground.	
Pin 1	Input	Pin 1 is DC short to Pin 2.	
Pin 2	Output	Pin 2 is DC short to Pin 1.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Port 1 DC Current	80	mA
Port 2 DC Current	80	mA

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Weight	Package name: CSP1	0.04g
Dimensions	-	1.50 x 1.50 mm
Moisture Sensitivity Level	-	MSL 3





Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Min and Max limits are guaranteed at TA=+25°C.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
1 dBc Passband	Configuration A, Temp = 25°C	-	10.26	-	-	-	GHz
3 dBc Passband	Configuration A, Temp = 25°C	-	12.9	-	-	-	GHz
30 dBc Rejection Point	Configuration A, Temp = 25°C	-	14.66	-	-	-	GHz
Passband Return Loss	Configuration A, Temp = 25°C	-	-	-	24	-	dB
Group Delay	Configuration A, Temp = 25°C	-	-	-	90	-	ps

Typical performance is de-embedded from evaluation board using automatic fixture removal (AFR).

Typical Performance Plot

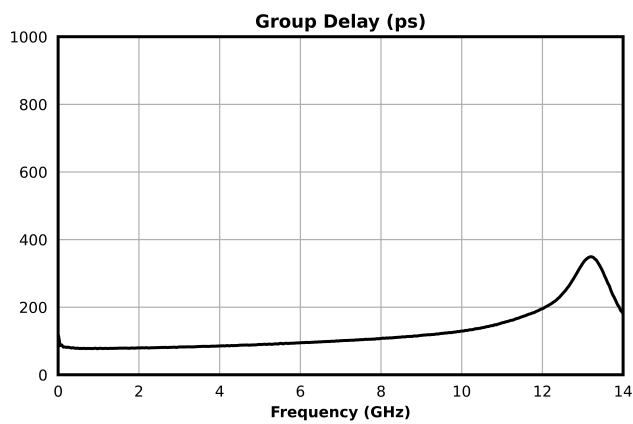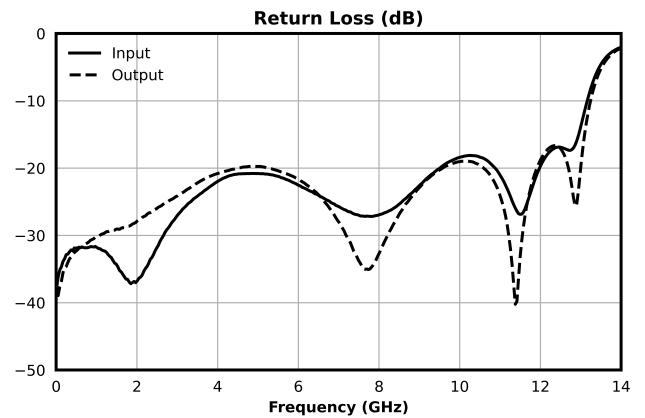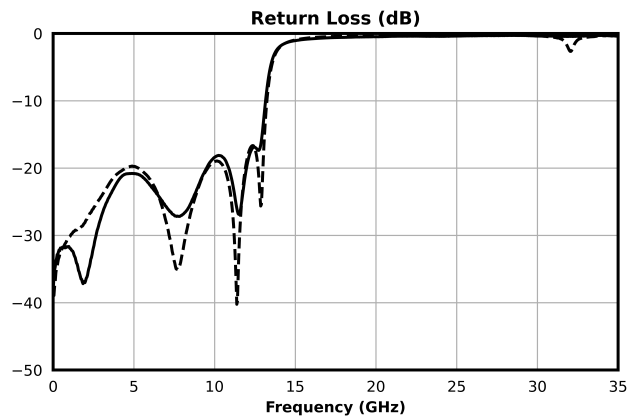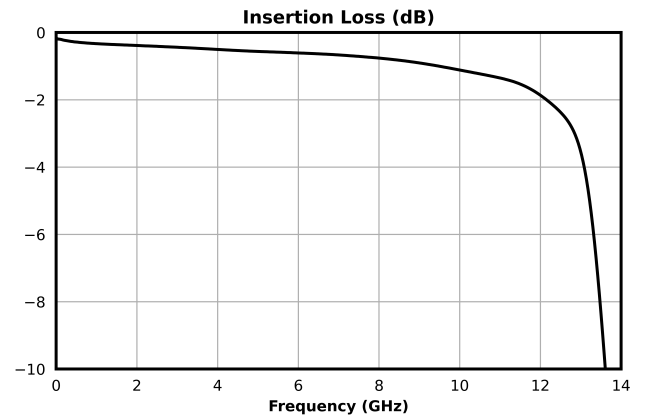

Mechanical Data


Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)


*All measurements are typical units in inch +/- .004" [millimeter +/- 0.1]

Edc	Year	QTR
A	2021	Q1
B	2021	Q2
C	2021	Q3
D	2021	Q4
E	2022	Q1
F	2022	Q2
G	2022	Q3
H	2022	Q4
I	2023	Q1
J	2023	Q2
K	2023	Q3
L	2023	Q4
M	2024	Q1
N	2024	Q2
D	2024	Q3
P	2024	Q4
Q	2025	Q1
R	2025	Q2
S	2025	Q3
T	2025	Q4
U	2026	Q1
V	2026	Q2
W	2026	Q3
X	2026	Q4
Y	2027	Q1
Z	2027	Q2
0	2027	Q3
1	2027	Q4
2	2028	Q1
3	2028	Q2
4	2028	Q3
5	2028	Q4
6	2029	Q1
7	2029	Q2
8	2029	Q3
9	2029	Q4


Top Down View



Side View

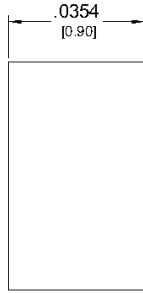

Bottom Up View

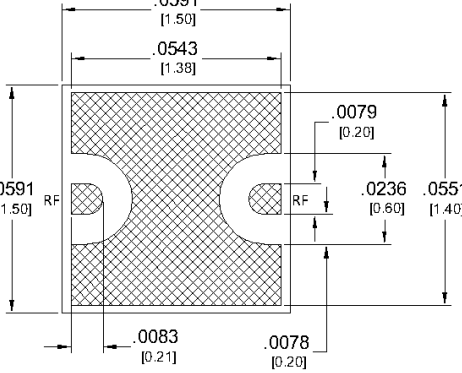

Part marking:
- Date code
XX - See table

XX	MFLP-####CSP1	EVB-MFLP-####
53	MFLP-00022CSP1	EVB-MFLP-00022
54	MFLP-00023CSP1	EVB-MFLP-00023
55	MFLP-00024CSP1	EVB-MFLP-00024
56	MFLP-00025CSP1	EVB-MFLP-00025
57	MFLP-00026CSP1	EVB-MFLP-00026
59	MFLP-00028CSP1	EVB-MFLP-00028
60	MFLP-00029CSP1	EVB-MFLP-00029
62	MFLP-00031CSP1	EVB-MFLP-00031

Notes: (Unless otherwise specified)

- Shaded areas are metalized.
- Finish: Ni: 0.5 - 2.5 μ m
Pd: 0.02 - 0.15 μ m
Au: 0.003 - 0.015 μ m

JUL 28 09 10 W 8 52 39 30 1 03
3 1/16 0.0005 1/16 1/16 1/16 1/16
TOL: 0.0005 0.0005 0.0005 0.0005 0.0005

MATERIAL:
FINISH: Note 2

NOTES:

DRAWN BY	DATE
LCG	4/23/25
SP	7/24/25
AVC	7/30/25

Marki
microwave www.markimicrowave.com

Outline
CSP1 Low Pass Filter


SIZE	CAGE CODE	DWG. NO.
A	0UC32	MFLP-####CSP1

SHEET 1 OF 1

Proprietary: This document was originated by and is the property of Marki Microwave. Unauthorized disclosure is prohibited.


Footprint Image

Download : [Footprint Drawing](#)

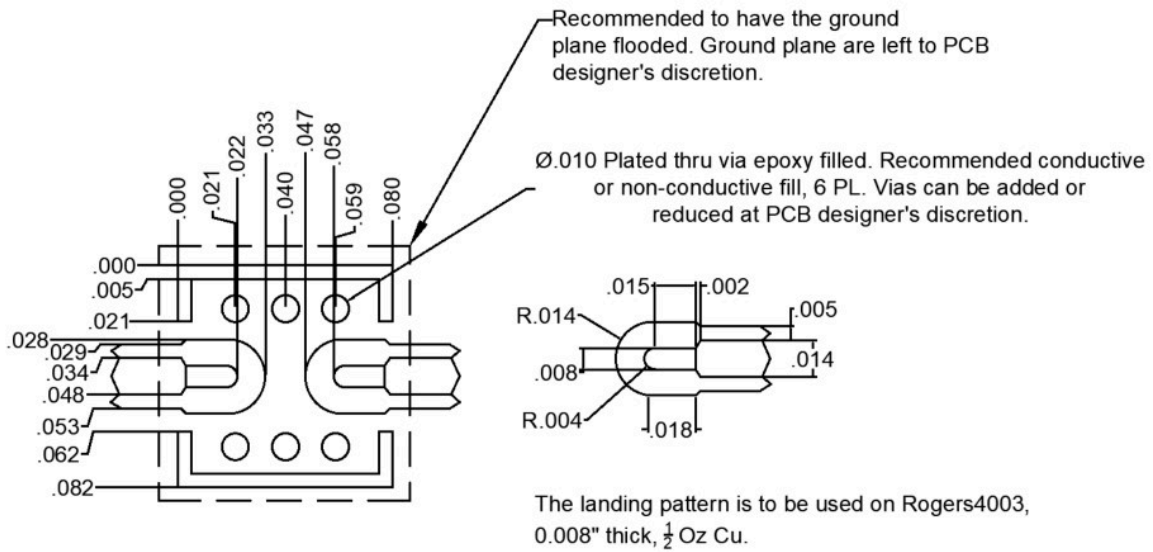

Evaluation Board - Outline Drawing

All measurements are typical

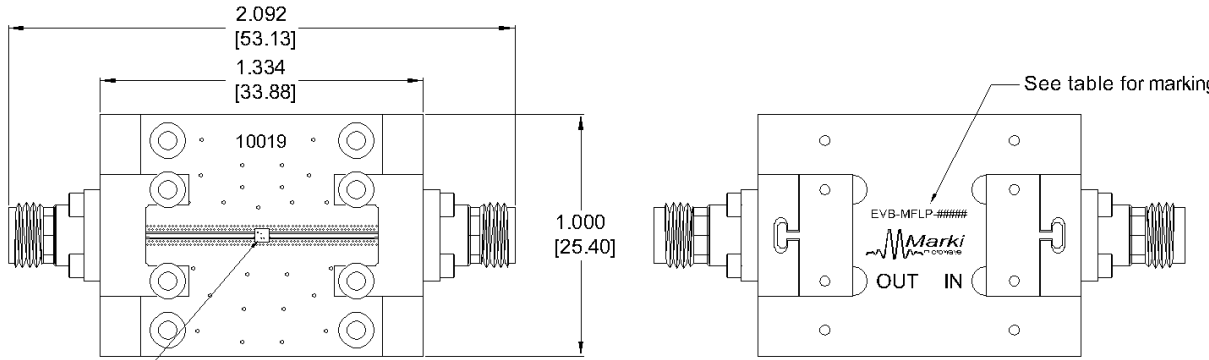

Part marking:
#: Date code
XX: See table

XX	MFLP-####CSP1	EVB-MFLP-####
53	MFLP-00022CSP1	EVB-MFLP-00022
54	MFLP-00023CSP1	EVB-MFLP-00023
55	MFLP-00024CSP1	EVB-MFLP-00024
56	MFLP-00025CSP1	EVB-MFLP-00025
57	MFLP-00026CSP1	EVB-MFLP-00026
59	MFLP-00028CSP1	EVB-MFLP-00028
60	MFLP-00029CSP1	EVB-MFLP-00029
62	MFLP-00031CSP1	EVB-MFLP-00031

Port	Connector Type
1, 2	2.92mm Female

Note: Connectors are not removeable.

NOTES:		Marki microwave www.markimicrowave.com	
DRAWN BY	DATE	Outline MFLP Eval Board CSP1	
LCG	5/14/25		
SP	7/24/25		
AVC	7/30/25	SIZE	CAGE CODE
DO NOT SCALE DRAWING		A	0UC32
		DWG. NO.	EVB-MFLP-####
		SHEET 1 OF 1	

RoHS Compliant (SN96.5/AG3.5) Components/Assembly

Proprietary: This document was originated by and is the property of Marki Microwave. Unauthorized disclosure is prohibited.

DISCLAIMER

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2025, Marki Microwave, LLC